

# NT4

X/Y Stereo Multi-Power Studio and Location 1/2" Condenser Microphone

**RØDE**  
MICROPHONES




## Features

- Stereo X/Y condenser microphone
- Dual externally biased 1/2" capsules with gold sputtered diaphragm
- Capsules closely matched with full frequency response
- Dual power operation
- Custom stereo cables included - 5 pin stereo XLR, Minijack (via included cable), and Dual 3-Pin XLR (via included cable)
- Custom twin head windshield (WS4) included
- Durable satin-nickel finish
- Surface mount circuitry
- Designed and manufactured in Australia
- Full 10 year warranty\*


## Specifications

Acoustic Principle	Pressure gradient	Directional Pattern	Cardioid
Frequency Range	20 Hz-20 kHz	Sensitivity	-38 dB re 1 Volt/Pascal (12 mV @ 94 dB SPL) +/- 2 dB @ 1kHz
Output Impedence	200Ω	Dimensions	Length - 231mm (9.0944") Diameter - 41mm (1.6141")
Output Connection	5 pin stereo XLR, Minijack (via included cable), and Dual 3-Pin XLR (via included cable)	Shipping Weight	2kg
Net Weight	480g		

## Frequency Response

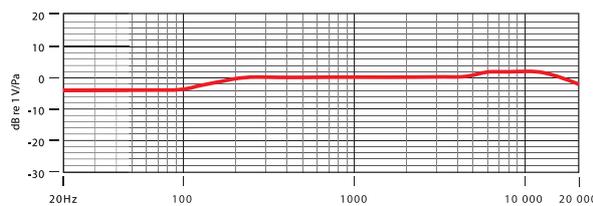

## Polar Pattern

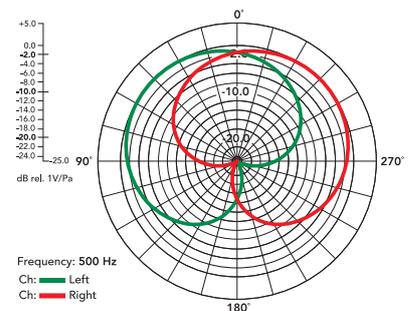

Frequency: 500 Hz  
Ch: Left  
Ch: Right

## Included Accessories

- RM3 stand mount
- RC4 case
- WS4 windshield
- NT4-DXLR stereo XLR lead
- NT4-MJ XLR to 3.5mm stereo cable



[www.rodemic.com](http://www.rodemic.com)

\*After online registration

Australia  
107 Carnarvon st, Silverwater NSW 2128 Australia  
Ph: +61 2 9648 5855    Fx: +61 2 9648 2455

USA  
PO Box 4189 Santa Barbara CA 93140 USA  
Ph: +1 805 566 7777    Fx: +1 805 566 0071