

# KA2272


# FM NOISE CANCELLER

## INTRODUCTION

The KA2272 is a monolithic integrated circuit for the FM noise canceller used in car stereos. It is used in combination with a PLL FM multiplex demodulator (such as the KA2266) with a pilot signal canceller.

## FEATURES

- Operation voltage range:  $V_{CC} = 8V \sim 15V$
- Low quiescent circuit current
- Low distortion: THD = 0.02% at  $V_1 = 300mV$
- Pilot signal compensation
- Built-in monostable multivibrator.
- Variable input type noise AGC system.

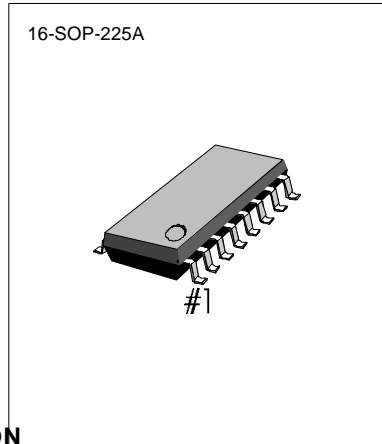

## ORDERING INFORMATION

## BLOCK DIAGRAM

Device	Package	Operating Temperature
KA2272D	16-SOP-225A	-20°C ~ +75°C

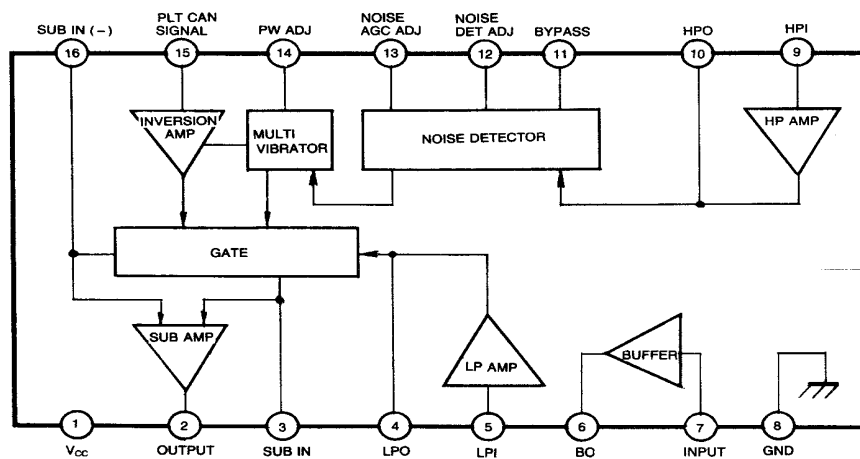


Fig. 1

**ABSOLUTE MAXIMUM RATINGS (Ta = 25)**

Characteristic	Symbol	Value	Unit
Supply Voltage	V <sub>CC</sub>	16	V
Power Dissipation	PD	300	Min
Operating Temperature	T <sub>OPR</sub>	-20 ~ + 75	°C
Storage Temperature	T <sub>STG</sub>	-40 ~ + 125	°C

**ELECTRICAL CHARACTERISTICS**(Ta = 25°C, V<sub>CC</sub> = 12V, 300mV, f = 1KHz, unless otherwise specified)

Characteristic	Symbol	Test Conditions		Min	Typ	Max	Unit
		Input Pin	Output Pin				
Quiescent Circuit Current	I <sub>CCQ</sub>				16	25	mA
Voltage Gain	G <sub>V</sub>	V <sub>7</sub> = 300mV, f = 1KHz	Output	-0.2	0.8	1.8	dB
Output Voltage	V <sub>O</sub>	V <sub>7</sub> , f = 1KHz	Output THD = 1%	1.3			V
Total Harmonic Distortion	THD	V <sub>7</sub> = 300mV, f = 1KHz	Output		0.01	0.03	K%
Input Resistance	R <sub>I</sub>	V <sub>7</sub> = 300mV, f = 1KHz		36	51	67	dB
Low pass AMP Gain	G <sub>V(LP)</sub>	V <sub>5</sub> = 300mV, f = 1KHz	V <sub>4</sub>	0	0.83	1.58	dB
High pass AMP Gain	A <sub>VH</sub>	V <sub>9</sub> = 100mV f = 200KHz	V <sub>10</sub>	1.58	2.92	4.35	V
Inverted Amp Distortion	THD	f = 19KHz	Output			0.1	%
Inverted Amp Dynamic Range	V <sub>O</sub>	V <sub>15</sub> = 100mV f = 19KHz	Output THD = 1%	300			mV
Inverted Amp Gain	G <sub>V</sub>	V <sub>15</sub> = 100mV f = 19KHz	Output	0	2.28	4.08	dB
Output Noise Voltage	V <sub>NO</sub>	Bypass V <sub>7</sub> V <sub>15</sub> to GND	Output, 100KHz LPF		30	60	μV
Gate Time	t <sub>G</sub>	V <sub>O</sub> = 100mV <sub>p-p</sub> , 1μs, f = 1KHz	Output	13	21	30	μsec
Noise Sensitivity	SN	V <sub>7</sub> , 1μs, f = 1KHz	Output			30	mV <sub>p-0</sub>

# KA2272

# FM NOISE CANCELLER

## TEST CIRCUIT



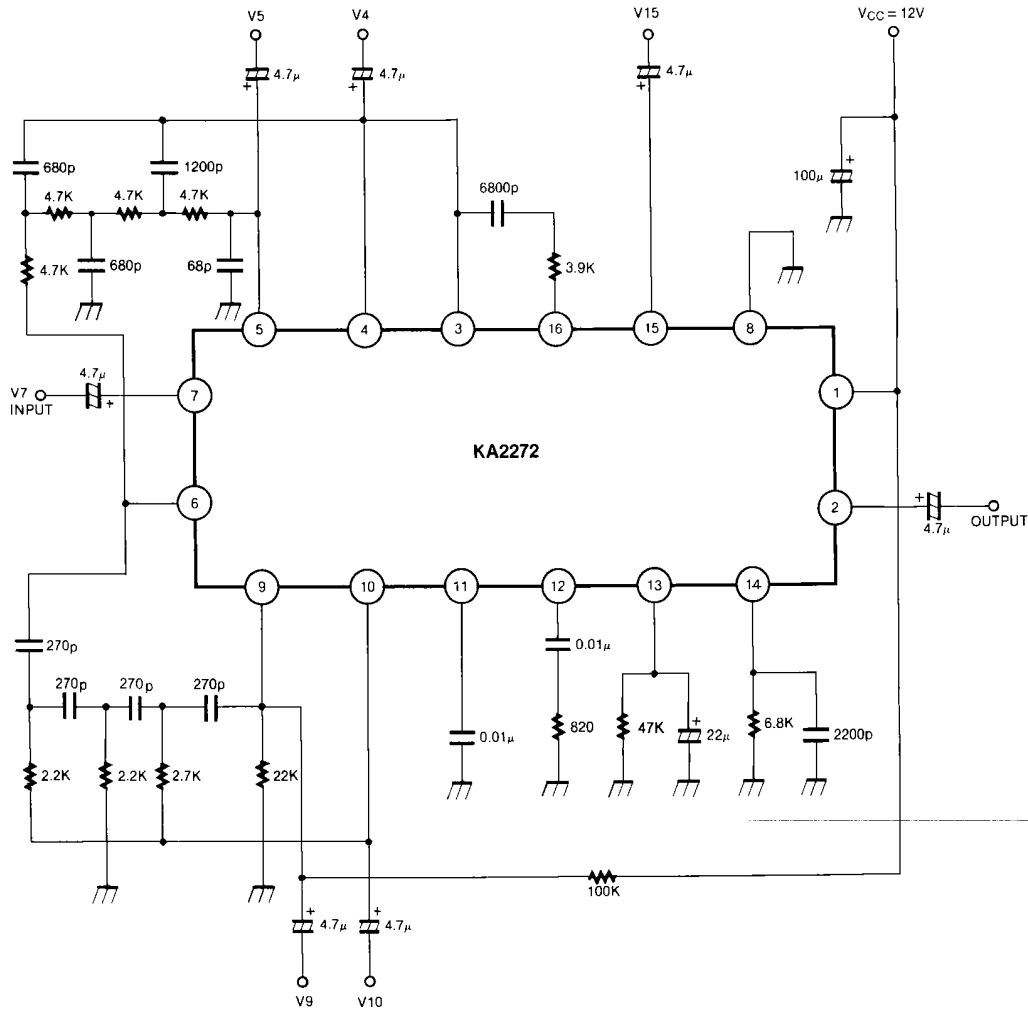


Fig. 2


QUIESCENT CIRCUIT CURRENT-SUPPLY VOLTAGE

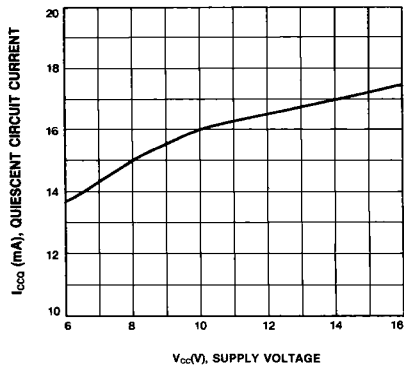


TOTAL HARMONIC DISTORTION-INPUT SIGNAL LEVEL

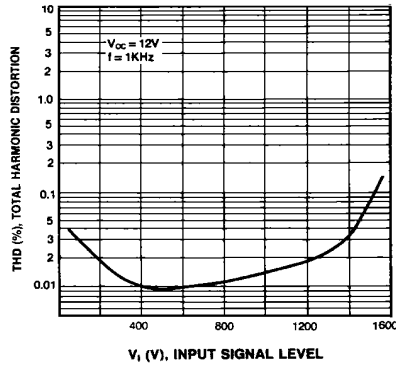


TOTAL HARMONIC DISTORTION-FREQUENCY

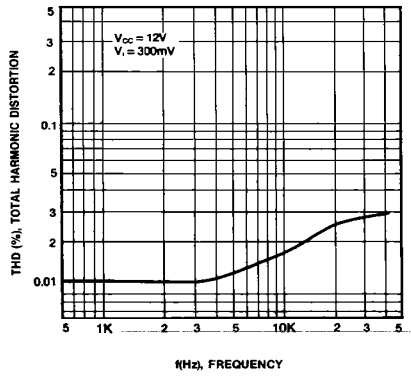


NOISE SENSITIVITY-SUPPLY VOLTAGE

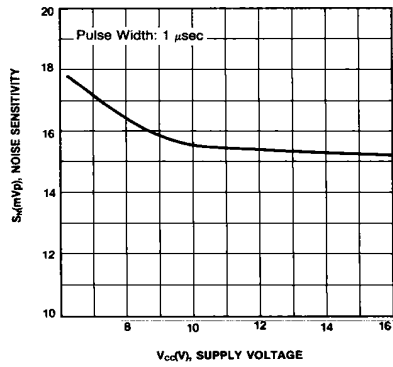

GATE TIME-SUPPLY VOLTAGE

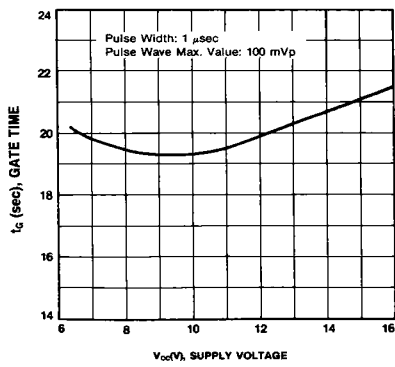


SEPARATION-FREQUENCY

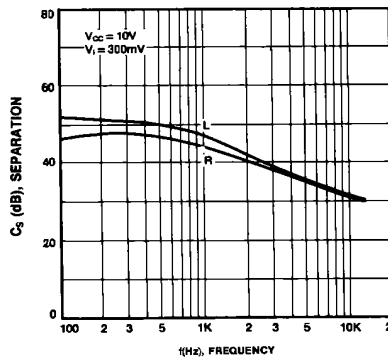

KA2272

FM NOISE CANCELLER

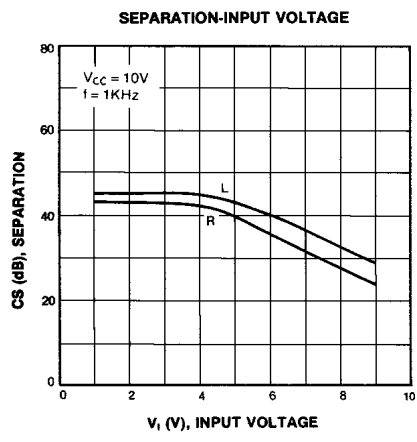

# KA2272

# FM NOISE CANCELLER

## APPLICATION CIRCUIT


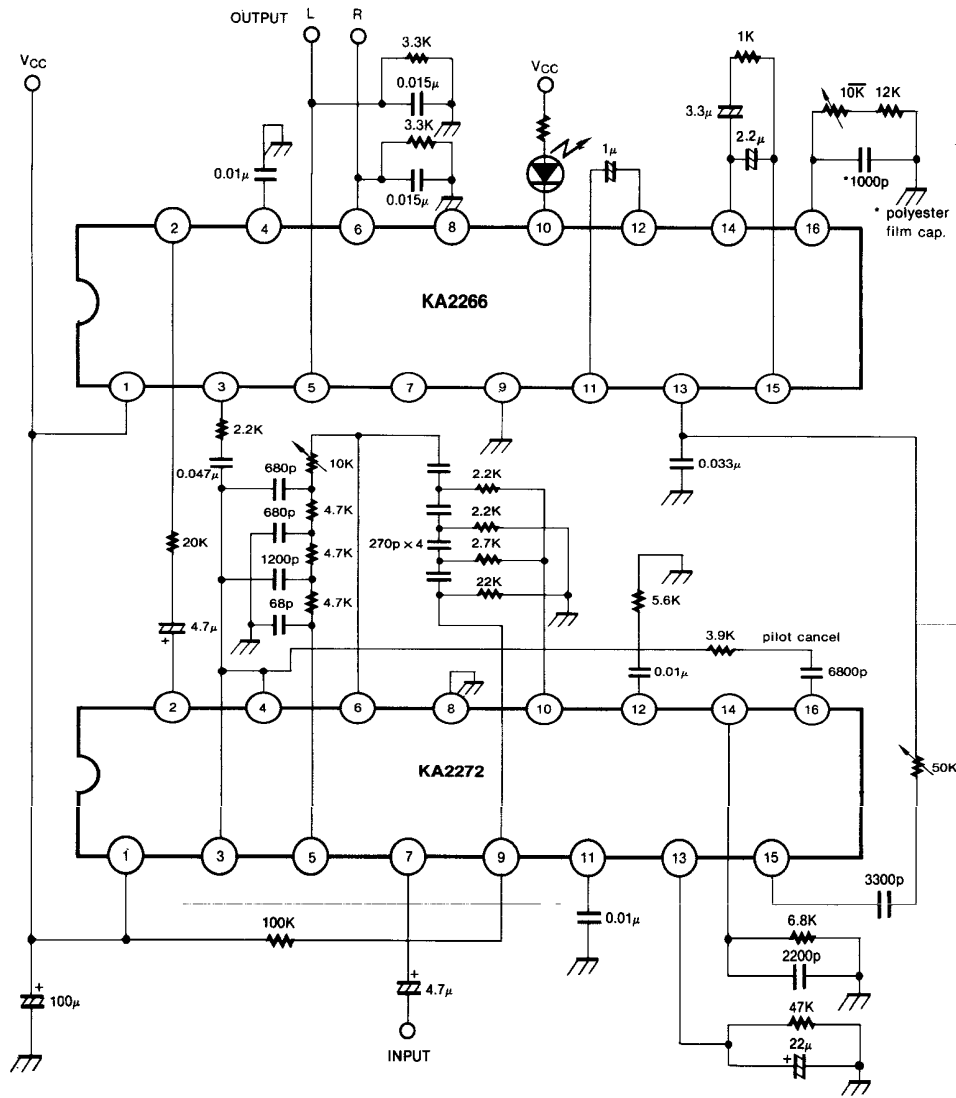


Fig. 3

# 16-SOP-225A

Dimensions in Millimeters/inches

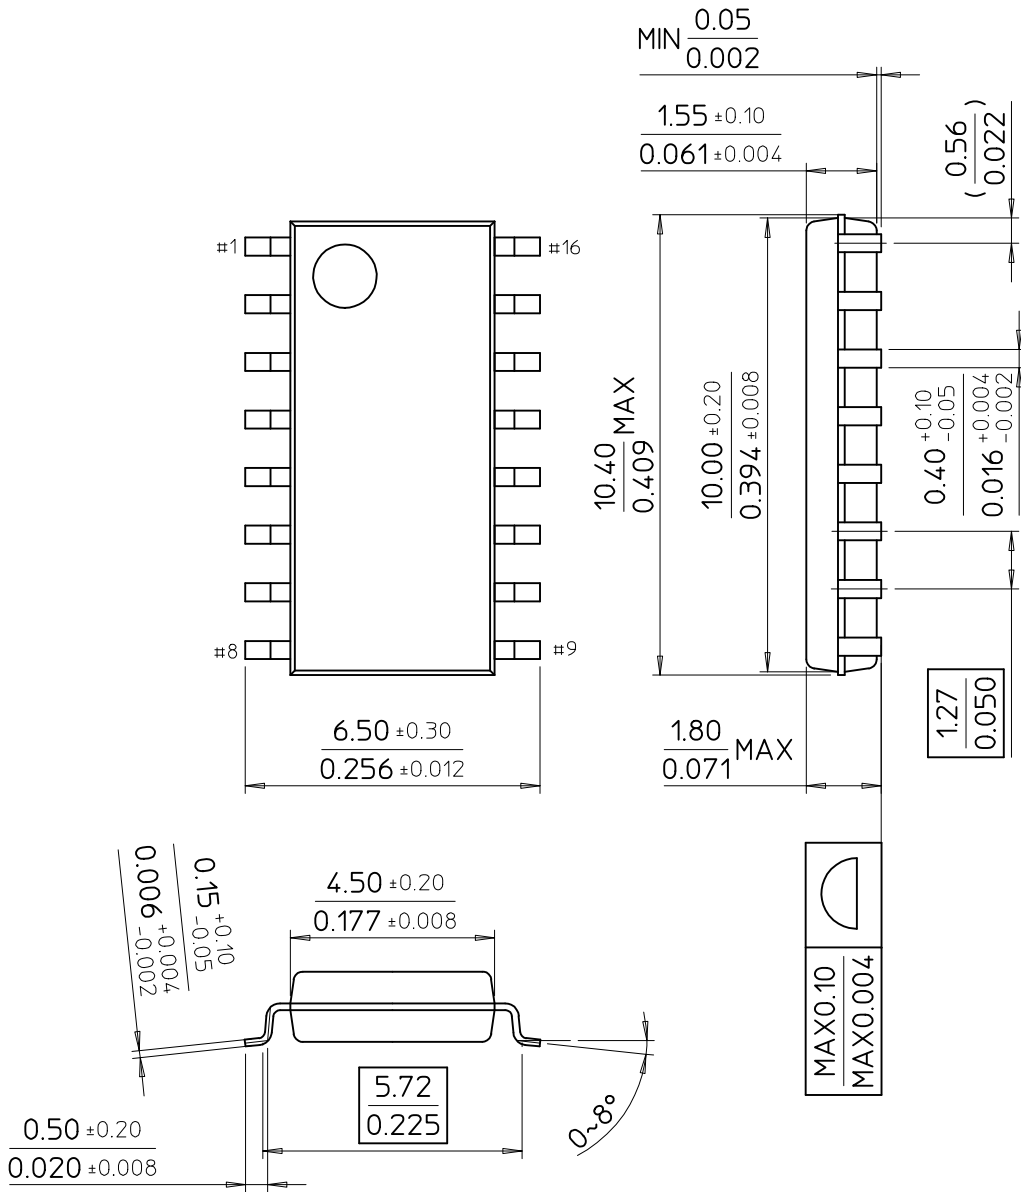

SAMSUNG ELECTRONICS CO.,LTD.