


AM/FM RADIO

■ GENERAL DESCRIPTION

The NJM2241 is monolithic integrated circuit in a 24-lead small outline package designed for use in 3-6V portable AM/FM radio receivers.

The functions incorporated are AM RF amplifier, AM mixer, FM/AM IF amplifier, FM/AM detector, FM/AM detector, FM/AM tuning/indicator, AM AGC circuit, Audio Power amplifier.

■ PACKAGE OUTLINE




NJM 2241 M

■ FEATURES

- Wide Operating Voltage (1.8~6.0V)
- Tuning Indicator LED direct drive (10mA Max.)
- Very Simple DC switching of FM/AM
- High AM signal handling
- 4Ω speaker direct drive
- Low tweet
- Most suitable to use with NJM2236
- Package Outline DMP24
- Bipolar Technology

■ BLOCK DIAGRAM

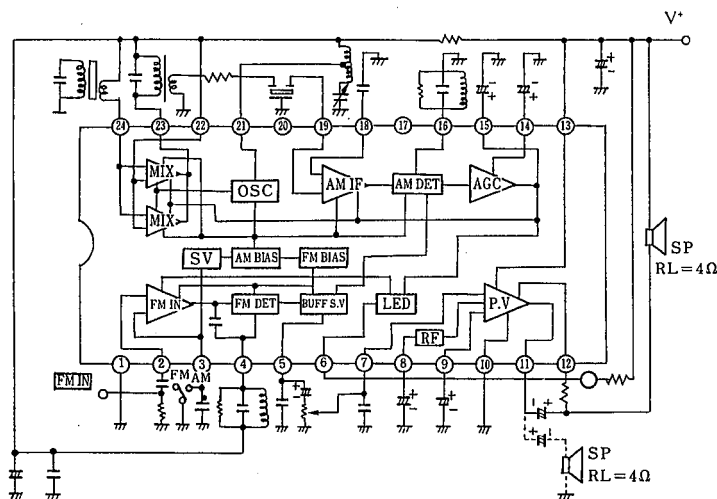

(note) Dotted line shows $V_{CC}=4.5V$

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V ⁺	8	V
Lamp Current	I _{Lamp(Max)}	10	mA
Output Current	I _{O(peak)}	550	mA
Power Dissipation	P _D	700	mW
Operating Temperature Range	T _{opr}	-20~+75	°C
Storage Temperature Range	T _{stg}	-40~+125	°C

■ ELECTRICAL CHARACTERISTICS

(V⁺=3V, Ta=25°C, FM: f=10.7MHz, Δf=22.5kHz dev., fm=1kHz

AM: f=1MHz, Mod=30%, fm=1kHz Unless otherwise noted)

CHARACTERISTICS	SYMBOLS	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Operating Current	I _{CC} (FM)	V _{IN} =0	—	15	20	mA
	I _{CC} (AM)	V _{IN} =0	—	15	20	
F M	-3dB Limiting Sensitivity	V _{IN(lim)}	—	36	42	dBμ
	Detection Output Voltage	V _{OD}	22	31	44	mVrms
	Signal to Noise Ratio	S/N	—	70	—	dB
	Total Harmonic Distortion	THD	—	0.3	—	%
	Am Rejection	AMR	—	33	—	dB
	Lamp Lighting Sensitivity	V _L	—	47	55	dBμ
A M	Voltage Gain	G _V	5	11	17	mVrms
	Detection Output Voltage	V _{OD}	22	31	44	mVrms
	Signal to Noise Ratio	S/N	—	46	—	dB
	Total Harmonic Distortion	THD1	—	1.5	—	%
		THD2	—	4.0	—	
	Local OSC Stop Voltage	V _{stop}	—	1.0	1.5	V
P W	Lamp Lighting Sensitivity	V _L	—	30	—	dBμ
	Voltage Gain	G _V	37	40	43	dB
	Output Power	P _{OD1}	180	220	—	mW
		P _{OD2}	—	500	—	
	Total Harmonic Distortion	THD	—	0.5	2.0	%
W	Output Noise Voltage	V _{NO}	—	0.18	—	mVrms

4


NJM2241

■ TERMINAL VOLTAGE AT NO SIGNAL





($V^+ = 3V$, $T_a = 25^\circ C$)

CHARACTERISTICS		SYMBOLS	TYPICAL VALUES		UNIT
PIN NO	FUNCTION		AT AM	AT FM	
1	GND	V_1	0	0	V
2	FM IF IN	V_2	2.4	2.0	V
3	FM/AM Switch	V_3	0	2.0	V
4	FM DET	V_4	2.9	2.9	V
5	DET OUT	V_5	0.4	0.7	V
6	LED DRIVER	V_6	—	—	V
7	PW IN	V_7	0	0	V
8	PW REF	V_8	1.35	1.35	V
9	PW Bipass	V_9	0.6	0.6	V
10	PW GND	V_{10}	0	0	V
11	PW OUT	V_{11}	1.5	1.5	V
12	PW Bootstrap	V_{12}	2.8	2.8	V
13	$V^+ 1$	V_{13}	3.0	3.0	V
14	AGC1	V_{14}	0.6	0	V
15	AGC2	V_{15}	0.6	0	V
16	AM DET	V_{16}	0	0	V
17	Not Use	—	—	—	—
18	AM Bipass	V_{18}	1.3	0	V
19	AM IF IN	V_{19}	1.3	0	V
20	Not Use	—	—	—	—
21	AM Osc	V_{21}	2.9	2.9	V
22	$V^+ 2$	V_{22}	2.9	2.9	V
23	AM MIX OUT	V_{23}	2.9	2.9	V
24	AM RF IN	V_{24}	2.9	2.9	V

■ TEST CIRCUIT

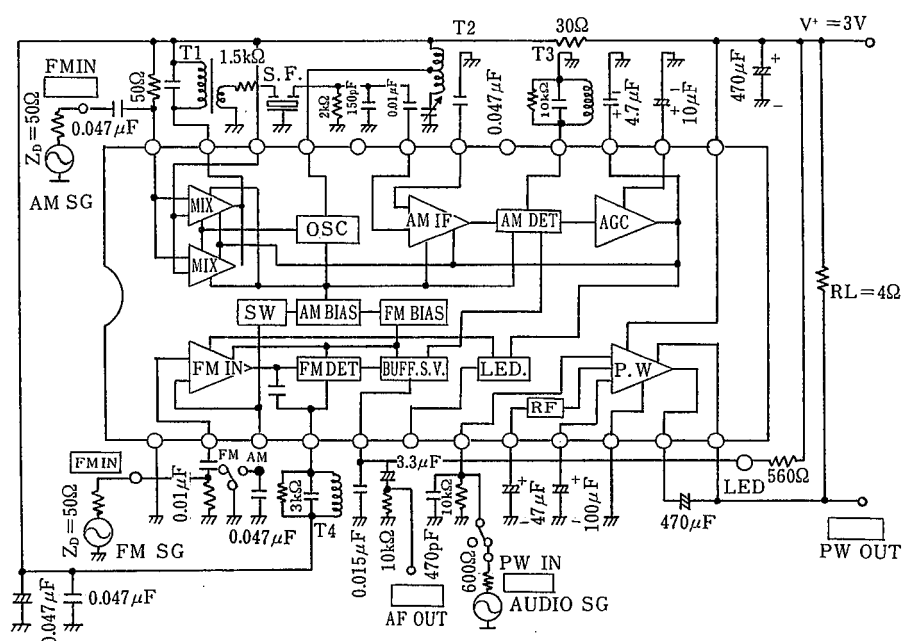

■ TEST CIRCUIT COIL DATA

COIL NO.	F ₀	Q ₀	TURNS	C ₀	
T ₁ : AM IFT (MIX OUT)	455kHz	①-③ 80	①-③ 60 T ④-⑥ 16 T Wire : 0.09mmφ UEW SUMIDA 2150-2173-302	①-③ 1500pF	 Bottom View
T ₂ : AM OSC	796kHz	①-③ 125	①-② 15 T ②-③ 89 T Wire : 0.06mmφ UEW SUMIDA 2157-2239-213A	—	 Bottom View
T ₃ : AM DET	455kHz	①-③ 105	①-③ 127 T Wire : 0.06mmφ UEW SUMIDA 2150-2083-061	①-③ 330pF	 Bottom View
T ₄ : FM DET	10.7MHz	①-③ 100	①-③ 10 T Wire : 0.12mmφ UEW SUMIDA 2153-4095-331	①-③ 150pF	 Bottom View


NJM2241

INPUT OUTPUT IMPEDANCE


CHARACTERISTICS	SYMBOLS	CIRCUITS	TEST CONDITIONS	TYP.	UNIT
Pin 2 Input Impedance (FM)	RIN2 CIN2	1	$f=10.7\text{MHz}$	4.6 5.0	$k\Omega$ pF
Pin 24 Input Impedance (AM)	RIN24 CIN24	2	$f=1\text{kHz}$	20 11	$k\Omega$ pF
Pin 19 Input Impedance (AM)	RIN19 CIN19	3	$f=455\text{kHz}$	6 3.7	$k\Omega$ pF
Pin 23 Output Impedance (AM)	RO23 CO23	4	$f=455\text{kHz}$	2.5 5.5	$k\Omega$ pF
Pin 16 Output Impedance (AM)	RO16 CO16	5	$f=455\text{kHz}$	100 5.0	$k\Omega$ pF

4

TEST CIRCUIT 1 (Pin 2 FM Input Resistance, Capacitance)

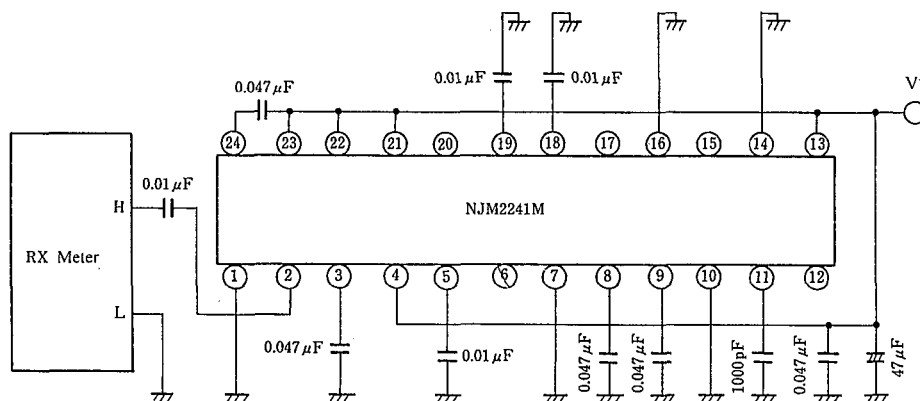

TEST CIRCUIT 2 (Pin 24 AM Input Resistance, Capacitance)

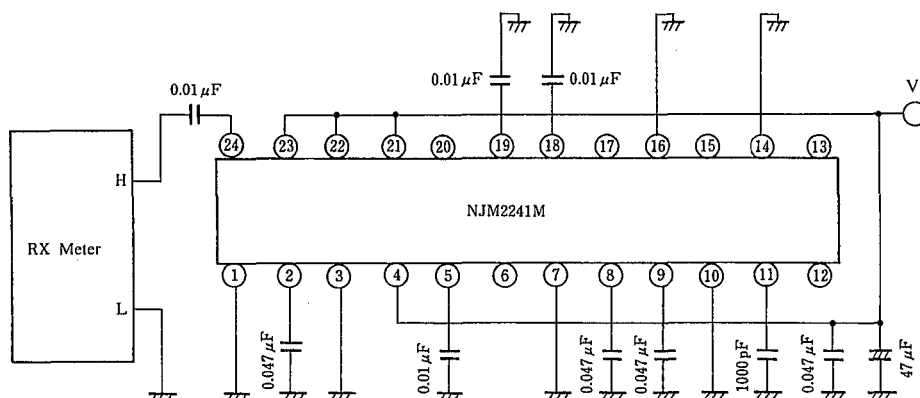



■ **TEST CIRCUIT 5** (Pin 16 AM DET Output Resistance, Capacitance)



NJM2241

■ NOTES


1. The frequency characteristics AM and FM mode

The output impedance of pin5 (Ro5) and external capacitor C1 decide frequency characteristics.

The value of Ro5 turns to 10k Ω at AM mode and 5k Ω at FM mode.

Accordingly should consider above, trim C1 to get proper frequency response.

Besides should design the location of C1 closer to pin1 (GND) to get low tweet.

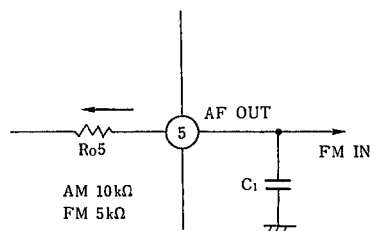

2. Loading speaker

Recommend to connect the speaker between pin11 (Vcc) and pin10 (bootstrap) at $V_s = 3V$ for better low supply to voltage operation. When Vcc is above 4.5V, recommend the speaker connection between pin9 (PW OUT) and (GND) through a coupling capacitor.







3. Termination to the power stage

The audio signal of output pin5 includes carrier component slightly, therefore a capacitor between pin5 and GND have to be connected to decrease carrier component.



4. Supply voltage start-up

The supply voltage of radio circuit block should not start up before power stage start-up.





■ TYPICAL CHARACTERISTICS

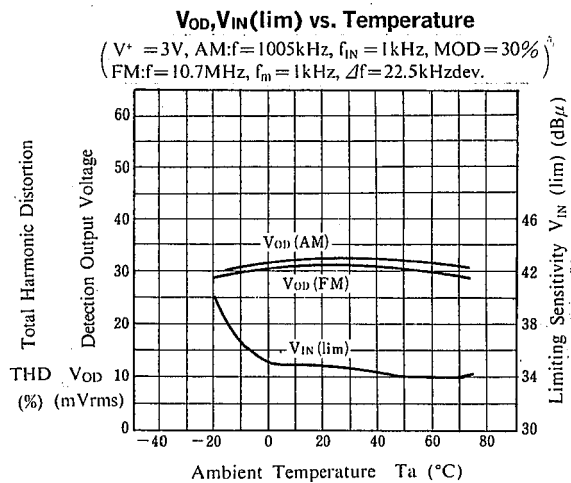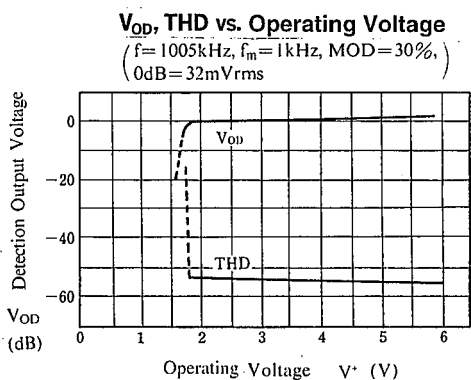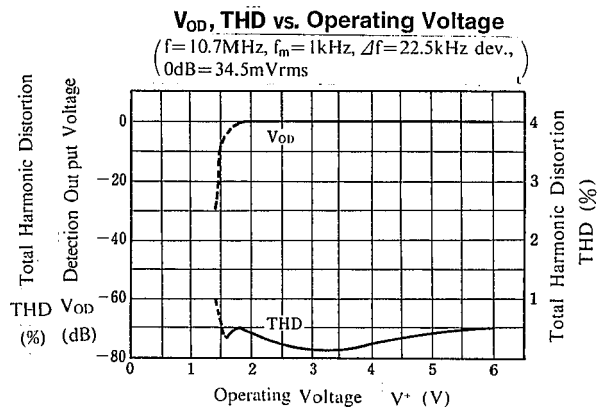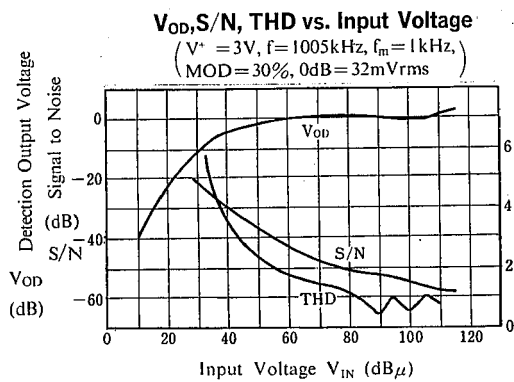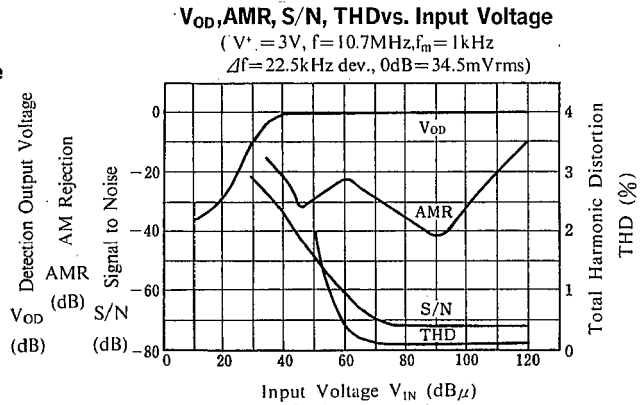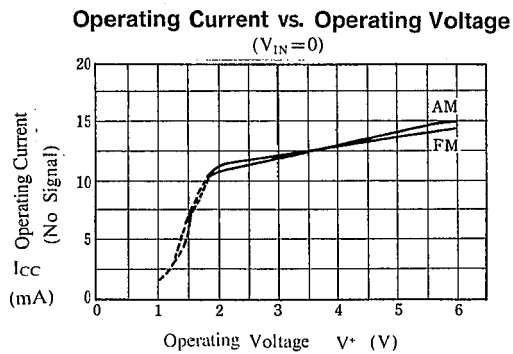






■ TYPICAL CHARACTERISTICS

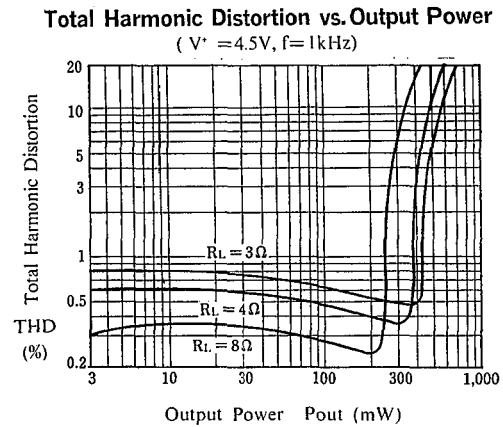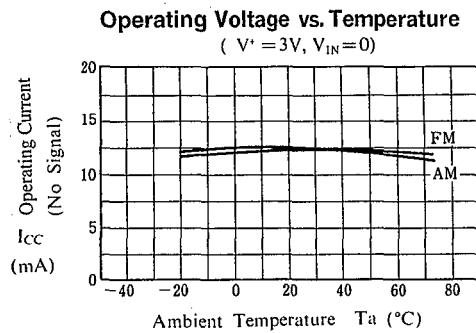

4

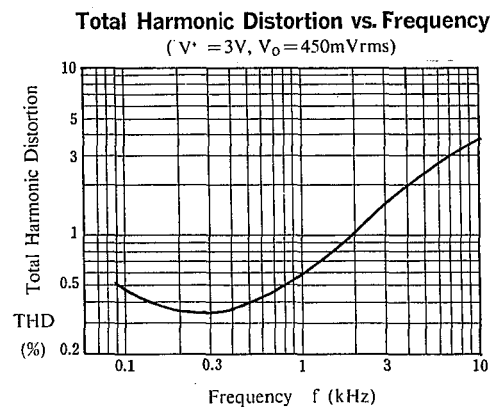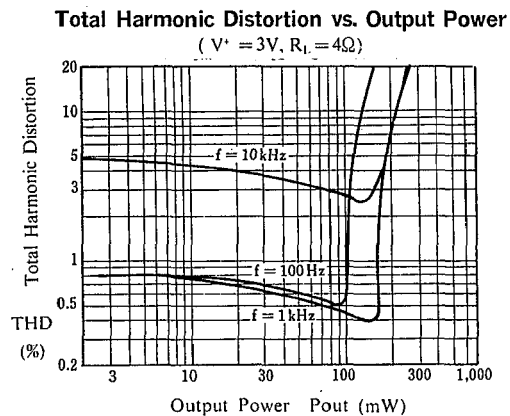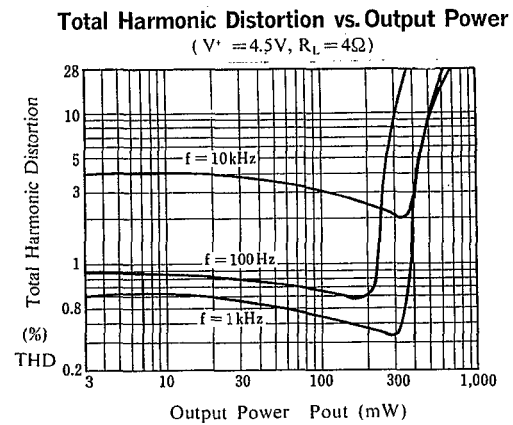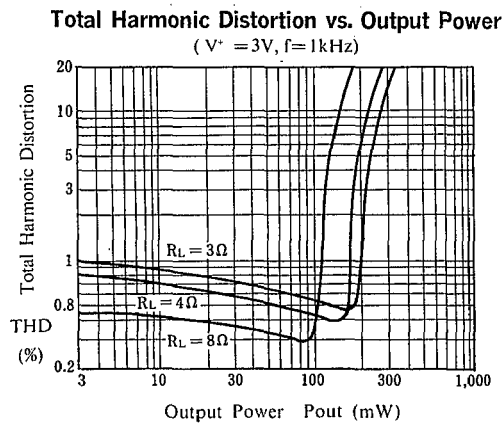


■ TYPICAL CHARACTERISTICS

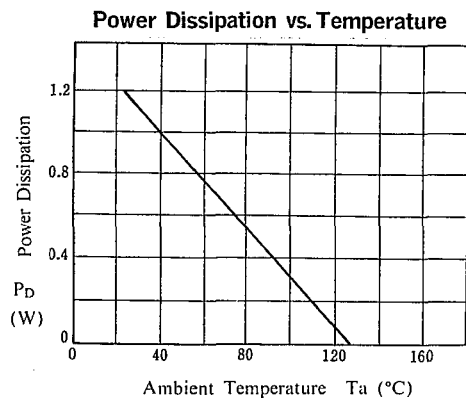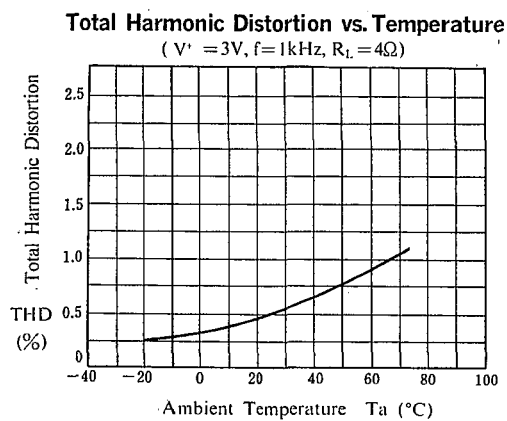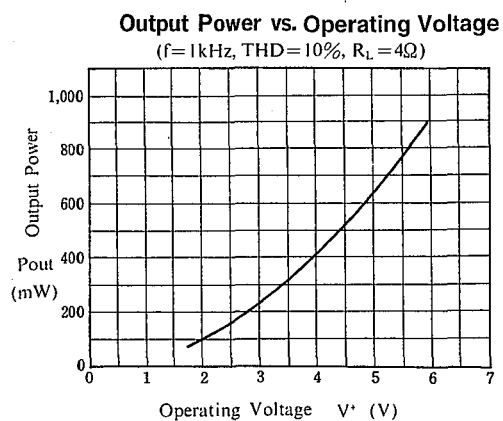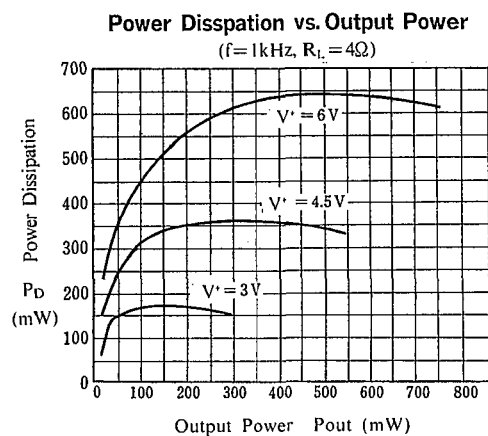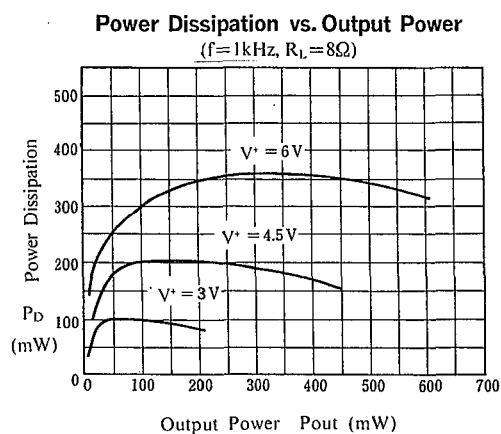

4

NJM2241





■ FM/AM RADIO APPLICATION CIRCUIT

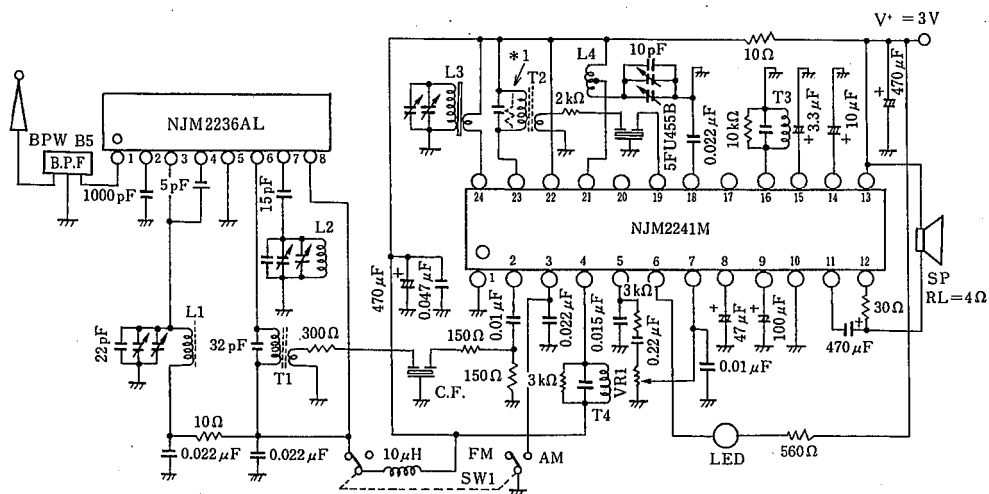

Resistor should be located at *1

if the Trans (T2) is high Q

■ FM/AM RADIO APPLICATION CIRCUIT

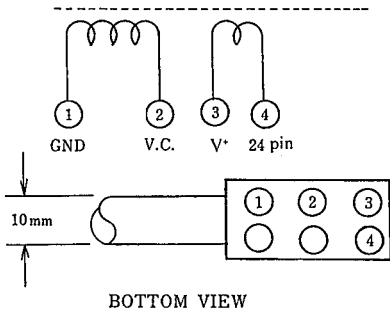COIL NO.	F ₀	Q ₀	TURNS	C ₀	
L ₁ : RF Coil	100 MHz	100	0.7mmφ 2 $\frac{1}{4}$ T SUMIDA 0295-057	22pF (ext.)	 Ferrite Core
L ₂ : OSC Coil	100 MHz	100	0.7mmφ 2 $\frac{1}{2}$ T SUMIDA 0295-056	30pF (ext.)	 Ferrite Core
L ₃ : AM ANT	796 kHz	①-② 200	①-② 100 T L=600μH ③-④ 17 T Wire : 4/0.07mm UATC Core : 10mmφ×80mm MITUMI YI-7160-1	—	 BOTTOM VIEW
L ₄ : AM OSC	796 kHz	①-③ 125	①-② 15 T ②-③ 89 T Wire : 0.06mmφ UEW SUMIDA 2157-2239-213A	—	 BOTTOM VIEW

NJM2241

■ FM/AM RADIO APPLICATION CIRCUIT

COIL NO.	F ₀	Q ₀	TURNS	C ₀	BOTTOM VIEW
T ₁ : FM IFT	10.7 MHz	①-③ 90	①-③ 11 T ④-⑥ 2 T Wire : 0.12mmφ UEW SUMIDA 2153-414-041	①-③ 82 pF	Bottom View
T ₂ : AM IFT	455 kHz	①-③ 80	①-③ 60 T ④-⑥ 16 T Wire : 0.09mmφ UEW SUMIDA 2150-2173-302	①-③ 1500 pF	Bottom View
T ₃ : AM DET	455 kHz	①-③ 105	①-③ 127 T Wire : 0.06mmφ UEW SUMIDA 2150-2083-061	①-③ 330 pF	Bottom View
T ₄ : FM DET	10.7 MHz	①-③ 100	①-③ 10 T Wire : 0.12mmφ UEW SUMIDA 2153-4095-331	①-③ 150 pF	Bottom View

NJM2241

MEMO

[CAUTION]
The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.