


AM / FM IF + MPX

TA8186P is the AM/FM IF + MPX system IC, which is designed for radio cassette recorders and music centers.

FEATURES


- Compact package (DIP16), and small number of external parts.
- AM IFT is also used for VCO resonator.
- Built-in FM soft muting circuit.
- Operating supply voltage range :
 $V_{CC}(\text{opr}) = 3.5 \sim 13\text{V}$ ($T_a = 25^\circ\text{C}$)
 At FM soft mute using :
 $V_{CC}(\text{opr}) = 3.5 \sim 9\text{V}$ ($T_a = 25^\circ\text{C}$)

※ Handle with care to prevent devices from deteriorations by static electricity.

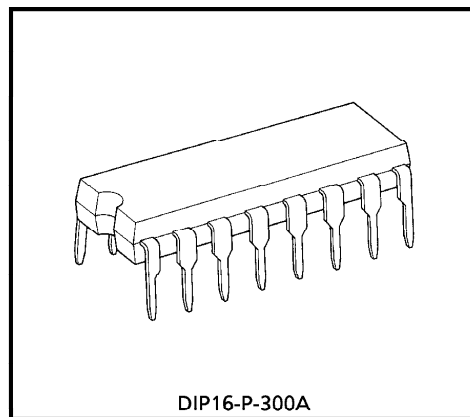

Weight : 1.00g (Typ.)

BLOCK DIAGRAM

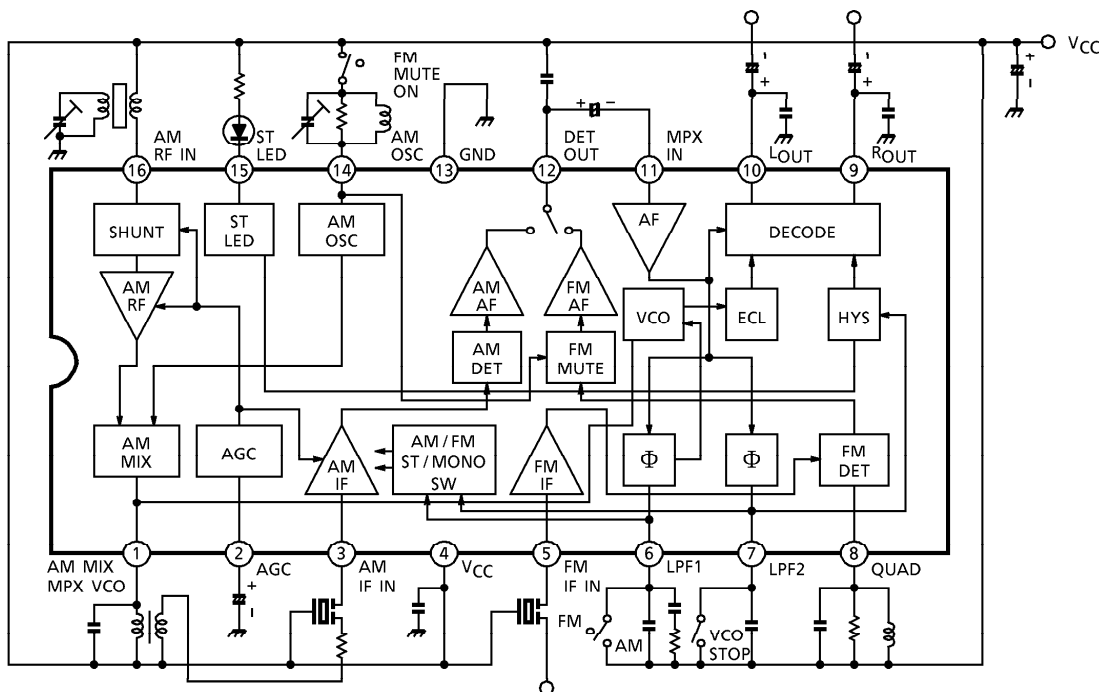

© The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.

© These TOSHIBA products are intended for use in general commercial applications (office equipment, communication equipment, measuring equipment, domestic appliances, etc.). please make sure that you consult with us before you use these TOSHIBA products in equipment which requires extraordinarily high quality and/or reliability, and in equipment which may involve life threatening or critical application, including but not limited to such uses as atomic energy control, airplane or spaceship instrumentation, traffic signals, medical instrumentation, combustion control, all types of safety devices, etc. TOSHIBA cannot accept and hereby disclaims liability for any damage which may occur in case the TOSHIBA products are used in such equipment or applications without prior consultation with TOSHIBA.



TERMINAL EXPLANATION (Terminal voltage shows the typical value at $T_a = 25^\circ\text{C}$, $V_{CC} = 6\text{V}$, and non-signal test circuit)

PIN No.	TERMINAL NAME	CONTENTS	INTERNAL CIRCUIT	TERMINAL VOLTAGE (V)	
				FM	AM
1	AM MIX MPX VCO	<ul style="list-style-type: none"> AM mixer output terminal AM IFT is also used for VCO resonator 		6.0	6.0
2	AGC	AM AGC terminal It is necessary to connect external capacitance		0.4	0.3
3	AM IF IN	AM IF Amp input terminal		6.0	6.0
4	VCC	Power supply	—	6.0	6.0
5	FM IF IN	FM IF Amp input terminal		6.0	6.0
6	LPF1	<ul style="list-style-type: none"> LPF terminal for phase detector Bias terminal for AM/FM switch circuit $V_6 = V_{CC} \rightarrow \text{AM}$ $V_6 = \text{Open} \rightarrow \text{FM}$ 		4.3 (At VCO STOP) 5.6	6.0

PIN No.	TERMINAL NAME	CONTENTS	INTERNAL CIRCUIT	TERMINAL VOLTAGE (V)	
				FM	AM
7	LPF2	<ul style="list-style-type: none"> • LPF terminal for synchronous detector • VCO stop terminal $V_7 = V_{CC} \rightarrow VCO \text{ Stop}$ 		4.3	6.0
8	QUAD	FM QUAD detector terminal FM QUAD coil is connected.		6.0	6.0
9	R _{out}	MPX audio output terminal		3.5	3.5
10	L _{out}			3.5	3.5
11	MPX IN	MPX input terminal		3.3	3.3
12	DET OUT	FM / AM detector output terminal		1.3	1.3
13	GND	GND terminal	—	0	0

PIN No.	TERMINAL NAME	CONTENTS	INTERNAL CIRCUIT	TERMINAL VOLTAGE (V)	
				FM	AM
14	AM OSC	<ul style="list-style-type: none"> • AM OSC terminal • Bias terminal for FM soft mute switch circuit $V_{14} = \text{Open} \rightarrow \text{FM MUTE ON}$		6.0 (At FM MUTE ON 5.4)	6.0
15	ST LED	<ul style="list-style-type: none"> • Stereo LED terminal • VCO monitor terminal 		5.4	5.4
16	AM RF IN	AM RF Amp input terminal ($R_{in} = 1M\Omega$, at $f_{in} = 1\text{MHz}$)		6.0	6.0

MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Supply Voltage	V_{CC}	15	V
LED Current	I_{LED}	10	mA
LED Voltage	V_{LED}	15	V
Power Dissipation	P_D (Note)	750	mW
Operating Temperature	T_{opr}	-25~75	$^\circ\text{C}$
Storage Temperature	T_{stg}	-55~150	$^\circ\text{C}$

(Note) Derated above $T_a = 25^\circ\text{C}$ in the proportion of $6\text{mW}/^\circ\text{C}$.


ELECTRICAL CHARACTERISTICS

Unless otherwise specified, $T_a = 25^\circ\text{C}$, $V_{CC} = 6\text{V}$,
 FM IF : $f = 10.7\text{MHz}$, $\Delta f = \pm 22.5\text{kHz}$, $f_m = 1\text{kHz}$
 AM : $f = 1\text{MHz}$, $\text{MOD} = 30\%$, $f_m = 1\text{kHz}$
 MPX : $f_m = 1\text{kHz}$

CHARACTERISTIC		SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT		
Supply Current		I_{CC} (FM)	1	FM Mode, $V_{in} = 0$	—	17.0	25.0	mA		
		I_{CC} (AM)	1	AM Mode, $V_{in} = 0$	—	15.0	22.0			
FM IF	Input Limiting Voltage	V_{in} (lim)	1	-3dB limiting point	38	43	48	$\text{dB}\mu\text{V}$ EMF		
	Recovered Output Voltage	V_{OD}	1	$V_{in} = 80\text{dB}\mu\text{V}$ EMF	55	80	110	mV_{rms}		
	Signal To Noise Ratio	S/N	1	$V_{in} = 80\text{dB}\mu\text{V}$ EMF	—	70	—	dB		
	Total Harmonic Distortion	THD	1	$V_{in} = 80\text{dB}\mu\text{V}$ EMF	—	0.1	—	%		
	AM Rejection Ratio	AMR	1	$V_{in} = 80\text{dB}\mu\text{V}$ EMF	—	45	—	dB		
AM	Gain	G_V	1	$V_{in} = 26\text{dB}\mu\text{V}$ EMF	20	35	50	mV_{rms}		
	Recovered Output Voltage	V_{OD}	1	$V_{in} = 60\text{dB}\mu\text{V}$ EMF	55	80	110	mV_{rms}		
	Signal To Noise Ratio	S/N	1	$V_{in} = 60\text{dB}\mu\text{V}$ EMF	—	42	—	dB		
	Total Harmonic Distortion	THD	1	$V_{in} = 60\text{dB}\mu\text{V}$ EMF	—	1.0	—	%		
Pin ⑫ Output Resistance		R_{12}	1	FM Mode	—	1.5	—	$\text{k}\Omega$		
				AM Mode	—	10	—			
MPX	Input Resistance		R_{IN}	1	—	33	—	$\text{k}\Omega$		
	Output Resistance		R_{OUT}	1	—	5	—			
	Max. Composite Signal Input Voltage		V_{in} MAX (Stereo)	1	L + R = 90%, P = 10% THD = 3%, SW→LPF : ON	—	800	—	mV_{rms}	
	Separator		Sep	1	L + R = 180 mV_{rms} P = 20 mV_{rms} SW→LPF : ON	$f_m = 100\text{Hz}$	—	43	—	dB
						$f_m = 1\text{kHz}$	35	43	—	
						$f_m = 10\text{kHz}$	—	43	—	
	Total Harmonic Distortion	Monaural	THD (Monaural)	1	$V_{in} = 200\text{mV}_{\text{rms}}$ (Mono)	—	0.2	—	%	
		Stereo	THD (Stereo)			L + R = 180 mV_{rms} P = 20 mV_{rms} SW→LPF : ON	—	0.2		—
Voltage Gain		G_V (MPX)	1	$V_{in} = 200\text{mV}_{\text{rms}}$ (Mono)	-2	0	2	dB		
Channel Balance		C.B.	1	$V_{in} = 200\text{mV}_{\text{rms}}$ (Mono)	-2	0	2	dB		

CHARACTERISTIC			SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
MPX	Stereo LED Sensitivity	ON	V_L (ON)	1	Pilot input	—	10	16	mV_{rms}
		OFF	V_L (OFF)			2	6	—	
	Stereo LED Hysteresis		V_H	1	To LED turn off from LED turn on	—	4	—	mV_{rms}
	Capture Range		C.R.	1	$P = 20mV_{rms}$	—	± 4	—	%
Signal To Noise Ratio		S/N	1	$V_{in} = 200mV_{rms}$ (Mono)	—	78	—	dB	

TEST CIRCUIT



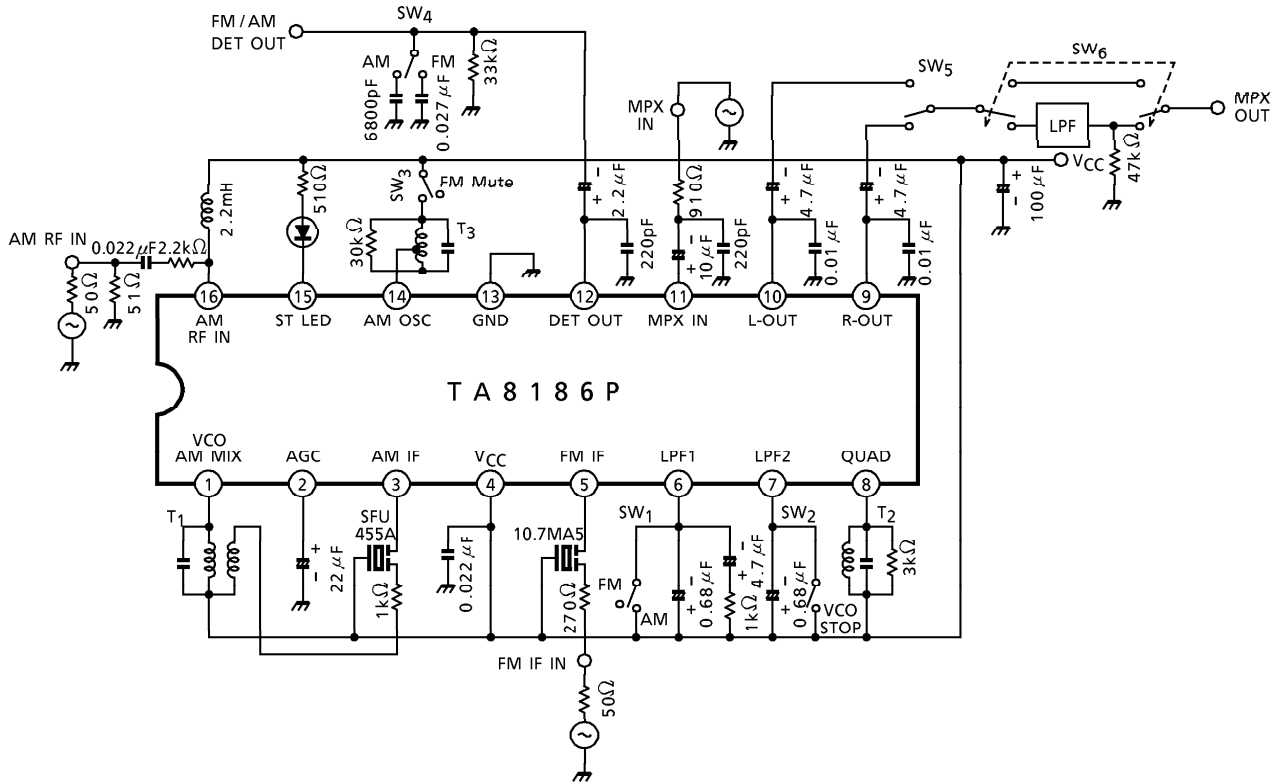


COIL DATA

COIL No.	f	L (μ H)	C ₀ (pF)	Q ₀	TURN				WIRE (mm ϕ)	REF
					1-2	2-3	1-3	4-6		
T ₁ AM IFT	455kHz	—	180	120	—	—	180	15	0.06 UEW	Ⓢ2150-2162-165
		—	180	50 \uparrow	—	—	158	14	0.07 ϕ 2 UEW	ⓉA7LCS-11432X
T ₂ FM DET	10.7MHz	—	82	110	—	—	13	—	0.12 UEW	Ⓢ4152-4095-015
		—	82	80 \uparrow	—	—	11	—	0.1 ϕ 2 UEW	ⓉA119ACS-19118Z
T ₃ AM OSC	796kHz	288	—	115	13	73	—	—	0.08 UEW	Ⓢ4147-1356-038
		288	—	105 \uparrow	16	88	—	—	0.07 ϕ 2 UEW	Ⓣ7TRS-11433Y


Ⓢ : SUMIDA ELECTRIC Co., Ltd.

Ⓣ : TOKO Co., Ltd.



OUTLINE DRAWING
DIP16-P-300A

Unit : mm

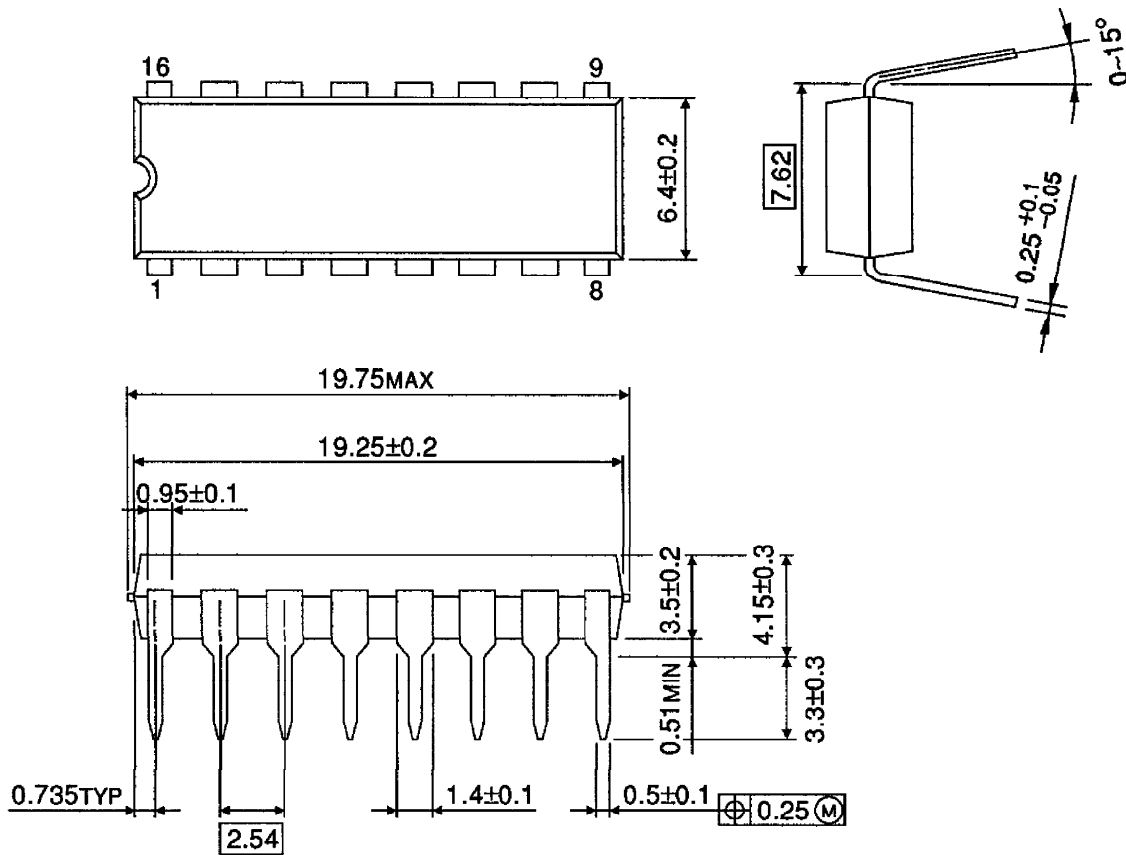

Weight : 1.00g (Typ.)

TA8186P - 8*
1996 - 4 - 22
TOSHIBA CORPORATION