

DESCRIPTION


The 8T04 consists of the necessary logic to decode a 4-bit BCD code to seven segment (0 through 9) readout, as well as some selected signs and letters.

Incorporated in this device is a blanking circuit which turns all segments off when activated. The blanking circuit allows suppression of all numerically insignificant zeros, thereby presenting an easily read display.

Also included is the necessary circuitry to implement suppression of leading and/or trailing zeros. A Lamp Test control is provided to turn all segments on. The Lamp Test allows the viewer to check the validity of the display lamps.

High performance bare collector output transistors are used in the 8T04 for directly driving incandescent lamps or common anode LED displays.

LOGIC DIAGRAM

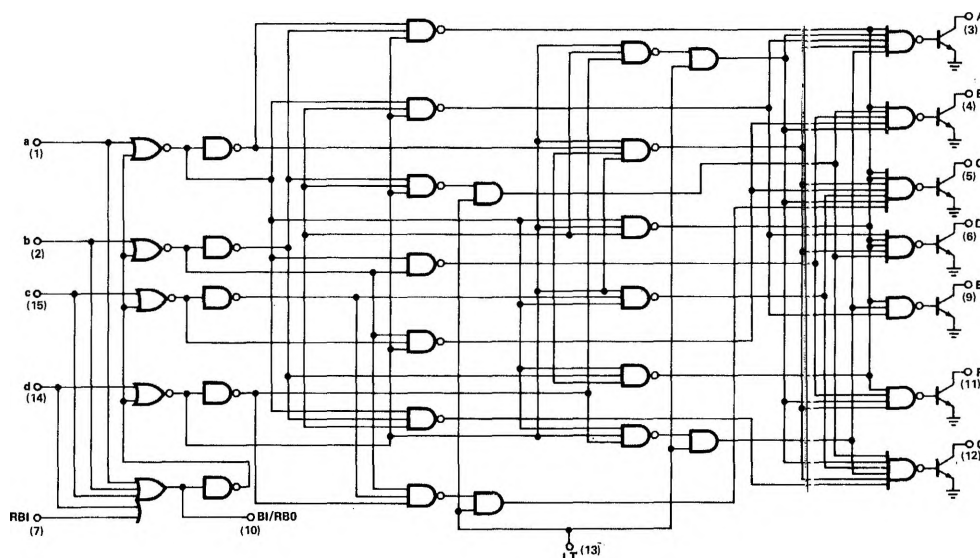


V_{CC} = (16)
GND = (8)
() = Denotes Pin Numbers

ELECTRICAL CHARACTERISTICS (Over Recommended Operating Temperature And Voltage)


CHARACTERISTICS	LIMITS				TEST CONDITIONS					NOTES
	MIN.	TYP.	MAX.	UNITS	LT	RB1	RB0 B1	DRIVEN INPUTS	OUTPUTS	
"1" Output Voltage RBO	3.1			V			-160μA			7, 9
"0" Output Voltage RBO			0.4	V		0.8V	4.8mA	0.8V		8, 9
A-G			0.50	V	0.4V	0.4V	0.4V		40mA	8, 9
"1" Output Leakage Current (A-G)			100	μA		0.8V			6.0V	9, 10
"1" Input Current RBI			40	μA		4.5V				
LT			160	μA	4.5V					
All Other Inputs			80	μA		4.5V	4.5V	4.5V		
"0" Input Current RBI						0.4V				
BI	-1		-1.2	mA			0.4V			
LT	-1		-2.2	mA	0.4V					
All Other Inputs	-1		-10	mA	0.4V					
Input Voltage Rating	5.5			V			10mA	0.4V		11
Power/Current Consumption:										
"S" Temperature Range			394/75	mW/mA						11
"N" Temperature Range			446/85	mW/mA						11

- NOTES:
1. All voltage measurements are referenced to the ground terminal. Terminals not specifically referenced are left electrically open.
2. All measurements are taken with ground pin tied to zero volts.
3. Positive current is defined as into the terminal referenced.
4. Positive NAND Logic Definition:
"UP" Level = "1", "DOWN" = "0".
5. Precautionary measures should be taken to ensure current limiting in accordance with Absolute Maximum Ratings should the isolation diodes become forward biased.
6. Measurements apply to each gate element independently.
7. Output source current is supplied through a resistor to ground.
8. Output sink current is supplied through a resistor to V_{CC}.
9. See truth table: "1" Threshold = 2.0V for a,b,c,d.
"0" Threshold = 0.8V for a,b,c,d.
10. Connect an external 1k ±1% resistor to the output for this test.
11. V_{CC} = 5.25V.

TEST FIGURE FOR "0" OUTPUT VOLTAGE

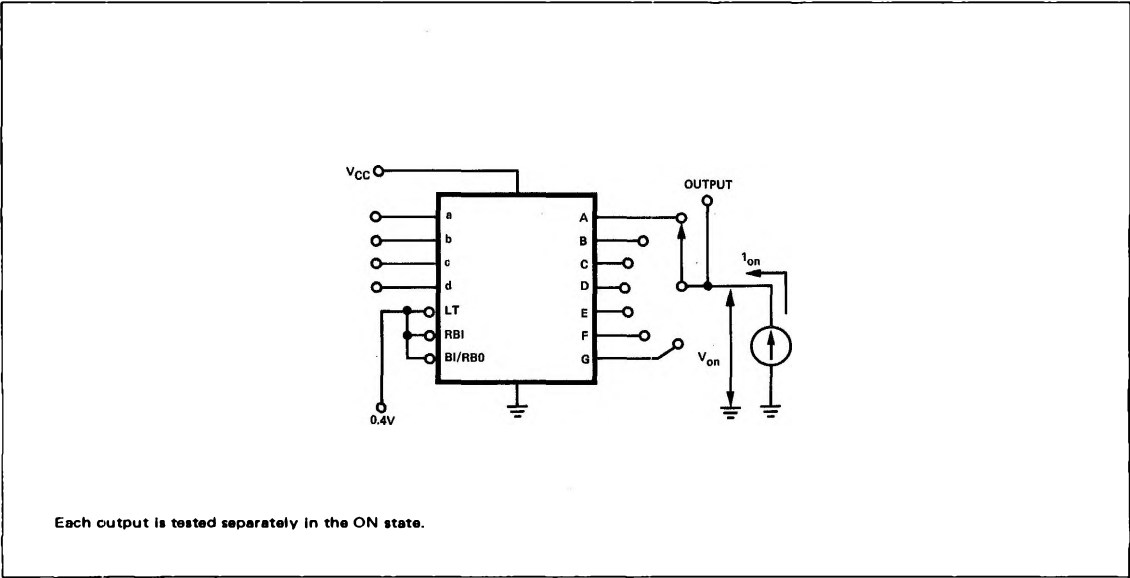

SCHEMATIC DIAGRAM

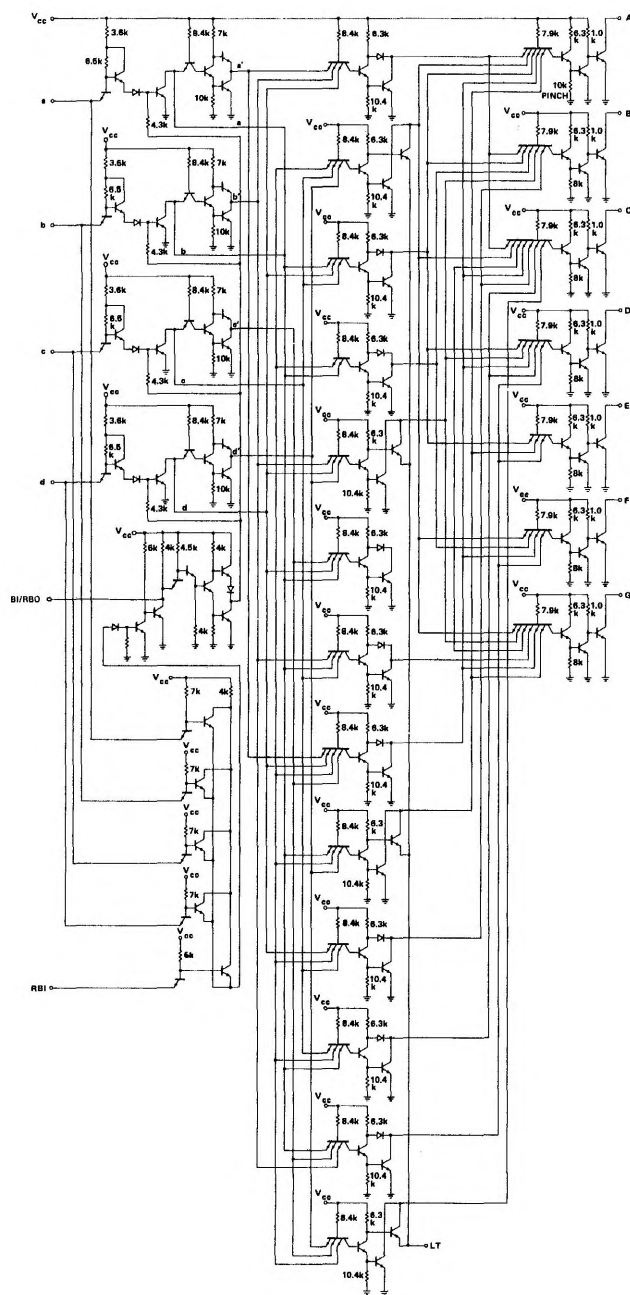

TRUTH TABLE

INPUTS						BI/RBO	OUTPUTS							
INPUT CODE				LAMP TEST	RBI		OUTPUT STATE							
d	c	b	a	LT		NOTE	A	B	C	D	E	F	G	
X	X	X	X	0	X	X	0	0	0	0	0	0	0	8
X	X	X	X	1	X	0 (Note 1 & 2)	1	1	1	1	1	1	1	BLK
0	0	0	0	1	0	0 (Note 2)	1	1	1	1	1	1	1	BLK
0	0	0	0	1	1	1	0	0	0	0	0	0	1	0
0	0	0	1	1	X	1	1	0	0	1	1	1	1	1
0	0	1	0	1	X	1	0	0	1	0	0	1	0	2
0	0	1	1	1	X	1	0	0	0	0	1	1	0	3
0	1	0	0	1	X	1	1	0	0	1	1	0	0	4
0	1	0	1	1	X	1	0	1	0	0	1	0	0	5
0	1	1	0	1	X	1	1	1	0	0	0	0	0	6
0	1	1	1	1	X	1	0	0	0	1	1	1	1	7
1	0	0	0	1	X	1	0	0	0	0	0	0	0	8
1	0	0	1	1	X	1	0	0	0	1	1	0	0	9
1	0	1	0	1	X	1	1	1	1	1	1	1	0	1
1	0	1	1	1	X	1	1	1	1	1	1	1	1	BLK
1	1	0	0	1	X	1	0	0	0	1	0	0	0	0
1	1	0	1	1	X	1	1	1	0	1	1	1	1	1
1	1	1	0	1	X	1	1	1	1	0	0	0	1	1
1	1	1	1	1	X	1	1	1	1	1	1	1	1	BLK

*COMMA

X = Don't care, either "1" or "0".

BI/RBO is an internally wired OR output.

NOTE:

1. BI/RBO used as input.
2. BI/RBO should not be forced high when a,b,c,d, RBI terminals are low, or damage may occur to the unit.

