

FSA6157 Low- R_{ON} SPDT (0.8Ω) Negative-Swing Audio or Video Switch

Features

- 0.8Ω Typical On Resistance (R_{ON}) for +2.7V Supply
- 0.45Ω Maximum R_{ON} Flatness for +2.7V Supply
- -3db Bandwidth: > 50MHz
- Low I_{CCT} Current Over an Expanded Control Input Range
- Packaged in Pb-free 6-Lead MicroPak™ (1.0 x 1.4mm)
- Power-Off Protection on All I/O Ports
- Broad V_{CC} Operating Range: 1.65 to 4.3V
- HBM JEDEC: JESD22-A114
 - I/O to GND: 12kV
- Power to GND: 16kV

Applications

- Cell Phone, PDA, Digital Camera, and Notebook
- LCD Monitor, TV, and Set-top Box

Ordering Information

| Part Number | Top Mark | Eco Status | Package Description |
|-------------|----------|------------|---|
| FSA6157L6X | GT | Green | 6-Lead, MicroPak™, 1.0mm wide, JEDEC MO-255 |

 For Fairchild's definition of Eco Status, please visit: http://www.fairchildsemi.com/company/green/rohs_green.html.

Analog Symbol

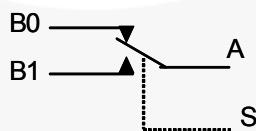


Figure 1. FSA6157

Pin Assignments

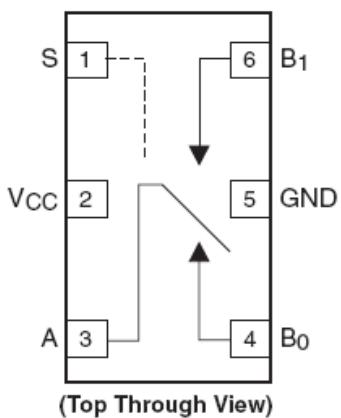


Figure 2. Pin Assignments for 6-Lead MicroPak™

Pin Descriptions

| Name | Description |
|------------------------------------|-------------------|
| A, B ₀ , B ₁ | Data Ports |
| S | Switch Select Pin |

Truth Table

| Control Input, S | Function |
|------------------|-------------------------------|
| LOW | B ₀ connected to A |
| HIGH | B ₁ connected to A |

Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

| Symbol | Parameter | | Min. | Max. | Units |
|---------------------|---|----------------|------------------------|------|-------|
| V _{CC} | Supply Voltage | | -0.5 | 4.6 | V |
| V _{SW} | Switch I/O Voltage ⁽¹⁾ | B0, B1, A Pins | V _{CC} – 5.5V | 4.6 | V |
| V _{SW-SW} | Switch I/O to Switch I/O Voltage Delta (Off State) ⁽¹⁾ | B0, B1, A Pins | | 5.5 | V |
| V _{CNTRL} | Control Input Voltage ⁽¹⁾ | S | -0.5 | 4.6 | V |
| I _{IK} | Input Clamp Diode Current | | | -50 | mA |
| I _{SW} | Switch I/O Current (Continuous) | | | 350 | mA |
| I _{SWPEAK} | Peak Switch Current (Pulsed at 1ms Duration, <10% Duty Cycle) | | | 500 | mA |
| T _{STG} | Storage Temperature Range | | -65 | +150 | °C |
| T _J | Maximum Junction Temperature | | | +150 | °C |
| T _L | Lead Temperature (Soldering, 10 seconds) | | | +260 | °C |
| ESD | Human Body Model (JEDEC: JESD22-A114) | I/O to GND | | 12 | kV |
| | | Power to GND | | 16 | |
| | | All Other Pins | | 8 | |
| | Charge Device Model (JEDEC: JESD22-C101) | | | 2 | |

Note:

1. Input and output negative ratings may be exceeded if input and output diode current ratings are observed.

Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. Fairchild does not recommend exceeding them or designing to absolute maximum ratings.

| Symbol | Parameter | Min. | Max. | Units |
|-----------------------------------|--|------------------------|-----------------|-------|
| V _{CC} | Supply Voltage | 1.65 | 4.3 | V |
| V _{CNTRL} ⁽²⁾ | Control Input Voltage – Select Pin | 0 | V _{CC} | V |
| V _{SW} | Switch I/O Voltage | V _{CC} – 4.3V | 4.3 | V |
| V _{SW-SW} | Switch I/O Voltage to Switch I/O Voltage (Off-State) | | 4.6 | V |
| T _A | Operating Temperature | -40 | 85 | °C |

Note:

2. Input and output negative ratings may be exceeded if input and output diode current ratings are observed.

DC Electrical Characteristics

All typical values are at 25°C unless otherwise specified.

| Symbol | Parameter | Conditions | V _{CC} (V) | T _A =+25°C | | | T _A =-40 to +85°C | | Unit |
|---|--|--|-----------------------|-----------------------|-------|-----------------|------------------------------|-------|------|
| | | | | Min. | Typ. | Max. | Min. | Max. | |
| | Analog Signal Range | | V _{CC} —4.3V | | | V _{CC} | | | V |
| V _{IK} | Clamp Diode Voltage | | 3.00 | | | | | -1.2 | V |
| V _{IH} | Input Voltage High | | 3.60 to 4.30 | | | | 1.4 | | V |
| | | | 2.70 to 3.60 | | | | 1.3 | | |
| | | | 2.30 to 2.70 | | | | 1.3 | | |
| | | | 1.65 to 1.95 | | | | 0.9 | | |
| V _{IL} | Input Voltage Low | | 3.60 to 4.30 | | | | | 0.7 | V |
| | | | 2.70 to 3.60 | | | | | 0.4 | |
| | | | 2.30 to 2.70 | | | | | 0.4 | |
| | | | 1.65 to 1.95 | | | | | 0.4 | |
| I _{IN} | Control Input Leakage (S) | V _{IN} =0 to V _{CC} | 4.30 | | | | -1 | 1 | μA |
| I _{NO(OFF)} , I _{NC(OFF)} | Off Leakage Current of Port B0 and B1 | A=0.5V, V _{CC} —0.5V B0 or B1=V _{CC} —0.5V, 0.5V, or Floating; Figure 4 | 1.95 to 4.30 | -100 | | 100 | -500 | 500 | nA |
| I _{A(ON)} | On Leakage Current of Port A | A=0.5V, V _{CC} —0.5V B0 or B1=V _{CC} —0.5V, 0.5V, or Floating; Figure 5 | 4.30 | -100 | | 100 | -250 | 250 | nA |
| I _{OFF} | Power-Off Leakage Current (All I/O Ports) | V _{A,BN} =0.3V to 4.3V or Floating, | 0V or Floating | | | | -40 | 40 | μA |
| R _{ON} | Switch On Resistance ^(3,6) | I _{ON} =100mA, B0 or B1=0, 0.7V, 3.6V, 4.3V; Figure 3 | 4.30 | | 0.4 | | | 0.8 | Ω |
| | | I _{ON} =100mA, B0 or B1=0, 0.7V, 2.0V, 2.7V; Figure 3 | 2.70 | | 0.8 | | | 1.0 | |
| | | I _{ON} =100mA, B0 or B1=0, 0.7V, 1.6V, 2.3V; Figure 3 | 2.30 | | | | | 1.5 | |
| | | I _{ON} =100mA, B0 or B1=0, 0.7V, 1.65V; Figure 3 | 1.65 | | 1.3 | | | 2.0 | |
| ΔR _{ON} | On Resistance Matching Between Channels ⁽⁴⁾ | I _{ON} =100mA, B0 or B1=0.7V | 2.30 to 4.30 | | 0.050 | | | 0.130 | Ω |
| R _{FLAT(ON)} | On Resistance Flatness ⁽⁵⁾ | I _{OUT} =100mA, B0 or B1=0V to V _{CC} | 2.70 to 4.30 | | | | | 0.45 | Ω |
| I _{CC} | Quiescent Supply Current | V _{SW} =0 or V _{CC} , I _{OUT} =0 | 4.30 | -100 | | 100 | -500 | 500 | nA |
| I _{CCT} | Increase in I _{CC} per Input | Input at 2.6V | 4.30 | | 3.0 | | | 10.0 | μA |
| | | Input at 1.8V | | | 7.0 | | | | |

Notes:

3. On resistance is determined by the voltage drop between A and B pins at the indicated current through the switch.
4. $\Delta R_{ON} = R_{ON\ max} - R_{ON\ min}$ measured at identical V_{CC}, temperature, and voltage.
5. Flatness is defined as the difference between the maximum and minimum value of on resistance (R_{ON}) over the specified range of conditions.
6. Guaranteed by characterization, not production tested.

AC Electrical Characteristics

All typical value are for V_{CC}=1.8V, 2.5V, 3.3V, and 4.0V at 25°C unless otherwise specified.

| Symbol | Parameter | Conditions | V _{CC} (V) | T _A =+25°C | | | T _A =-40 to +85°C | | Unit | Figure |
|------------------|---------------------------|---|---------------------|-----------------------|------|------|------------------------------|------|------|----------------------|
| | | | | Min. | Typ. | Max. | Min. | Max. | | |
| t _{ON} | Turn-On Time | B0 or B1=1.0V, R _L =50Ω, C _L =35pF | 3.60 to 4.30 | 5 | | 65 | 3 | 70 | ns | Figure 6 Figure 7 |
| | | | 2.70 to 3.60 | 5 | | 65 | 3 | 70 | | |
| | | | 2.30 to 2.70 | 5 | | 70 | 3 | 80 | | |
| | | | 1.65 to 1.95 | 10 | | 100 | 10 | 150 | | |
| t _{OFF} | Turn-Off Time | B0 or B1=1.0V, R _L =50Ω, C _L =35pF | 3.60 to 4.30 | 1 | | 35 | 1 | 45 | ns | |
| | | | 2.70 to 3.60 | 1 | | 35 | 1 | 45 | | |
| | | | 2.30 to 2.70 | 2 | | 45 | 2 | 50 | | |
| | | | 1.65 to 1.95 | 2 | | 70 | 2 | 95 | | |
| t _{BBM} | Break-Before-Make Time | B0 or B1=1.0V, R _L =50Ω, C _L =35pF | 3.60 to 4.30 | | | | 2 | | ns | Figure 8 |
| | | | 2.70 to 3.60 | | | | 2 | | | |
| | | | 2.30 to 2.70 | | | | 2 | | | |
| | | | 1.65 to 1.95 | | | | 2 | | | |
| Q | Charge Injection | C _L =1.0nF, V _S =0V, R _S =0Ω | 3.60 to 4.30 | | 25 | | | | pC | Figure 12 |
| | | | 2.70 to 3.60 | | 15 | | | | | |
| | | | 2.30 to 2.70 | | 12 | | | | | |
| | | | 1.65 to 1.95 | | 5 | | | | | |
| OIRR | Off Isolation | f=20kHz, R _L =50Ω, C _L =0pF | 1.65 to 4.30 | | -60 | | | | dB | Figure 10 |
| Xtalk | Crosstalk | f=20kHz, R _L =50Ω, C _L =0pF | 1.65 to 4.30 | | -60 | | | | dB | Figure 11 |
| BW | -3db Bandwidth | R _L =50Ω, C _L =0pF | 1.65 to 4.30 | | >50 | | | | MHz | Figure 9 |
| THD | Total Harmonic Distortion | f=20Hz to 20kHz, R _L =32Ω, V _{IN} =2V _{PP} | 1.65 to 4.30 | | 0.1 | | | | % | Figure 15 |
| SNR | Signal to Noise Ratio | f=1kHz, R _L =32Ω, V _{IN} =0dBmW, V _{BIA} =0V | 4.30 | | -70 | | | | dB | |

Capacitance

| Symbol | Parameter | Conditions | V _{CC} (V) | T _A =+25°C | | | Unit | Figure |
|------------------|-------------------------------|------------|---------------------|-----------------------|------|------|------|-----------|
| | | | | Min. | Typ. | Max. | | |
| C _{IN} | Control Pin Input Capacitance | f=1MHz | 0 | | 3 | | pF | Figure 13 |
| C _{OFF} | B Port Off Capacitance | f=1MHz | 3.30 | | | 30 | pF | Figure 13 |
| C _{ON} | A Port On Capacitance | f=1MHz | 3.30 | | | 150 | pF | Figure 14 |

Test Diagrams

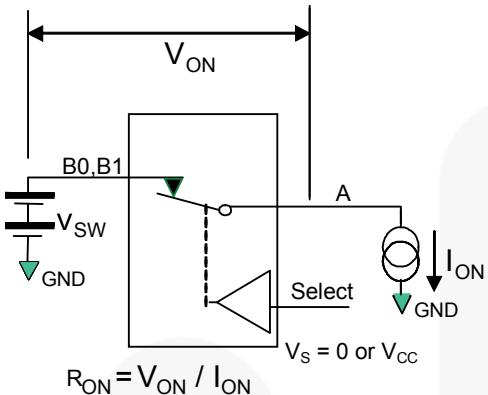


Figure 3. On Resistance

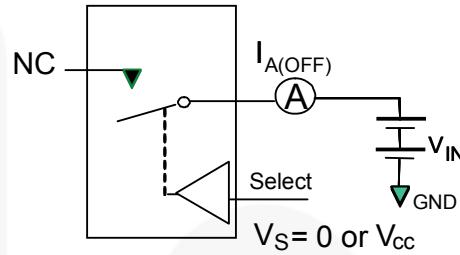


Figure 4. Off Leakage (Ports Tested Separately)

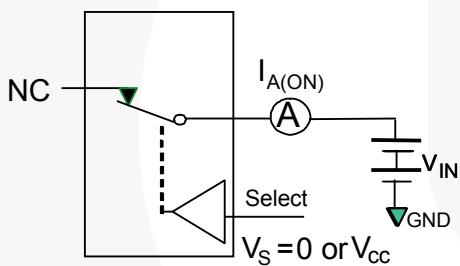


Figure 5. On Leakage

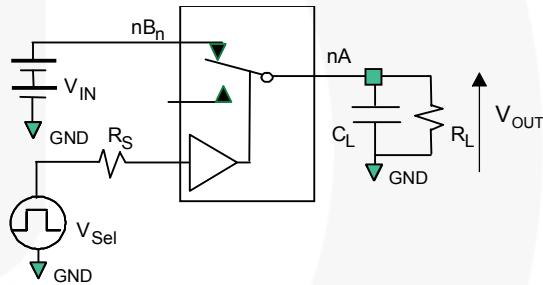


Figure 6. Test Circuit Load

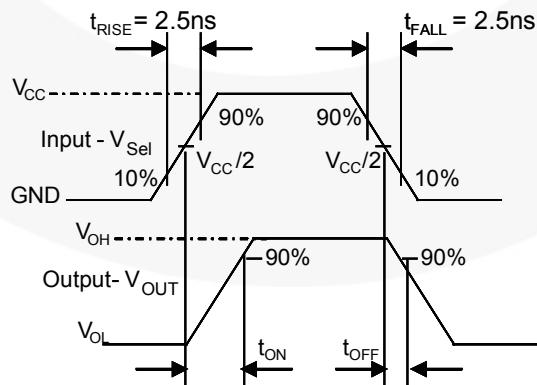


Figure 7. Turn-On / Turn-Off Waveforms

Test Diagrams (Continued)

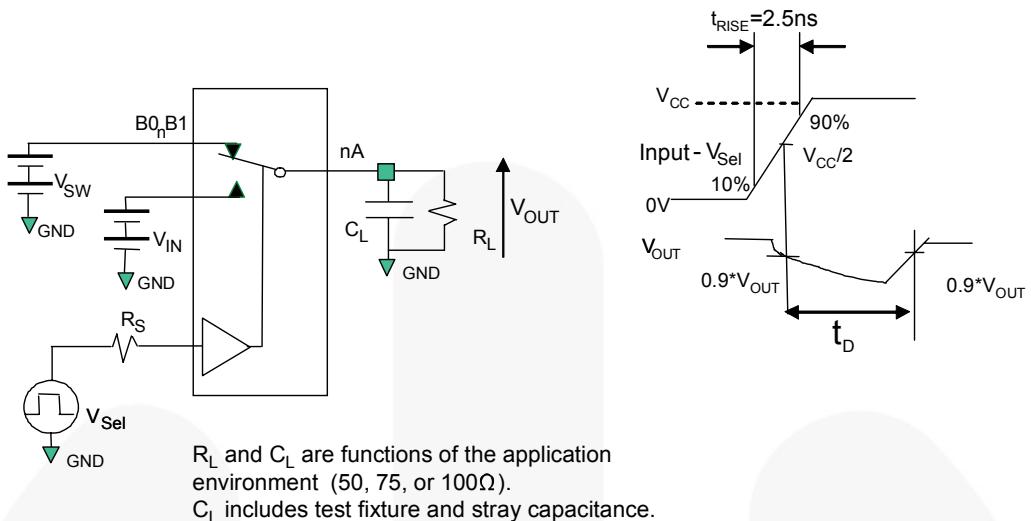


Figure 8. Break-Before-Make Interval Timing

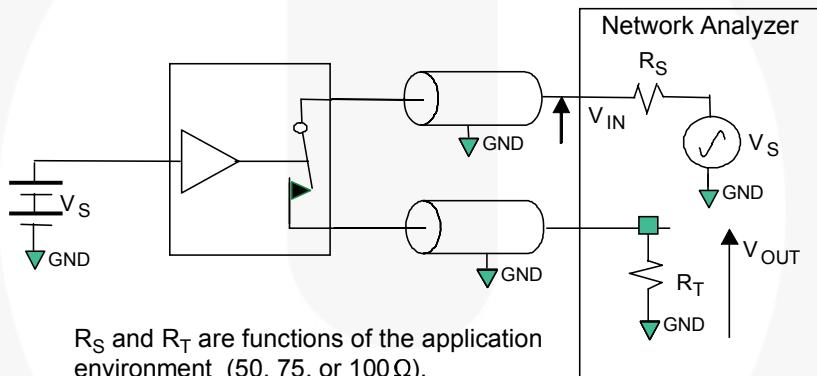


Figure 9. Bandwidth


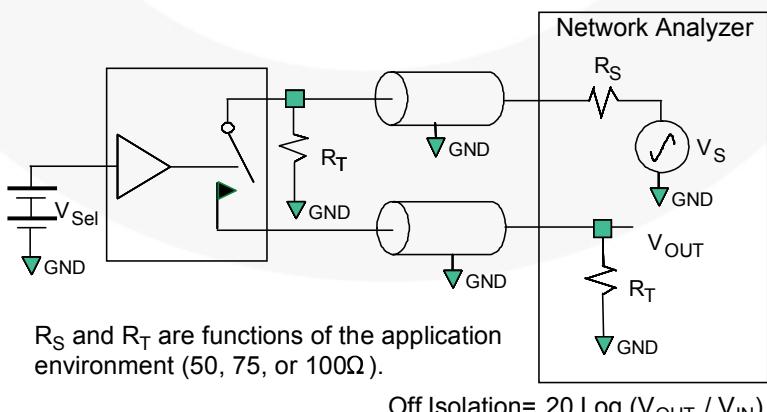


Figure 10. Channel Off Isolation

Test Diagrams (Continued)

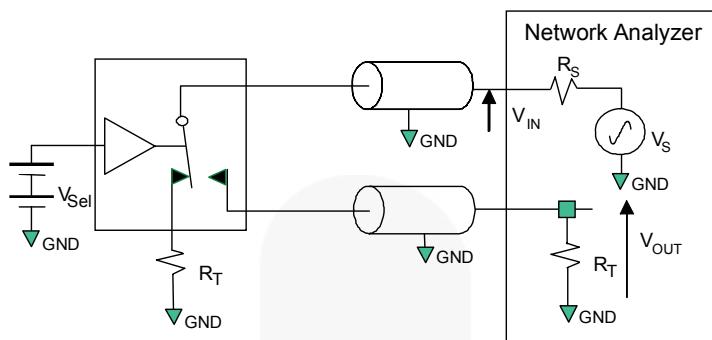

R_S and R_T are functions of the application environment (50, 75, or 100Ω).

$$\text{Crosstalk} = 20 \log (V_{\text{OUT}} / V_{\text{IN}})$$

Figure 11. Adjacent Channel Crosstalk

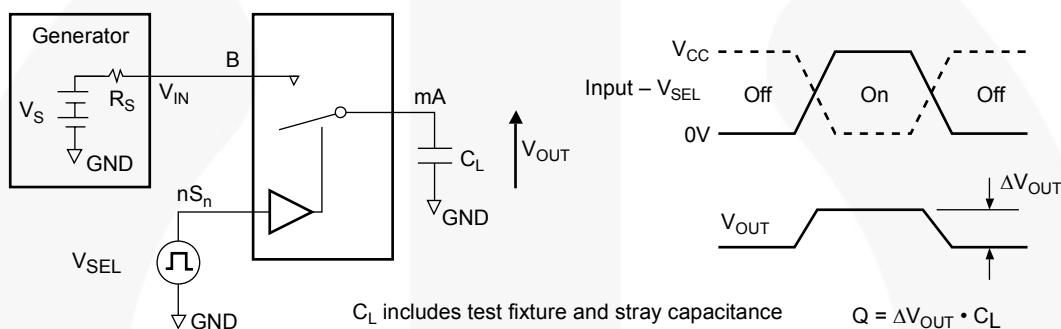


Figure 12. Charge Injection Test

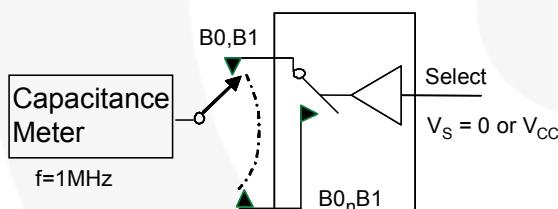


Figure 13. Channel Off Capacitance


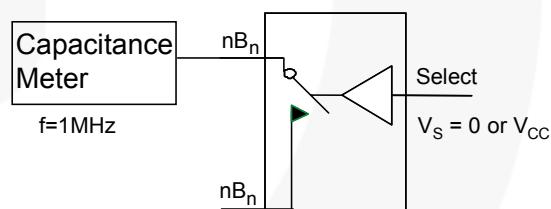



Figure 14. Channel On Capacitance

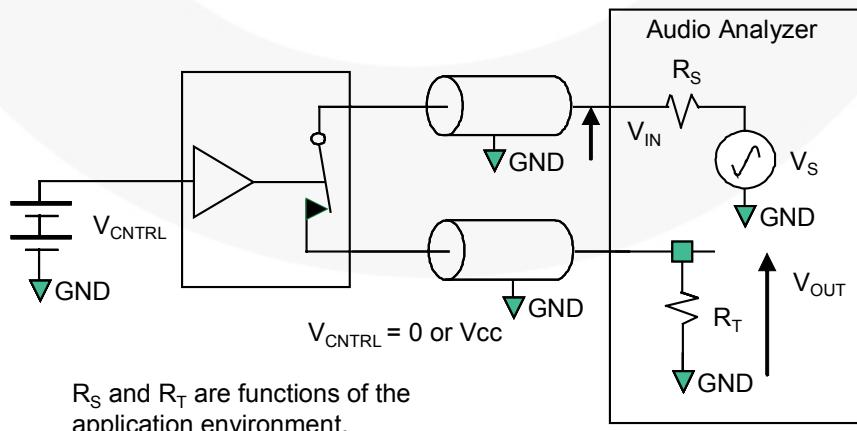

R_S and R_T are functions of the application environment.

Figure 15. Total Harmonic Distortion

Physical Dimensions

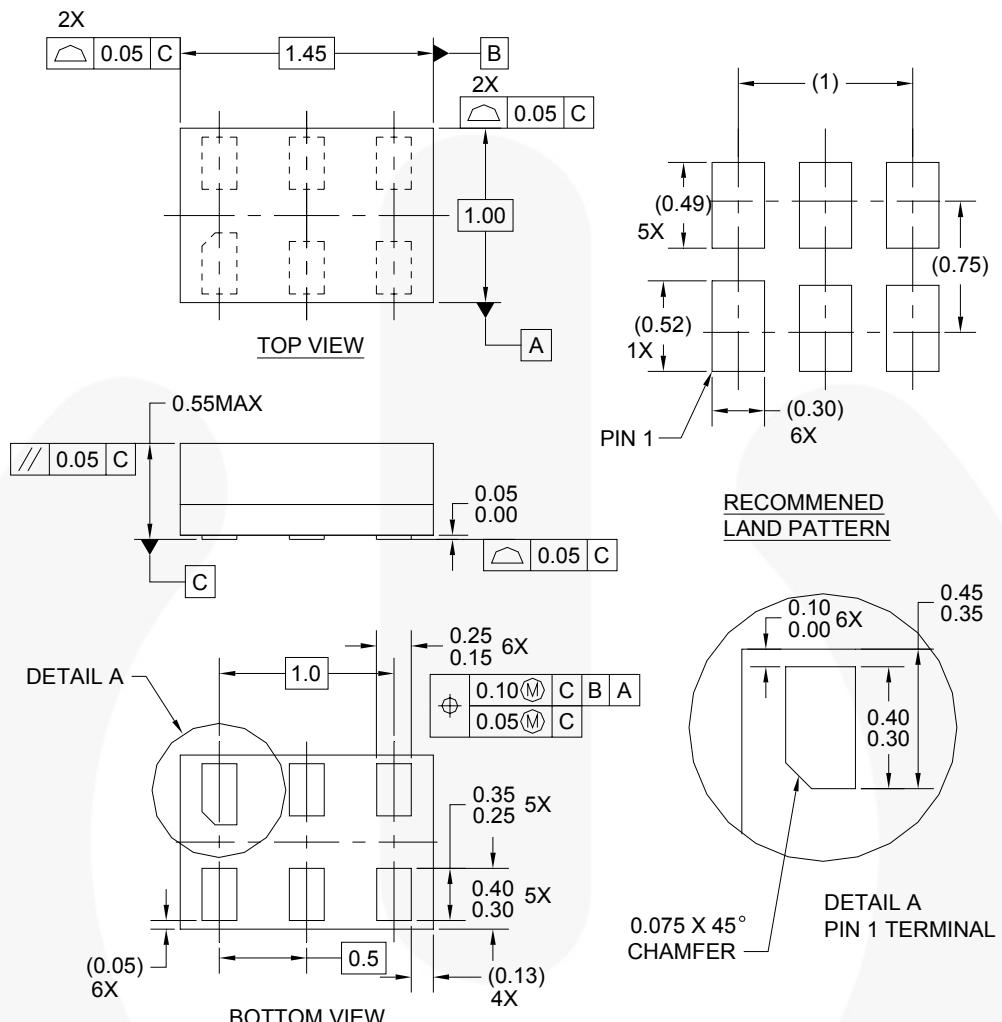

Notes:

1. CONFORMS TO JEDEC STANDARD M0-252 VARIATION UAAD
2. DIMENSIONS ARE IN MILLIMETERS
3. DRAWING CONFORMS TO ASME Y14.5M-1994

MAC06AREVC

Figure 16. 6-Lead MicroPak™, 1.0mm Wide

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:
<http://www.fairchildsemi.com/packaging/>.

For current tape and reel specifications, visit Fairchild Semiconductor's online packaging area:
http://www.fairchildsemi.com/products/logic/pdf/micropak_tr.pdf.



TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

| | | | |
|--------------------------|------------------------|-------------------------------------|----------------------|
| AccuPower™ | FPSTM | PowerTrench® | The Power Franchise® |
| Auto-SPM™ | F-PFSTM | PowerXSTM | the power franchise |
| Build it Now™ | FRFET® | Programmable Active Droop™ | TinyBoost™ |
| CorePLUS™ | Global Power Resource™ | QFET® | TinyBuck™ |
| CorePOWER™ | Green FPSTM | QSTM | TinyCalc™ |
| CROSSVOLT™ | Green FPSTM e-Series™ | Quiet Series™ | TinyLogic® |
| CTL™ | Gmax™ | RapidConfigure™ | TINYOPTO™ |
| Current Transfer Logic™ | GTO™ | TM | TinyPower™ |
| EcoSPARK® | IntelliMAX™ | Saving our world, 1mW/kW at a time™ | TinyPVM™ |
| EfficientMax™ | ISOPLANAR™ | SignalVise™ | TinyWire™ |
| EZSWITCH™ | MegaBuck™ | SmartMax™ | TriFault Detect™ |
| ™ | MICROCOUPLER™ | SMART START™ | TRUECURRENT™ |
| ® | MicroFET™ | SPM® | µSerDes™ |
| Fairchild® | MicroPak™ | STEALTH™ | ® |
| Fairchild Semiconductor® | MillerDrive™ | SuperFET™ | UHC® |
| FACT Quiet Series™ | MotionMax™ | SuperSOT™3 | Ultra FRFET™ |
| FACT® | Motion-SPM™ | SuperSOT™6 | UniFET™ |
| FAST® | OPTOLOGIC® | SuperSOT™8 | VCXTM |
| FastvCore™ | OPTOPLANAR® | SupreMOS™ | VisualMax™ |
| FETBench™ | PDP SPM™ | SyncFET™ | XSTM |
| FlashWriter®* | Power-SPM™ | Sync-Lock™ | |
| | | | |

* Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.fairchildsemi.com, under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

PRODUCT STATUS DEFINITIONS

Definition of Terms

| Datasheet Identification | Product Status | Definition |
|--------------------------|-----------------------|---|
| Advance Information | Formative / In Design | Datasheet contains the design specifications for product development. Specifications may change in any manner without notice. |
| Preliminary | First Production | Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design. |
| No Identification Needed | Full Production | Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design. |
| Obsolete | Not In Production | Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only. |

Rev. I42