

## MC9S12DB-Family

### *Product Proposal* **16-Bit Microcontroller**

Designed for automotive multiplexing applications, members of the MC9S12DB-Family of 16 bit Flash-based microcontrollers are fully pin compatible and enable users to choose between different memory and peripheral options for scalable designs. All MC9S12DB-Family members are composed of standard on-chip peripherals including a 16-bit central processing unit (CPU12), up to 128K bytes of Flash EEPROM, 8K bytes of RAM, 2K bytes of EEPROM, two asynchronous serial communications interfaces (SCI), up to two serial peripheral interfaces (SPI), an enhanced capture timer (ECT), two 8-channel, 10-bit analog-to-digital converters (ADC), an eight-channel pulse-width modulator (PWM), Byteflight interface and up to two CAN 2.0 A, B software compatible modules (MSCAN12). System resource mapping, clock generation, interrupt control and bus interfacing are managed by the system integration module (SIM). The MC9S12DB-Family has full 16-bit data paths throughout, however, the external bus can operate in an 8-bit narrow mode so single 8-bit wide memory can be interfaced for lower cost systems. The inclusion of a PLL circuit allows power consumption and performance to be adjusted to suit operational requirements. In addition to the I/O ports available in each module, up to 22 I/O ports are available with Wake-Up capability from STOP or WAIT mode.

#### Features

#### NOTE

Not all features listed here are available in all configurations.

- **16-bit CPU12**
  - Upward compatible with M68HC11 instruction set
  - Interrupt stacking and programmer's model identical to M68HC11
  - 20-bit ALU
  - Instruction queue
  - Enhanced indexed addressing
- **Multiplexed bus**
  - Single chip or expanded
  - 16 address/16 data wide or 16 address/8 data narrow modes
  - External address space 1MByte for Data and Program space (112 pin package only)
- **Wake-up interrupt inputs depending on the package option**
  - 8-bit port H
  - 4-bit port J
  - 8-bit port shared with PWM/SPI
- **Memory options**
  - 32K, 128K Byte Flash EEPROM
  - 1K, 2K Byte EEPROM
  - 2K, 8K Byte RAM
- **One or Two Analog-to-Digital Converters**
  - 1 or 2 times 8-channels, 10-bit resolution depending on the package option
  - External conversion trigger capability

This document contains information on a new product. Specifications and information herein are subject to change without notice.



- **Up to two 1M bit per second, CAN 2.0 A, B software compatible modules**
  - Five receive and three transmit buffers
  - Flexible identifier filter programmable as 2 x 32 bit, 4 x 16 bit or 8 x 8 bit
  - Four separate interrupt channels for Rx, Tx, error and wake-up
  - Low-pass filter wake-up function
  - Loop-back for self test operation
- **Enhanced Capture Timer (ECT)**
  - 16-bit main counter with 7-bit prescaler
  - 8 programmable input capture or output compare channels; 4 of the 8 input captures with buffer
  - Input capture filters and buffers, three successive captures on four channels, or two captures on four channels with a capture/compare selectable on the remaining four
  - Four 8-bit or two 16-bit pulse accumulators
  - 16-bit modulus down-counter with 4-bit prescaler
  - Four user-selectable delay counters for signal filtering
- **7 or 8 PWM channels with programmable period and duty cycle,**
  - 8-bit 4-channel or 16-bit 2-channel (80 Pin Version)
  - 8-bit 8-channel or 16-bit 4-channel (112 Pin Version)
  - Separate control for each pulse width and duty cycle
  - Center- or left-aligned outputs
  - Programmable clock select logic with a wide range of frequencies
- **Serial interfaces**
  - Two asynchronous serial communications interfaces (SCI)
  - Up to two synchronous serial peripheral interfaces (SPI)
- **Byteflight**
  - 10MBit/s serial protocol
- **SIM (System Integration Module)**
  - CRG (windowed COP watchdog, real time interrupt, clock monitor, clock generation and reset)
  - MEBI (multiplexed external bus interface)
  - MMC (memory map and interface)
  - INT (interrupt control)
  - BKP (breakpoints)
  - BDM (background debug mode)
- **Clock generation**
  - Phase-locked loop clock frequency multiplier
  - Limp home mode in absence of external clock
  - Slow mode divider
  - Low power 0.5 to 40 MHz crystal oscillator reference clock
- **Operating frequency**
  - 50MHz equivalent to 25MHz Bus Speed for single chip
  - 40MHz equivalent to 20MHz Bus Speed in expanded bus modes
- **Internal 5V to 2.5V Regulator**
- **112-Pin LQFP or 80-Pin QFP package**
  - I/O lines with 5V input and drive capability
  - 5VA/D converter inputs
  - Dual supply - 5V for I/O and A/D, 2.5V logic
- **Development support**
  - Single-wire background debug™ mode (BDM)
  - On-chip hardware breakpoints

**Table 1 List of MC9S12DB-Family members**

Flash	RAM	EEPROM	Package	Device	CAN	ByteFlight	SCI	SPI	A/D	PWM	I/O
128K	8K	2K	112LQFP	MC9S12DB128	2	1	2	2	2/16	8ch	91
			80 QFP		0	1	1	2	1/8	7ch	59
64K	4K	1K	80QFP	MC9S12DB64	0	1	1	1	1/8	7ch	59

• **Pin out explanations:**

— A/D is the number of modules/total number of A/D channels.

— I/O count:

112 Pin Package:

Port A = 8, B = 8, E = 6 + 2 input only, H = 8, J = 4, K = 7, M = 8, P = 8, S = 8, T = 8, PAD = 16 input only.

22 inputs provide Interrupt capability (H = 8, P = 8, J = 4, IRQ, XIRQ)


80 Pin Package:

Port A = 8, B = 8, E = 6 + 2 input only, M = 6, P = 7, S = 6, T = 8, PAD = 8 input only

9 inputs provide Interrupt capability (P = 7, IRQ, XIRQ)


— the MC9S12DB64 features only one SPI, SPI0

— SPI1 pins are shared with PWM3:0 or Port H3:0 routeable under software control

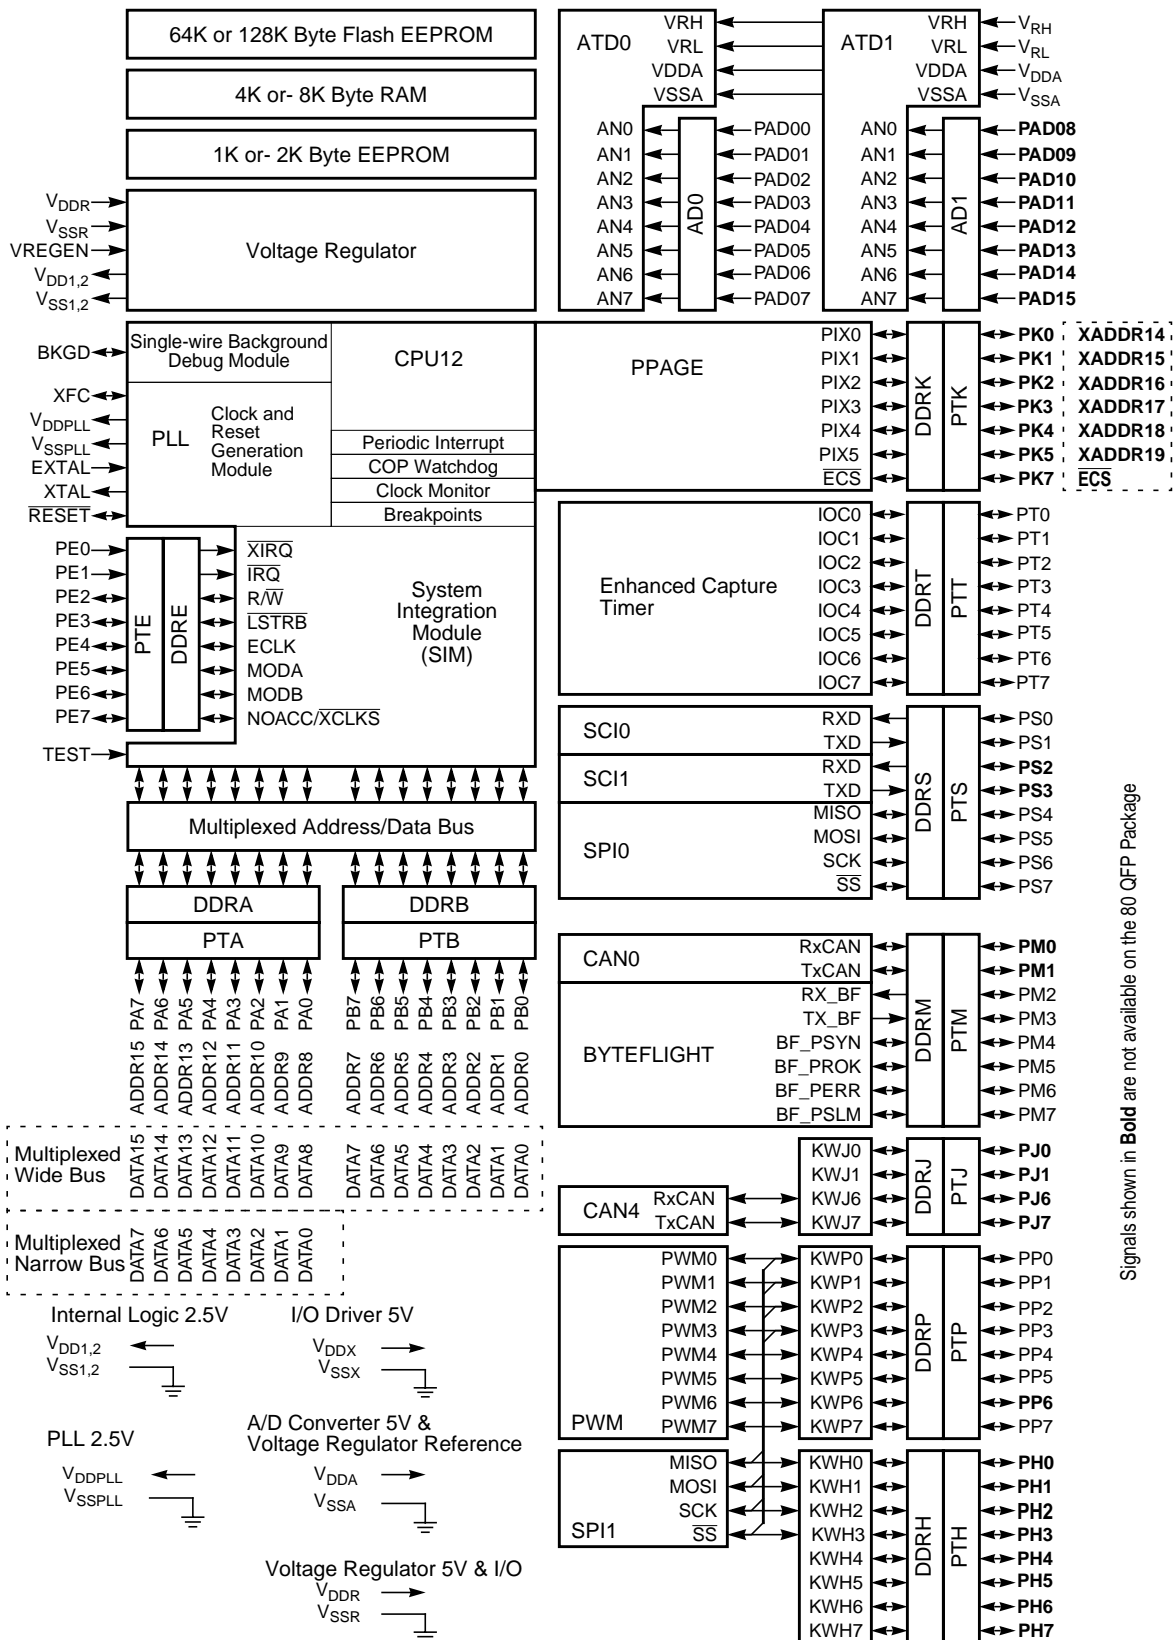

Signals shown in **Bold** are not available on the 80 QFP Package

Figure 1 Pin assignments 112 LQFP for MC9S12DB128

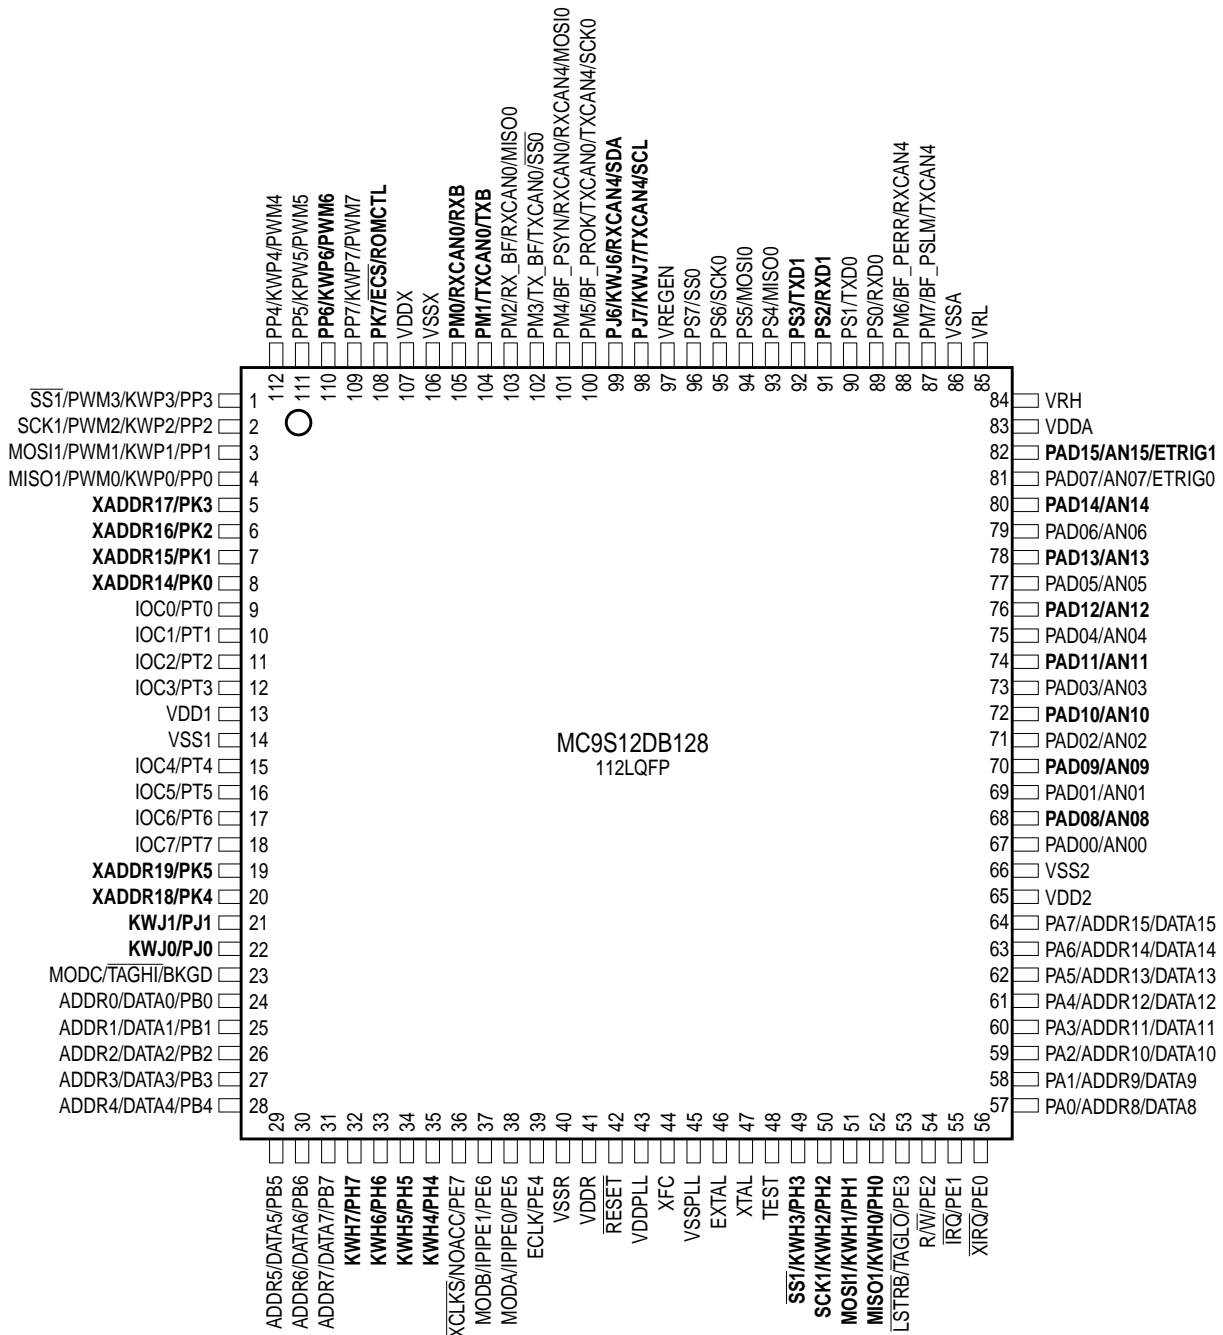

Signals shown in **Bold** are not available on the 80 Pin Package

**Figure 2 Pin Assignments MC9S12DB128 in 80 QFP**



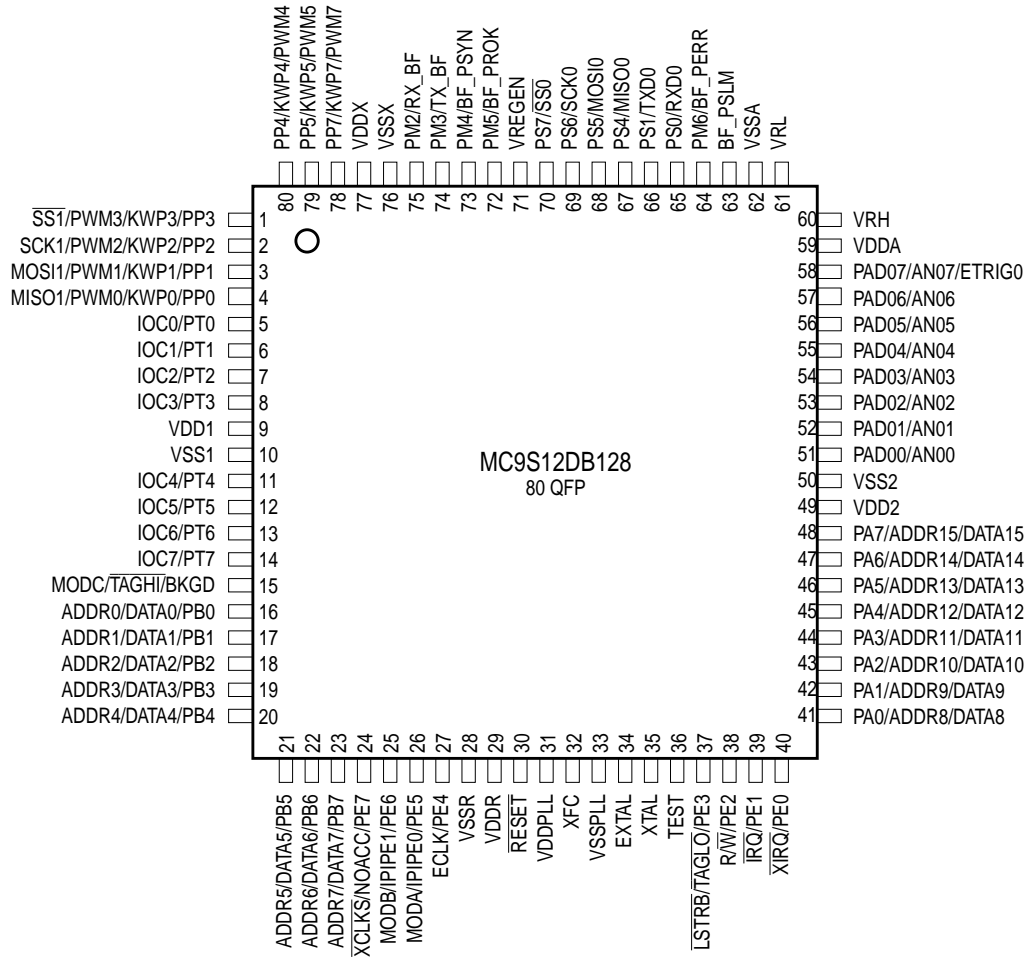


Figure 3 Pin Assignments MC9S12DB64 in 80 QFP




**Figure 4 MC9S12DB128 User Configurable Memory Map**

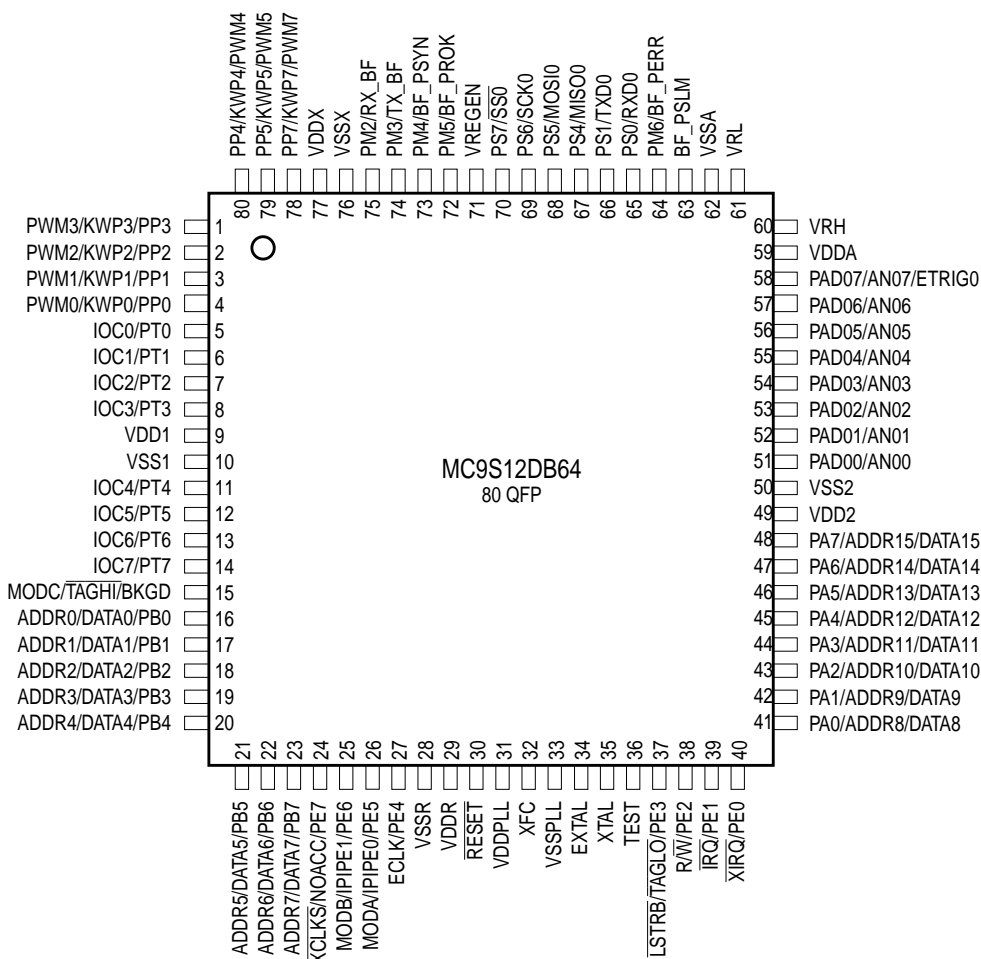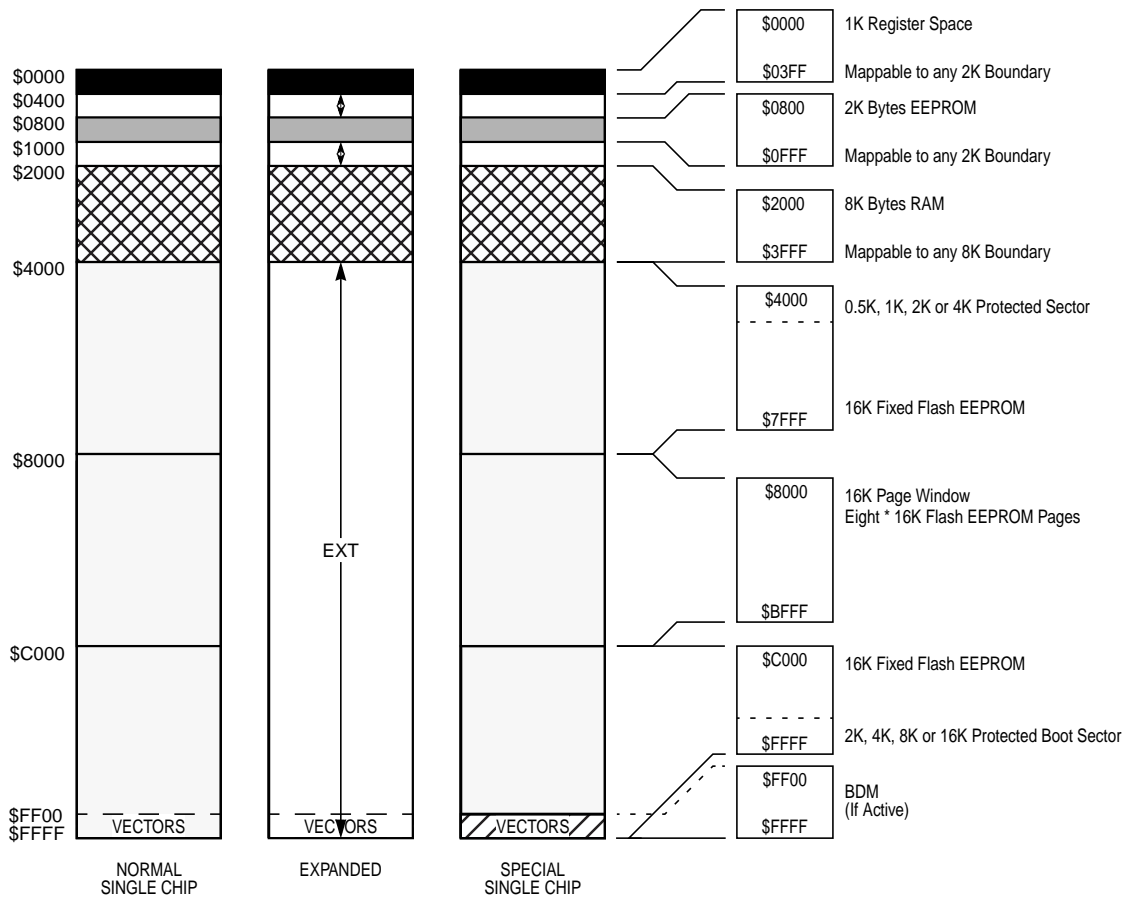

The address does not show the map after reset, but a useful map. After reset the map is:  
 \$0000 - \$03FF: Register Space  
 \$0000 - \$1FFF: 8K RAM  
 \$0000 - \$07FF: 2K EEPROM (not visible)



**Figure 5 MC9S12DB64 User Configurable Memory Map**

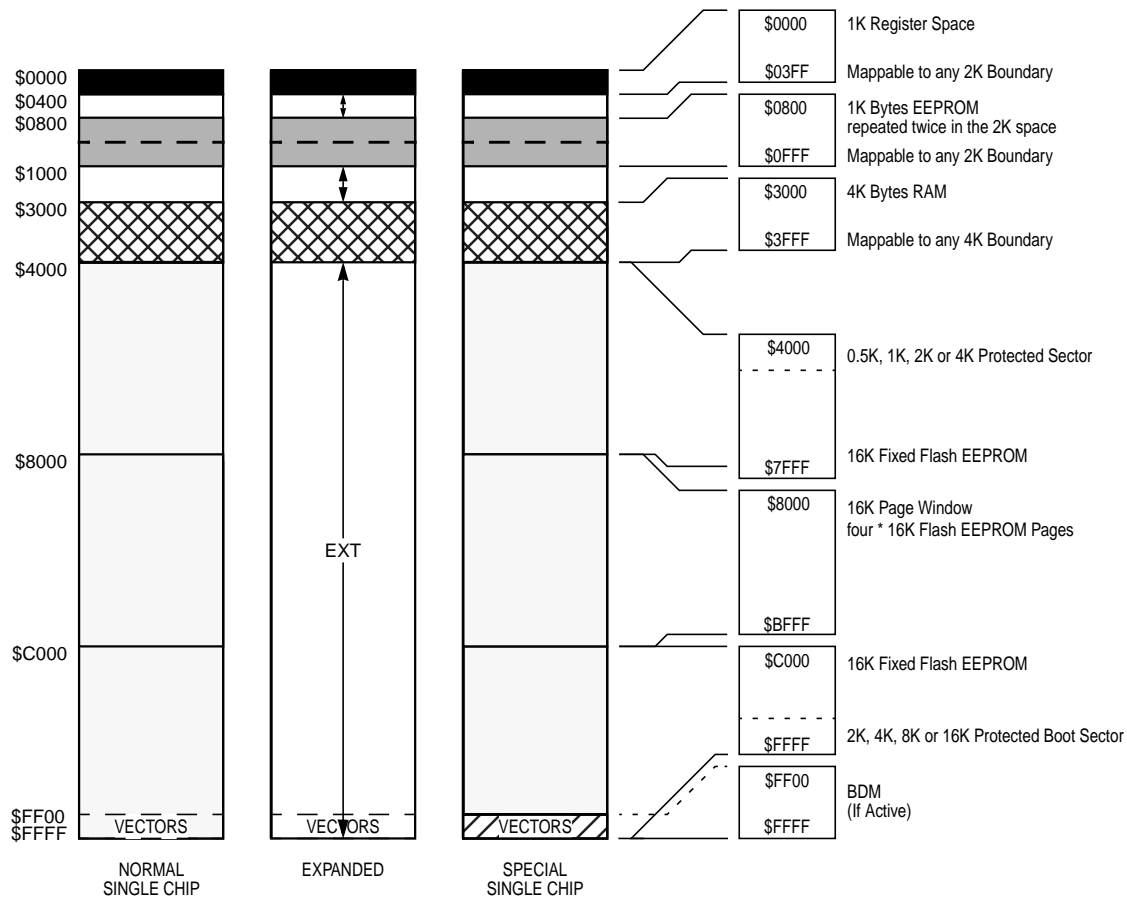

The figure shows a useful map, which is not the map out of reset. After reset the map is:

- \$0000 - \$03FF: Register Space
- \$0000 - \$0FFF: 4K RAM
- \$0000 - \$07FF: 1K EEPROM (not visible)

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and (M) are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

**How to reach us:**

**USA/EUROPE:** Motorola Literature Distribution; P.O. Box 5405, Denver, Colorado 80217. 1-303-675-2140

**HOME PAGE:** <http://mcu.motsp.com/>

**JAPAN:** Motorola Japan Ltd.; SPS, Technical Information Center, 3-20-1, Minami-Azabu, Minato-ku, Tokyo 106-8573 Japan. 81-3-3440-3569

**ASIA/PACIFIC:** Motorola Semiconductors H.K. Ltd.; Silicon Harbour Centre, 2 Dai King Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong. 852-266668334

**CUSTOMER FOCUS CENTER:** 1-800-521-6274

© Motorola, 2002



**MOTOROLA**

