



PRELIMINARY

LM6165/LM6265/LM6365 High Speed Operational Amplifier

General Description


The LM6165 family of high-speed amplifiers exhibits an excellent speed-power product in delivering 300 V per μs and 725 MHz GBW (stable to a gain of +25) with only 5 mA of supply current. Further power savings and application convenience are possible by taking advantage of the wide dynamic range in operating supply voltage which extends all the way down to +5V.

These amplifiers are built with National's new VIPTM (Vertically Integrated PNP) process which produces fast PNP transistors that are true complements to the already fast NPN devices. This advanced junction-isolated process delivers high speed performance without the need for complex and expensive dielectric isolation.


Features

- High slew rate 300 V/ μs
- High GBW product 725 MHz
- Low supply current 5 mA
- Fast settling 80 ns to 0.1%
- Low differential gain <0.1%
- Low differential phase <0.1°
- Wide supply range 4.75V to 32V
- Stable with unlimited capacitive load
- Well behaved; easy to apply

Typical AC Characteristics

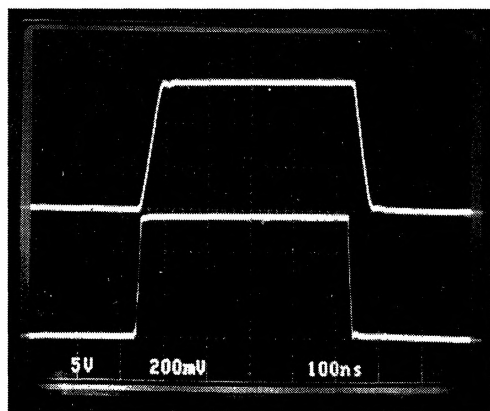Step Response; $A_V = +25$ 

TL/H/9152-1

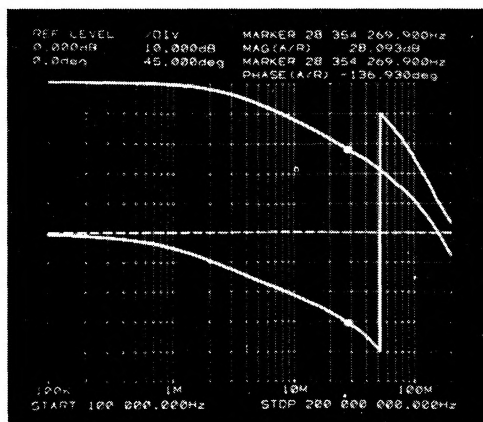Gain & Phase; $A_V = +300$ 

TL/H/9152-2

Absolute Maximum Rating

If Military/Aerospace specified devices are required, contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage ($V^+ - V^-$)	36V
Differential Input Voltage (Note 8)	$\pm 8V$
CM Input Voltage ($V^+ - 0.7V$) To ($V^- - 0.7V$)	
Output Short Circuit to Gnd (Note 1)	Continuous
Lead Temp (Soldering, 10 sec.)	260°C

Storage Temp Range	-65°C to 150°C
Operating Temperature Range (Note 2)	
LM6165	-55°C to +125°C
LM6265	-25°C to +85°C
LM6365	0°C to 70°C
Max Junction Temperature (Note 2)	150°C
ESD Tolerance (Notes 8 & 9)	$\pm 700V$

DC Electrical Characteristics (Note 3)

Parameter	Conditions	Typ	LM6165		LM6265		LM6365		Units
			Tested Limit	Design Limit	Tested Limit	Design Limit	Tested Limit	Design Limit	
			(Note 4)	(Note 5)	(Note 4)	(Note 5)	(Note 4)	(Note 5)	
Input Offset Voltage		1	3 4		3	4	6	7	mV max
Input Offset Voltage Average Drift		3							$\mu V/^\circ C$
Input Bias Current		2.5	3 6		3	5	5	6	μA max
Input Offset Current		150	350 800		350	600	1500	1900	na max
Input Offset Current Average Drift		0.3							nA/ $^\circ C$
Input Resistance	Differential	20							k Ω
Input Capacitance		6.0							pF
Large Signal Voltage Gain	$V_{OUT} = \pm 10V$, $R_L = 2 k\Omega$ (Note 11)	10.5	7.5 5.0		7.5	6.0	5.5	5.0	V/mV min
	$R_L = 10 k\Omega$	38							
Input Common-Mode Voltage Range	Supply = $\pm 15V$	+14.0	+13.9 +13.8		+13.9	+13.8	+13.8	+13.7	V min
		-13.6	-13.4 -13.2		-13.4	-13.2	-13.3	-13.2	V min
	Supply = +5V (Note 6)	4.0	3.9 3.8		3.9	3.8	3.8	3.7	V min
		1.4	1.6 1.8		1.6	1.8	1.7	1.8	V max
Common-Mode Rejection Ratio	$-10V \leq V_{CM} \leq +10V$	102	88 82		88	84	80	78	dB min
Power Supply Rejection Ratio	$\pm 10V \leq V \leq \pm 16V$	104	88 82		88	84	80	78	dB min
Output Voltage Swing	Supply = $\pm 15V$ and $R_L = 2 k\Omega$	+14.2	+13.5 +13.3		+13.5	+13.3	+13.4	+13.3	V min
		-13.4	-13.0 -12.7		-13.0	-12.8	-12.9	-12.8	V min
	Supply = +5V and $R_L = 2 k\Omega$ (Note 6)	4.2	3.5 3.3		3.5	3.3	3.4	3.3	V min
		1.3	1.7 2.0		1.7	1.9	1.8	1.9	V max

DC Electrical Characteristics (Note 3) (Continued)

Parameter	Conditions	Typ	LM6165		LM6265		LM6365		Units
			Tested Limit	Design Limit	Tested Limit	Design Limit	Tested Limit	Design Limit	
			(Note 4)	(Note 5)	(Note 4)	(Note 5)	(Note 4)	(Note 5)	
Output Short Circuit Current	Source	65	30 20		30	25	30	25	mA min
	Sink	65	30 20		30	25	30	25	mA min
Supply Current		5.0	6.5 6.8		6.5	6.7	6.8	6.9	mA max

AC Electrical Characteristics (Notes 3 & 7)

Parameter	Conditions	Typ	LM6165		LM6265		LM6365		Units
			Tested Limit	Design Limit	Tested Limit	Design Limit	Tested Limit	Design Limit	
			(Note 4)	(Note 5)	(Note 4)	(Note 5)	(Note 4)	(Note 5)	
Gain-Bandwidth Product	@ F = 20 MHz	725	575 400		575	475	500	400	MHz min
	V+ = ±5V	500							
Slew Rate	A _V = +25 (Note 10)	300	225 200		225	210	200	180	V/μs min
	V+ = ±5V	200							
Power Bandwidth	V _{OUT} = 20 V _{PP}	4.5							MHz
Setting Time	10V Step to 0.1%	80							ns
	A _V = -25, R _L = 2 kΩ								
Phase Margin	A _V = +25	45							Deg
Differential Gain	NTSC, A _V = +25	<0.1							%
Differential Phase	NTSC, A _V = +25	<0.1							Deg
Input Noise Voltage	F = 10 kHz	5							nV/√Hz
Input Noise Current	F = 10 kHz	1.5							pA/√Hz

Note 1: Continuous short-circuit operation at elevated ambient temperature can result in exceeding the maximum allowed junction temperature of 150°C.

Note 2: The typical junction-to-ambient thermal resistance of the molded plastic DIP (N) is 105°C/Watt, the molded plastic SO (M) package is 155°C/Watt, the cerdip (J) package is 125°C/Watt, and the TO-5 (H) package is 155°C/Watt. All numbers apply for packages soldered directly into a printed circuit board.

Note 3: Unless otherwise specified, all limits guaranteed for T_a = T_j = 25°C with supply voltage = ±15V, V_{CM} = 0V, and R_L ≥ 100 kΩ. **Boldface** limits apply over the range listed under "Operating Temperature Range".

Note 4: Guaranteed and 100% production tested. These limits are used to calculate outgoing AQL levels.

Note 5: Guaranteed but not 100% production tested. These limits are not used to calculate outgoing AQL levels.

Note 6: For single supply operation, the following conditions apply: V+ = 5V, V- = 0V, V_{CM} = 2.5V, V_{OUT} = 2.5V. Pin 1 & Pin 8 (V_{OS} Adjust) are each connected to Pin 4 (V-) to realize maximum output swing. This connection will degrade V_{OS}.

Note 7: C_L ≤ 5 pF.


Note 8: In order to achieve optimum AC performance, the input stage was designed without protective clamps. Exceeding the maximum differential input voltage results in reverse breakdown of the base-emitter junction of one of the input transistors and probable degradation of the input parameters (especially V_{OS}, I_{OS}, and Noise).

Note 9: The average voltage that the weakest pin combinations (those involving Pin 2 or Pin 3) can withstand and still conform to the datasheet limits. The test circuit used consists of the human body model of 100 pF in series with 1500Ω.

Note 10: V_{IN} = 0.7V step. For V+ = ±5V, V_{IN} = 0.2V step.


Note 11: Voltage Gain is the total output swing (20V) divided by the input signal required to produce that swing.

Simplified Schematic & Pin Assignments

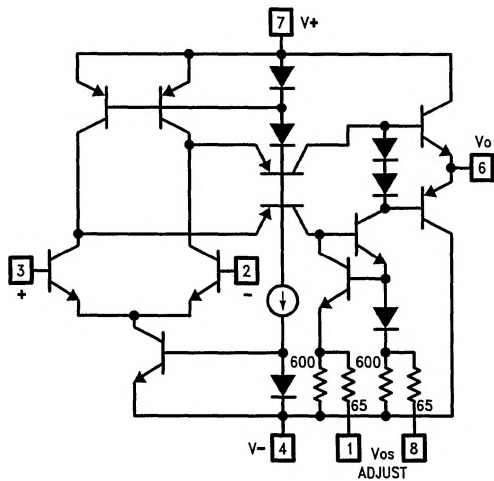

TL/H/9152-3

V_{OS} Adjust Circuit



TL/H/9152-4

Order Number LM6165J, LM6265J, LM6265N or LM6365N
See NS Package Number J08A or N08E