


MC1533 MC1433

OPERATIONAL AMPLIFIERS



MONOLITHIC OPERATIONAL AMPLIFIER



... designed for use as a summing amplifier, integrator, or amplifier with operating characteristics as a function of the external feedback components.

- High-Performance Open Loop Gain Characteristics
 $AV_{OL} = 60,000$ typical
- Low Temperature Drift — $\pm 5 \mu V/^{\circ}C$
- Large Output Voltage Swing —
 $\pm 13 V$ typical @ $\pm 15 V$ Supply
- Low Output Impedance — $Z_{OUT} = 100$ ohms typical

OPERATIONAL AMPLIFIER MONOLITHIC SILICON INTEGRATED CIRCUIT



(MC1433P Only)

FIGURE 1 — CIRCUIT SCHEMATIC


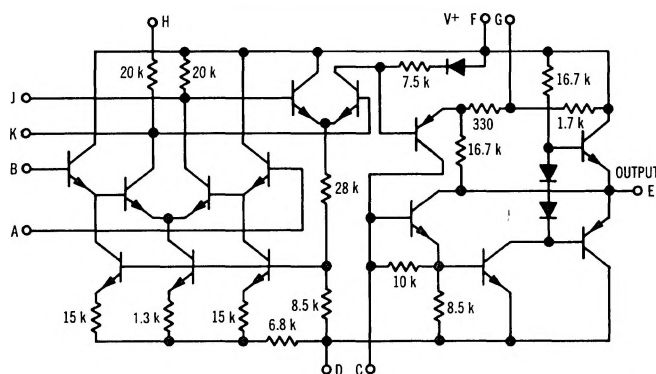


FIGURE 2 — EQUIVALENT CIRCUIT



PIN CONNECTIONS

Schematic	A	B	C	D	E	F	G	H	J	K
"G" Package	1	2	3	4	5	6	7	8	9	10
"F" Package	10	1	2	3	4	5	6	7	8	9
"L" & "P" Packages	4	5	6	7	11	12	13	14	2	3

MC1533, MC1433 (continued)

ELECTRICAL CHARACTERISTICS ($V^+ = +15$ Vdc, $V^- = -15$ Vdc, $T_A = +25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	MC1533			MC1433			Unit
		Min	Typ	Max	Min	Typ	Max	
Open Loop Voltage Gain ($T_A = +25^\circ\text{C}$) ($T_A = T_{\text{low}}$ ① to T_{high} ①)	A_{VOL}	40,000 35,000	60,000 50,000	— —	30,000 20,000	60,000 50,000	— —	—
Output Impedance ($f = 20$ Hz)	Z_{out}	—	100	150	—	100	150	Ω
Input Impedance ($f = 20$ Hz)	Z_{in}	500	1000	—	300	600	—	$k\Omega$
Output Voltage Swing ($R_L = 10$ k Ω) ($R_L = 2$ k Ω)	V_o	± 12 ± 11	± 13 ± 12	— —	± 12 ± 10	± 13 ± 12	— —	V_{peak}
Input Common Mode Voltage Swing	CMV_{in}	+9.0 -8.0	+10 -9.0	— —	+8.0 -8.0	+9.0 -9.0	— —	V_{peak}
Common Mode Rejection Ratio	CM_{rej}	90	100	—	80	100	—	dB
Input Bias Current ($T_A = +25^\circ\text{C}$) ($T_A = T_{\text{low}}$)	I_b	— —	0.5 —	1.0 3.0	— —	0.5 —	2.0 4.0	μA
Input Offset Current ($T_A = +25^\circ\text{C}$) ($T_A = T_{\text{low}}$) ($T_A = T_{\text{high}}$)	$ I_{\text{io}} $	— — —	0.03 — —	0.15 0.5 0.2	— — —	0.1 — —	0.50 0.75 0.75	μA
Input Offset Voltage ② ($T_A = +25^\circ\text{C}$) ($T_A = T_{\text{low}}, T_{\text{high}}$)	$ V_{\text{io}} $	— —	1.0 —	5.0 6.0	— —	1.0 —	7.5 10	mV
Step Response ($C_2 = 10$ pF) { Gain = 100, 10% overshoot, } { $R_1 = 10$ k Ω , $R_2 = 1.0$ M Ω , } { $R_3 = 100$ Ω , $C_1 = 0.01$ μF } t_f — 0.25 — — 0.25 μs t_{pd} — 0.1 — — 0.1 μs dV_{out}/dt ③ — 6.2 — — 6.2 $\text{V}/\mu\text{s}$	t_f t_{pd} dV_{out}/dt ③	— — —	0.25 0.1 6.2	— — —	— — —	0.25 0.1 6.2	— — —	μs μs $\text{V}/\mu\text{s}$
{ Gain = 10, no overshoot, } { $R_1 = 10$ k Ω , $R_2 = 100$ k Ω , } { $R_3 = 10$ Ω , $C_1 = 0.1$ μF } t_f — 0.3 — — 0.3 μs t_{pd} — 0.1 — — 0.1 μs dV_{out}/dt ③ — 2.9 — — 2.9 $\text{V}/\mu\text{s}$	t_f t_{pd} dV_{out}/dt ③	— — —	0.3 0.1 2.9	— — —	— — —	0.3 0.1 2.9	— — —	μs μs $\text{V}/\mu\text{s}$
{ Gain = 1, 5% overshoot, } { $R_1 = 10$ k Ω , $R_2 = 10$ k Ω , } { $R_3 = 10$ Ω , $C_1 = 1.0$ μF } t_f — 0.2 — — 0.2 μs t_{pd} — 0.1 — — 0.1 μs dV_{out}/dt ③ — 2.0 — — 2.0 $\text{V}/\mu\text{s}$	t_f t_{pd} dV_{out}/dt ③	— — —	0.2 0.1 2.0	— — —	— — —	0.2 0.1 2.0	— — —	μs μs $\text{V}/\mu\text{s}$
Average Temperature Coefficient of Input Offset Voltage ($T_A = T_{\text{low}}$ to $+25^\circ\text{C}$) ($T_A = +25^\circ\text{C}$ to T_{high})	$ TC_{V_{\text{io}}} $	— —	8.0 5.0	— —	— —	10 8.0	— —	$\mu\text{V}/^\circ\text{C}$
Average Temperature Coefficient of Input Offset Current ($T_A = T_{\text{low}}$ to T_{high}) ($T_A = +25^\circ\text{C}$ to T_{high})	$ TC_{I_{\text{io}}} $	— —	0.1 0.05	— —	— —	0.1 0.05	— —	$\text{nA}/^\circ\text{C}$
DC Power Dissipation (Power Supply = ± 15 V, $V_o = 0$)	P_D	—	125	170	—	125	240	mW
Positive Supply Sensitivity (V^- constant)	S^+	—	50	150	—	50	200	$\mu\text{V}/\text{V}$
Negative Supply Sensitivity (V^+ constant)	S^-	—	50	150	—	50	200	$\mu\text{V}/\text{V}$

① $T_{\text{high}} = +75^\circ\text{C}$ for MC1433, $T_{\text{low}} = 0$ for MC1433
 $+125^\circ\text{C}$ for MC1533 -55°C for MC1533

② Input offset voltage (V_{io}) may be adjusted to zero.

③ $dV_{\text{out}}/dt = \text{Slew Rate}$

MC1533, MC1433 (continued)

MAXIMUM RATINGS (T_A = +25°C unless otherwise noted)

Rating	Symbol	Value	Unit
Power Supply Voltage	MC1533,MC1433 V ⁺	+20,+18	Vdc
	MC1533,MC1433 V ⁻	-20,-18	Vdc
Differential Input Signal	V _{in}	±10	Volts
Common Mode Input Swing	CMV _{in}	±V ⁺	Volts
Load Current	I _L	10	mA
Output Short Circuit Duration	t _S	1.0	s
Power Dissipation (Package Limitation)	P _D		
Metal Package		680	mW
Derate above T _A = +25°C		4.6	mW/°C
Flat Package		500	mW
Derate above T _A = +25°C		3.3	mW/°C
Dual In-Line Ceramic Package		625	mW
Derate above T _A = +25°C		5.0	mW/°C
Dual In-Line Plastic Package		400	mW
Derate above T _A = +25°C		3.3	mW/°C
Operating Temperature Range	T _A		°C
MC1533		-55 to +125	
MC1433		0 to +75	
Storage Temperature Range	T _{stg}		°C
Metal and Ceramic Packages		-65 to +150	
Plastic Package		-65 to +125	

TYPICAL CHARACTERISTICS

FIGURE 3 – TEST CIRCUIT
V⁺ = +15 Vdc, V⁻ = -15 Vdc, T_A = +25°C

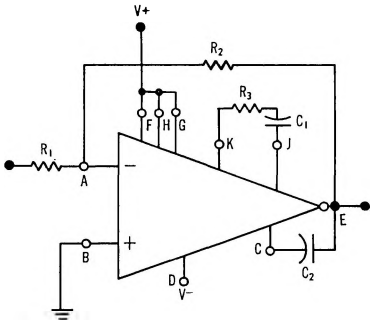


Fig. No.	Curve No.	Test Conditions				
		R ₁ (Ω)	R ₂ (Ω)	R ₃ (Ω)	C ₁ (μF)	C ₂ (pF)
4	1	10 k	10 k	10	1.0	10
	2	10 k	100 k	10	0.1	10
	3	10 k	1.0 M	100	0.01	10
	3	1.0 k	1.0 M	390	0.002	10
5	1	10 k	10 k	10	1.0	10
	2	10 k	100 k	10	0.1	10
	3	10 k	1.0 M	100	0.01	10
	4	1.0 k	1.0 M	390	0.002	10
6	1	0	∞	10	1.0	10
	2	0	∞	10	0.1	10
	3	0	∞	100	0.01	10
	4	0	∞	390	0.002	10

MC1533, MC1433 (continued)

TYPICAL CHARACTERISTICS (continued)
($V^+ = +15\text{ Vdc}$, $V^- = -15\text{ Vdc}$, $T_A = +25^\circ\text{C}$ unless otherwise noted)

FIGURE 4 – LARGE-SIGNAL SWING versus FREQUENCY

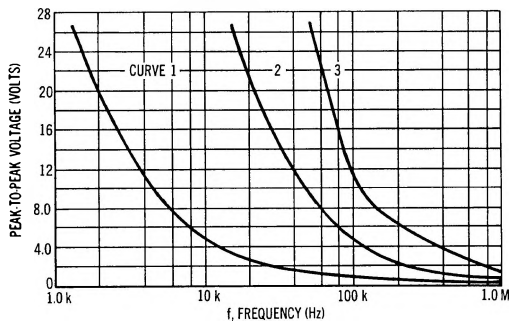


FIGURE 5 – VOLTAGE GAIN versus FREQUENCY

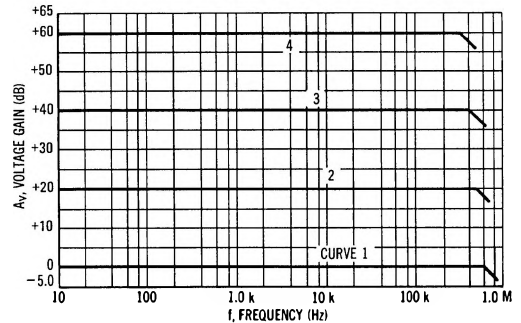


FIGURE 6 – OFFSET ADJUST CIRCUIT


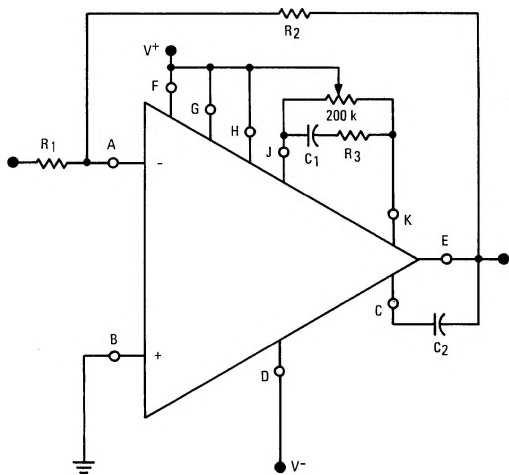


FIGURE 7 – OPEN LOOP VOLTAGE GAIN versus FREQUENCY (HIGH GAIN CONFIGURATION)

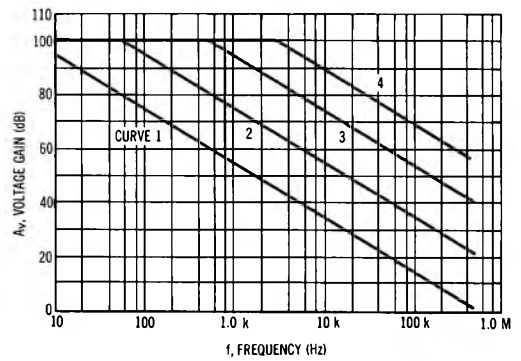

PIN CONNECTIONS

Schematic	A	B	C	D	E	F	G	H	J	K
"G" Package	1	2	3	4	5	6	7	8	9	10
"F" Package	10	1	2	3	4	5	6	7	8	9
"L" & "P" Packages	4	5	6	7	11	12	13	14	2	3

TYPICAL CHARACTERISTICS (continued)

FIGURE 8 – POWER DISSIPATION
versus POWER SUPPLY VOLTAGE

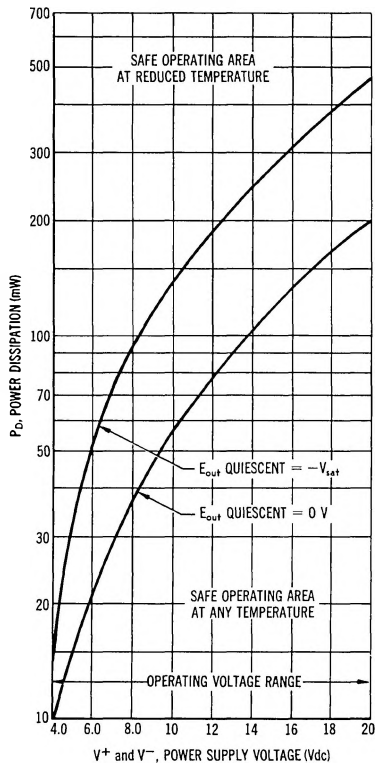


FIGURE 9 – VOLTAGE GAIN
versus POWER SUPPLY VOLTAGE

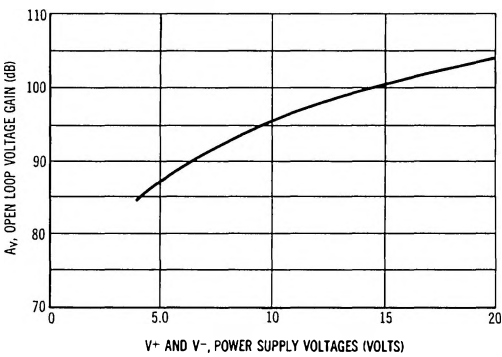


FIGURE 10 – COMMON MODE SWING
versus POWER SUPPLY VOLTAGE

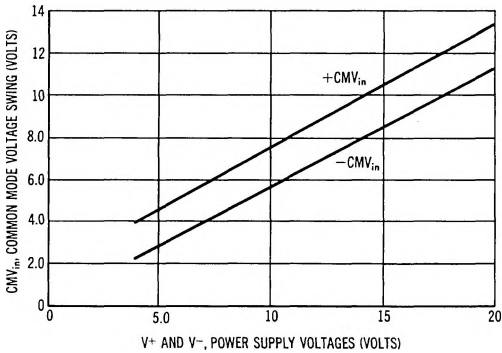


FIGURE 11 – INPUT NOISE VOLTAGE
versus SOURCE RESISTANCE

