# CHIVE INFORMATION

## IOTOROLA \_EMICONDUCTOR TECHNICAL DATA

# The RF Line 110-Channel (750 MHz) CATV Line Extender Amplifier


- 24 V Supply Voltage
- Specified for 110-Channel Performance
- · Superior Gain, Return Loss and DC Current Stability with Temperature
- All Gold Metallization
- 7 GHz f<sub>T</sub> Ion–Implanted Transistors

### **MHW7292**

29 dB GAIN 750 MHz 110-CHANNEL CATV AMPLIFIER

### MAXIMUM RATINGS

		.,,	
Rating	Symbol	Value	Unit
RF Voltage Input (Single Tone)	V <sub>in</sub>	+55	dBmV
DC Supply Voltage	V <sub>CC</sub>	+28	Vdc
Operating Case Temperature Range	T <sub>C</sub>	-20 to +100	°C
Storage Temperature Range	T <sub>stg</sub>	-40 to +100	°C




**CASE 714Y-03, STYLE 1** 

### **ELECTRICAL CHARACTERISTICS** ( $V_{CC} = 24 \text{ Vdc}$ , $T_C = +30^{\circ}\text{C}$ , 75 $\Omega$ system unless otherwise noted)

Characteristic		Symbol	Min	Тур	Max	Unit
Frequency Range		BW	40	_	750	MHz
Power Gain 750 MHz	50 MHz	G <sub>p</sub>	28.2 29	29 29.8	29.8 31	dB
Slope	40-750 MHz	S	0	0.7	2	dB
Gain Flatness (40–750 MHz, Peak to Valley)		_	_	0.4	0.8	dB
Return Loss — Input/Output (Z <sub>o</sub> = 75 Ohn	ns) @ 40 MHz @ f > 40 MHz (Derate)	IRL/ORL	20 —	_	— 0.007	dB dB/MHz
Composite Second Order (V <sub>out</sub> = +40 dBmV/ch., Worst Case)	110-Channel FLAT	CSO <sub>110</sub>	_	-70	-60	dBc
Cross Modulation Distortion @ Ch 2 (V <sub>out</sub> = +40 dBmV/ch., FM = 55 MHz)	110-Channel FLAT	XMD <sub>110</sub>	_	-62	-60	dBc
Composite Triple Beat (V <sub>out</sub> = +40 dBmV/ch., Worst Case)	110-Channel FLAT	CTB <sub>110</sub>	_	-62	-60	dBc
Noise Figure	50 MHz 750 MHz	NF	_	— 5.5	5.5 6.5	dB
DC Current (V <sub>DC</sub> = 24 V, T <sub>C</sub> = 30°C)		I <sub>DC</sub>	280	310	350	mA



### PACKAGE DIMENSIONS

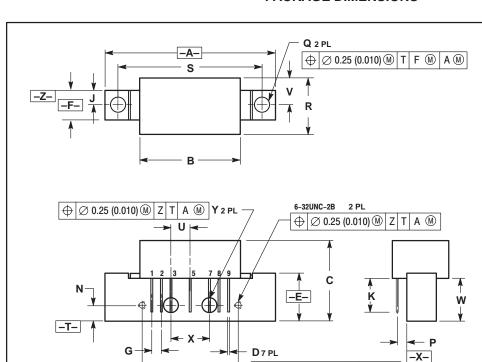

### NOTES:

- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
- 2. CONTROLLING DIMENSION: INCH.

	INC	HES	MILLIMETERS		
DIM	MIN	MAX	MIN	MAX	
Α		1.775		45.08	
В		1.085		27.56	
С		0.840		21.34	
D	0.018	0.022	0.46	0.56	
Е	0.465	0.510	11.81	12.95	
F	0.300	0.325	7.62	8.25	
G	0.100	BSC	2.54 BSC		
J	0.156	BSC	3.96 BSC		
K	0.315	0.355	8.00	8.50	
L	1.00	BSC	25.40 BSC		
N	0.165	BSC	4.19 BSC		
Р	0.100	BSC	2.54	BSC	
Q	0.148	0.168	3.76	4.27	
R		0.600		15.24	
S	1.500	BSC	38.10 BSC		
U	0.200	BSC	5.08 BSC		
V		0.250		6.35	
W	0.435	0.450	11.05	11.43	
Х	0.400	BSC	10.16 BSC		
Υ	0.152	0.163	3.85	4.15	

### STYLE 1:

PIN 1. RF INPUT 2. GROUND

- 3. GROUND 4. DELETED
- 5. VDC 6. DELETED
- 7. GROUND 8. GROUND
- 9. RF OUTPUT

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and (M) are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

⊕ Ø 0.51 (0.020) M T

**CASE 714Y-03 ISSUE D** 

 $A \otimes X$ 

Mfax is a trademark of Motorola, Inc.

### How to reach us:

USA/EUROPE/Locations Not Listed: Motorola Literature Distribution; P.O. Box 5405, Denver, Colorado 80217. 1-303-675-2140 or 1-800-441-2447 JAPAN: Nippon Motorola Ltd.: SPD, Strategic Planning Office, 141, 4-32-1 Nishi-Gotanda, Shagawa-ku, Tokyo, Japan. 03-5487-8488

Customer Focus Center: 1-800-521-6274

Mfax™: RMFAX0@email.sps.mot.com - TOUCHTONE 1-602-244-6609 Motorola Fax Back System - US & Canada ONLY 1-800-774-1848

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park, 51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298

- http://sps.motorola.com/mfax/

HOME PAGE: http://motorola.com/sps/



MHW7292/D