

# □ MN101C61D, MN101C61G

Type	MN101C61D (under development)	MN101C61G
ROM (×8-bit)	64 K	128 K
RAM (×8-bit)	3 K	12 K

Package TQFP080-P-1212D \*Lead-free

Minimum Instruction Execution Time	Standard:	0.1 μs (at 2.5 V to 3.6 V, 20 MHz)
		0.2 μs (at 2.1 V to 3.6 V, 10 MHz)
	Double speed:	0.5 μs (at 1.8 V to 3.6 V, 4 MHz)*
		125 μs (at 1.8 V to 3.6 V, 32 kHz)*
	Double speed:	0.1 μs (at 2.5 V to 3.6 V, 10 MHz)
		0.2 μs (at 2.1 V to 3.6 V, 5 MHz)
0.5 μs (at 1.8 V to 3.6 V, 2 MHz)*		
		62.5 μs (at 1.8 V to 3.6 V, 32 kHz)*

\* The operation guarantee range for flash memory built-in type is 2.2V to 3.0 V or 2.7V to 3.6 V.

**Interrupts**

- RESET • Watchdog • External 0 • External 1 • External 2 • External 3 • External 4 • External 5
- Timer 0 • Timer 1 • Timer 2 • Timer 3 • Timer 4 • Timer 5 • Timer 6 • Time base
- Serial 0 reception • Serial 0 transmission • Serial 1 reception • Serial 1 transmission • Serial 2 • Serial 3
- Automatic transfer finish • A/D conversion finish • Timer 7 (2 systems) • Key interrupts (8 lines)

**Timer Counter**

Timer counter 0 : 8-bit × 1  
 (square-wave/8-bit PWM output, event count, generation of remote control carrier, pulse width measurement)  
 Clock source ..... 1/2, 1/4 of system clock frequency; 1/1, 1/4, 1/16, 1/32, 1/64 of OSC oscillation clock frequency; 1/1 of XI oscillation clock frequency; external clock input  
 Interrupt source ..... coincidence with compare register 0

Timer counter 1 : 8-bit × 1 (square-wave output, event count, synchronous output event)  
 Clock source ..... 1/2, 1/8 of system clock frequency; 1/1, 1/4, 1/16, 1/64, 1/128 of OSC oscillation clock frequency; 1/1 of XI oscillation clock frequency; external clock input  
 Interrupt source ..... coincidence with compare register 1

Timer counter 0, 1 can be cascade-connected.

Timer counter 2 : 8-bit × 1  
 (square-wave/8-bit PWM output, event count, synchronous output event, pulse width measurement)  
 Clock source ..... 1/2, 1/4 of system clock frequency; 1/1, 1/4, 1/16, 1/32, 1/64 of OSC oscillation clock frequency; 1/1 of XI oscillation clock frequency; external clock input  
 Interrupt source ..... coincidence with compare register 2

Timer counter 3 : 8-bit × 1 (square-wave output, event count, generation of remote control carrier)  
 Clock source ..... 1/2, 1/8 of system clock frequency; 1/1, 1/4, 1/16, 1/64, 1/128 of OSC oscillation clock frequency; 1/1 of XI oscillation clock frequency; external clock input  
 Interrupt source ..... coincidence with compare register 3

Timer counter 2, 3 can be cascade-connected.

Timer counter 4 : 8-bit × 1  
 (square-wave/8-bit PWM output, event count, pulse width measurement, serial 1 baud rate timer)  
 Clock source ..... 1/2, 1/4 of system clock frequency; 1/1, 1/4, 1/16, 1/32, 1/64 of OSC oscillation clock frequency; 1/1 of XI oscillation clock frequency; 1/1 of external clock input frequency  
 Interrupt source ..... coincidence with compare register 4

Timer counter 5 : 8-bit × 1  
 (square-wave/8-bit PWM output, event count, pulse width measurement, serial 0 baud rate timer)  
 Clock source ..... 1/2, 1/4 of system clock frequency; 1/1, 1/4, 1/16, 1/32, 1/64 of OSC oscillation clock frequency; 1/1 of XI oscillation clock frequency; 1/1 of external clock input frequency  
 Interrupt source ..... coincidence with compare register 5

<b>Timer Counter (Continue)</b>	Timer counter 6 : 8-bit freerun timer
	Clock source ..... 1/1 of system clock frequency; 1/1, 1/4096, 1/8192 of OSC oscillation clock frequency; 1/1, 1/4096, 1/8192 of XI oscillation clock frequency
	Interrupt source ..... coincidence with compare register 6
	Timer counter 7 : 16-bit × 1 (square-wave/16-bit PWM output, cycle / duty continuous variable, event count, synchronous output event, pulse width measurement, input capture)
	Clock source ..... 1/1, 1/2, 1/4, 1/16 of system clock frequency; 1/1, 1/2, 1/4, 1/16 of OSC oscillation clock frequency; 1/1, 1/2, 1/4, 1/16 of external clock input frequency
	Interrupt source ..... coincidence with compare register 7 (2 lines)
	Time base timer (one-minute count setting)
	Clock source ..... 1/1 of OSC oscillation clock frequency; 1/1 of XI oscillation clock frequency
	Interrupt source ..... 1/128, 1/256, 1/512, 1/1024, 1/8192, 1/32768 of clock source frequency
	Watchdog timer
Interrupt source ..... 1/65536, 1/262144, 1/1048576 of system clock frequency	
DMA controller (automatic data transfer)	
Max. Transfer cycles ..... 255	
Starting factor ..... external request, various types of interrupt, software	
Transfer mode ..... 1-byte transfer, word transfer, burst transfer	

<b>Serial Interface</b>	Serial 0 : synchronous type / UART (full-duplex) × 1
	Clock source ..... 1/2, 1/4 of system clock frequency; pulse output of timer counter 5; 1/2, 1/4, 1/16, 1/64 of OSC oscillation clock frequency
	Serial 1 : synchronous type / UART (full-duplex) × 1
	Clock source ..... 1/2, 1/4 of system clock frequency; pulse output of timer counter 4; 1/2, 1/4, 1/16, 1/64 of OSC oscillation clock frequency
	Serial 2 : synchronous type × 1
	Clock source ..... 1/2, 1/4 of system clock frequency; pulse output of timer counter 3; 1/2, 1/4, 1/16, 1/32 of OSC oscillation clock frequency
	Serial 3 : synchronous type/simple I <sup>2</sup> C × 1
	Clock source ..... 1/2, 1/4 of system clock frequency; pulse output of timer counter 3; 1/2, 1/4, 1/16, 1/32 of OSC oscillation clock frequency

<b>I/O Pins</b>	<b>I/O</b>	62	• Common use • Specified pull-up resistor available • Input/output selectable (bit unit)
	<b>Input</b>	6	• Common use • Specified pull-up resistor available

<b>A/D Inputs</b>	10-Bit × 6-ch. (with S/H)
-------------------	---------------------------

<b>Special Ports</b>	Buzzer output, remote control carrier signal output, high-current drive port
----------------------	--

See the next page for electrical characteristics, pin assignment and support tool.

## Electrical Characteristics


### Supply current

Parameter	Symbol	Condition	Limit			Unit
			min	typ	max	
Operating supply current	IDD1	fosc = 20 MHz, VDD = 3 V, (fs = fosc/2)		5	12	mA
	IDD2	fosc = 8.39 MHz, VDD = 3 V, (fs = fosc/2)		2	5	mA
	IDD3	fx = 32.768 kHz, VDD = 3 V, (fs = fx/2)			40	μA
Supply current at HALT	IDD4	fx = 32.768 kHz, VDD = 3 V, Ta = 25°C		4	8	μA
	IDD5	fx = 32.768 kHz, VDD = 3 V			30	μA
Supply current at STOP	IDD6	VDD = 3 V, Ta = 25°C			2	μA
	IDD7	VDD = 3 V			20	μA

Ta = -40°C to +85°C, VDD = 1.8 V to 3.6 V, VSS = 0 V

Note) Ta = -20°C to +70°C for a flash memory built-in version. Supply voltage range and supply current ratings are also different from the values mentioned above. Refer to Chapter 18 "Flash EEPROM" for details

## Pin Assignment

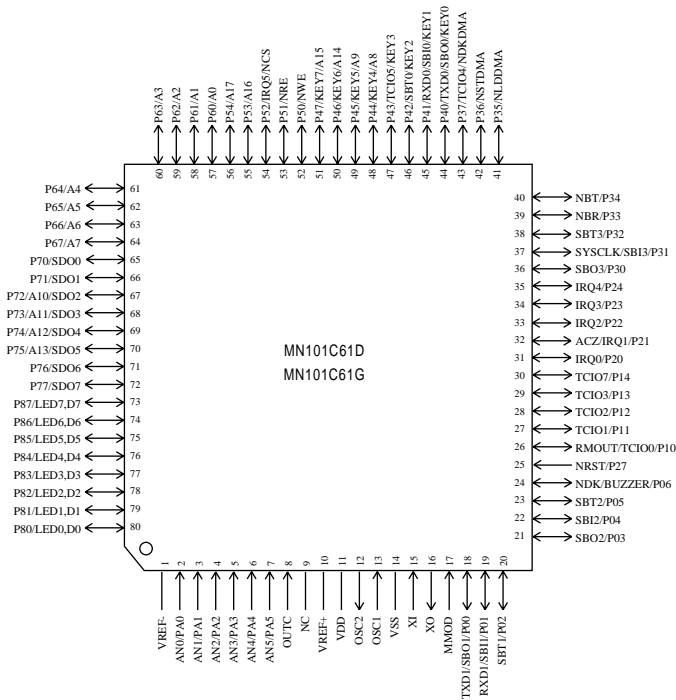

TQFP080-P-1212D \*Lead-free

NC serves as the VPP pin in the MN101CF61G, and cannot be used as a user pin.

**Support Tool**

<b>In-circuit Emulator</b>	PX-ICE101C / D + PX-PRB101C61-TQFP080-P-1212-M	
<b>Flash Memory Built-in Type</b>	Type	MN101CF61G
	ROM (× 8-bit)	128 K
	RAM (× 8-bit)	12 K
	Minimum instruction execution time	0.1 μs (at 2.7 V to 3.6 V, 20 MHz)
		0.2 μs (at 2.7 V to 3.6 V, 10 MHz)
		0.5 μs (at 2.7 V to 3.6 V, 4 MHz)
		125 μs (at 2.7 V to 3.6 V, 32 kHz)
	Package	TQFP080-P-1212D *Lead-free
	Type	MN101CF60G
	ROM (× 8-bit)	128 K
RAM (× 8-bit)	12 K	
Minimum instruction execution time	0.1 μs (at 2.5 V to 3.0 V, 20 MHz)	
	0.2 μs (at 2.2 V to 3.0 V, 10 MHz)	
	0.5 μs (at 2.2 V to 3.0 V, 4 MHz)	
	125 μs (at 2.2 V to 3.0 V, 32 kHz)	
Package	TQFP080-P-1212D *Lead-free	

## Request for your special attention and precautions in using the technical information and semiconductors described in this material

- (1) An export permit needs to be obtained from the competent authorities of the Japanese Government if any of the products or technologies described in this material and controlled under the "Foreign Exchange and Foreign Trade Law" is to be exported or taken out of Japan.
- (2) The technical information described in this material is limited to showing representative characteristics and applied circuits examples of the products. It neither warrants non-infringement of intellectual property right or any other rights owned by our company or a third party, nor grants any license.
- (3) We are not liable for the infringement of rights owned by a third party arising out of the use of the product or technologies as described in this material.
- (4) The products described in this material are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).  
Consult our sales staff in advance for information on the following applications:
  - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
  - Any applications other than the standard applications intended.
- (5) The products and product specifications described in this material are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (6) When designing your equipment, comply with the guaranteed values, in particular those of maximum rating, the range of operating power supply voltage, and heat radiation characteristics. Otherwise, we will not be liable for any defect which may arise later in your equipment.  
Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (7) When using products for which damp-proof packing is required, observe the conditions (including shelf life and amount of time let standing of unsealed items) agreed upon when specification sheets are individually exchanged.
- (8) This material may be not reprinted or reproduced whether wholly or partially, without the prior written permission of Matsushita Electric Industrial Co., Ltd.