

□ MN102L59D

Type	MN102L59D
ROM (x8-bit / x16-bit)	64 K
RAM (x8-bit / x16-bit)	2 K
Package	LQFP064-P-1414 *Lead-free
Minimum Instruction Execution Time	With main clock operated: 100 ns (at 4.5 V to 5.5 V, 5 MHz externally, multiplied by 4 internally)
Interrupts	<ul style="list-style-type: none"> • RESET • Watchdog • Timer counter 0 to 11 • External 0 to 5 • Serial ch.0, 1 transfer finish • NMI pin • A/D conversion finish
Timer Counter	<p>Timer counter 0 : 8-bit × 1 (timer output, event count) Clock source 1/1, 1/64, 1/128 of system clock frequency; external clock Interrupt source underflow of timer counter 0</p> <p>Timer counter 1 : 8-bit × 1 (timer output, event count, A/D conversion start up) Clock source 1/1, 1/64 of system clock frequency; external clock; timer counter 0 output Interrupt source underflow of timer counter 1</p> <p>Timer counter 2 : 8-bit × 1 (timer output, event count) Clock source system clock; external clock; timer counter 0, 1 output Interrupt source underflow of timer counter 2</p> <p>Timer counter 3 : 8-bit × 1 (interval timer, UART baud rate generator) Clock source 1/1, 1/2, 1/64 of system clock frequency; timer counter 0 output Interrupt source underflow of timer counter 3</p> <p>Timer counter 4 : 8-bit × 1 (interval timer) Clock source 1/1, 1/64, 1/128 of system clock frequency; timer counter 0 output Interrupt source underflow of timer counter 4</p> <p>Timer counter 5 : 8-bit × 1 (interval timer) Clock source 1/1, 1/64 of system clock frequency; timer counter 0, 4 output Interrupt source underflow of timer counter 5</p> <p>Timer counter 6 : 16-bit × 1 (timer output, event count) Clock source 1/1, 1/128 of system clock frequency; external clock; timer counter 0 output Interrupt source underflow of timer counter 6</p> <p>Timer counter 7 : 16-bit × 1 (timer output, event count) Clock source 1/1, 1/128 of system clock frequency; external clock; timer counter 0 output Interrupt source underflow of timer counter 7</p> <p>Timer counter 8 : 8-bit × 1 (timer output, event count, simple PWM output) Clock source 1/2, 1/8 of system clock frequency; external clock; timer counter 0 output Interrupt source underflow of timer counter 8</p> <p>Timer counter 9 : 8-bit × 1 (timer output, event count, simple PWM output) Clock source 1/2, 1/8 of system clock frequency; external clock; timer counter 0 output Interrupt source underflow of timer counter 9</p> <p>Timer counter 10 : 8-bit × 1 (timer output, simple inverter control [simple 6-phase PWM output]) Clock source high-speed clock (after multiplication); 1/1, 1/2, 1/8 of system clock frequency Interrupt source overflow of timer counter 10</p> <p>Timer counter 11 : 16-bit updown counter × 1 (highly functional inverter control [simple 6-phase PWM output], A/D conversion start) Clock source high-speed clock (after multiplication); 1/1 of system clock frequency Interrupt source overflow of timer counter 11; underflow of timer counter 11</p>

Connectable timer counter 0, 1, 2 timer counter 0, 4, 5

Serial Interface	Serial 0, 1 : 1 to 8-bit × 1 (common use with half-duplex UART, transfer direction of MSB/LSB selectable) Clock source 1/2, 1/4, 1/16 of system clock, 1/2 of timer counter 3, external clock Half-duplex UART × 2 (common use with serial 0, 1)
I/O Pins	I/O 52 • Common use : 52 (by bit)
A/D Inputs	10-bit × 12-ch. (with S/H) : 4 channels for common use
PWM	16-bit × 2-ch. (common use with timer counter 6,7) simple 6-phase PWM output 8-bit × 1-ch.(common use with timer counter 10) 6-phase PWM output 16-bit × 1ch. (timer counter 11)
Notes	6-phase PWM output support


Electric Characteristics

Supply current

Parameter	Symbol	Condition	Limit			Unit
			min	typ	max	
Operating supply current	IDDopr	VI = VDD or VSS, output open f = 5 MHz , VDD = 5.0 V			75	mA
Supply current at STOP	IDDS	Pin with pull-up resistor is open all other input pins and Hi-Z state input/output			50	μA
Supply current at HALT0	IDDH	pins are simultaneously applied VDD or VSS level f = 5 MHz , VDD = 5.0 V, output open			30	mA

(Ta = -20°C to +85°C , VDD = 5.0 V , VSS = 0 V)

Pin Assignment

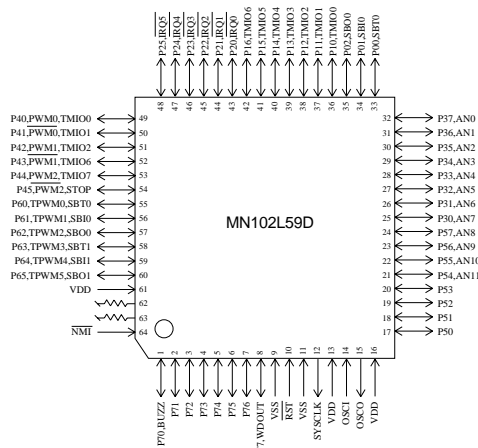

LQFP064-P-1414 *Lead-free

* The MN102LF59D is manufactured and sold under license agreement with BULL CP8 Inc.

Support Tool

Note that MN102LF59D cannot be used as the IC card.

In-circuit Emulator	PX-ICE102L00 + PX-PRB102L59-LQFP064-P-1414	
Flash Memory Built-in Type	Type	MN102LF59D [ES (Engineering Sample) available]
	ROM (× 8-bit / × 16-bit)	64 K
	RAM (× 8-bit / × 16-bit)	2 K
	Minimum instruction execution time	100 ns (at 4.5 V to 5.5 V, 5 MHz externally, multiplied by 4 internally)
	Package	LQFP064-P-1414 *Lead-free

Request for your special attention and precautions in using the technical information and semiconductors described in this material

- (1) An export permit needs to be obtained from the competent authorities of the Japanese Government if any of the products or technologies described in this material and controlled under the "Foreign Exchange and Foreign Trade Law" is to be exported or taken out of Japan.
- (2) The technical information described in this material is limited to showing representative characteristics and applied circuits examples of the products. It neither warrants non-infringement of intellectual property right or any other rights owned by our company or a third party, nor grants any license.
- (3) We are not liable for the infringement of rights owned by a third party arising out of the use of the product or technologies as described in this material.
- (4) The products described in this material are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).
Consult our sales staff in advance for information on the following applications:
 - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
 - Any applications other than the standard applications intended.
- (5) The products and product specifications described in this material are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (6) When designing your equipment, comply with the guaranteed values, in particular those of maximum rating, the range of operating power supply voltage, and heat radiation characteristics. Otherwise, we will not be liable for any defect which may arise later in your equipment.
Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (7) When using products for which damp-proof packing is required, observe the conditions (including shelf life and amount of time let standing of unsealed items) agreed upon when specification sheets are individually exchanged.
- (8) This material may be not reprinted or reproduced whether wholly or partially, without the prior written permission of Matsushita Electric Industrial Co., Ltd.