

**HIGH VOLTAGE FAST-SWITCHING  
NPN POWER TRANSISTORS**



- HIGH SWITCHING SPEED NPN POWER TRANSISTORS
- EASY TO DRIVE
- HIGH VOLTAGE FOR OFF-LINE APPLICATIONS
- 100 KHz SWITCHING SPEED
- LOW COST DRIVE CIRCUITS
- LOW DYNAMIC SATURATION

**APPLICATIONS:**

- SWITCH MODE POWER SUPPLIES
- MOTOR DRIVERS

**DESCRIPTION**

These Easy-to-Drive FASTSWITCH NPN power transistors are specially designed for high reliability industrial and professional power driving applications such as motor drives and off-line switching power supplies. ETD transistors will operate using easy drive circuits at up to 100KHz; this helps to simplify designs and improve reliability. The superior switching performance and low crossover losses reduce dissipation and consequently lowers the equipment operating temperature.

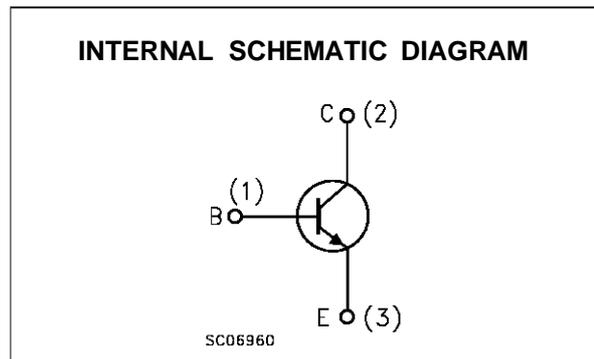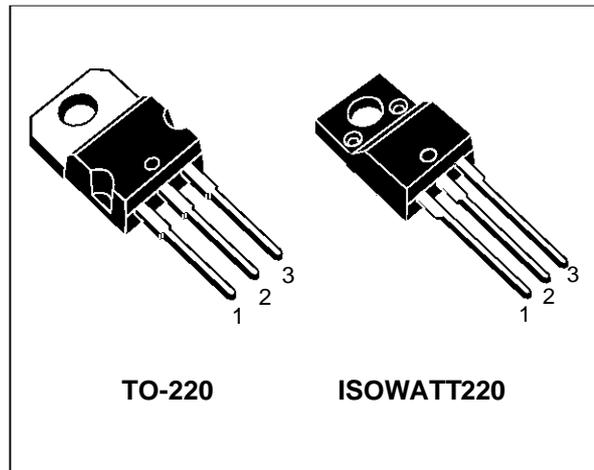

**ABSOLUTE MAXIMUM RATINGS**

Symbol	Parameter	Value		Unit
		BUF405A	BUF405AFI	
$V_{CEV}$	Collector-Emitter Voltage ( $V_{BE} = -1.5 V$ )	1000		V
$V_{CEO}$	Collector-Emitter Voltage ( $I_B = 0$ )	450		V
$V_{EBO}$	Emitter-Base Voltage ( $I_C = 0$ )	7		V
$I_C$	Collector Current	7.5		A
$I_{CM}$	Collector Peak Current ( $t_p < 5 ms$ )	15		A
$I_B$	Base Current	3		A
$I_{BM}$	Base Peak Current ( $t_p < 5 ms$ )	4.5		A
$P_{tot}$	Total Dissipation at $T_c = 25 ^\circ C$	80	40	W
$T_{stg}$	Storage Temperature	-65 to 150		$^\circ C$
$T_j$	Max Operation Junction Temperature	150		$^\circ C$

# BUF405A / BUF405AFI

## THERMAL DATA

			TO-220	ISOWATT220	°C/W
R <sub>thj-case</sub>	Thermal Resistance Junction-Case	Max	1.56	3.12	°C/W


## ELECTRICAL CHARACTERISTICS (T<sub>case</sub> = 25 °C unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I <sub>CEr</sub>	Collector Cut-off Current (R <sub>BE</sub> = 5 Ω)	V <sub>CE</sub> = V <sub>CEV</sub> V <sub>CE</sub> = V <sub>CEV</sub> T <sub>c</sub> = 100 °C			0.1 0.5	mA mA
I <sub>CEV</sub>	Collector Cut-off Current (I <sub>B</sub> = 0)	V <sub>CE</sub> = V <sub>CEV</sub> V <sub>BE</sub> = -1.5 V V <sub>CE</sub> = V <sub>CEV</sub> V <sub>BE</sub> = -1.5 V T <sub>c</sub> = 100°C			0.1 0.5	mA mA
I <sub>EBO</sub>	Emitter Cut-off Current (I <sub>C</sub> = 0)	V <sub>BE</sub> = 5 V			1	mA
V <sub>CEO(sus)*</sub>	Collector-Emitter Sustaining Voltage	I <sub>C</sub> = 200 mA L = 25 mH	450			V
V <sub>EBO</sub>	Emitter Base Voltage (I <sub>C</sub> = 0)	I <sub>E</sub> = 50 mA	7			V
V <sub>CE(sat)*</sub>	Collector-Emitter Saturation Voltage	I <sub>C</sub> = 2.5 A I <sub>B</sub> = 0.25 A I <sub>C</sub> = 2.5 A I <sub>B</sub> = 0.25 A T <sub>c</sub> = 100°C I <sub>C</sub> = 5 A I <sub>B</sub> = 1 A I <sub>C</sub> = 5 A I <sub>B</sub> = 1 A T <sub>c</sub> = 100°C		0.8 0.5	2.8 2	V V V V
V <sub>BE(sat)*</sub>	Base-Emitter Saturation Voltage	I <sub>C</sub> = 2.5 A I <sub>B</sub> = 0.25 A I <sub>C</sub> = 2.5 A I <sub>B</sub> = 0.25 A T <sub>c</sub> = 100°C I <sub>C</sub> = 5 A I <sub>B</sub> = 1 A I <sub>C</sub> = 5 A I <sub>B</sub> = 1 A T <sub>c</sub> = 100°C		0.9 1.1	1.5 1.5	V V V V
di <sub>c</sub> /dt	Rate of rise on-state Collector Current	V <sub>CC</sub> = 300 V R <sub>C</sub> = 0 t <sub>p</sub> = 3 μs I <sub>B1</sub> = 0.375 A T <sub>j</sub> = 25°C I <sub>B1</sub> = 0.375 A T <sub>j</sub> = 100°C I <sub>B1</sub> = 1.5 A T <sub>j</sub> = 100°C	30 60	40		A/μs A/μs A/μs
V <sub>CE(3μs)</sub>	Collector-Emitter Dynamic Voltage	V <sub>CC</sub> = 300 V R <sub>C</sub> = 120 Ω I <sub>B1</sub> = 0.375 A T <sub>j</sub> = 25°C T <sub>j</sub> = 100°C		2.1	8	V V
V <sub>CE(5μs)</sub>	Collector-Emitter Dynamic Voltage	V <sub>CC</sub> = 300 V R <sub>C</sub> = 120 Ω I <sub>B1</sub> = 0.375 A T <sub>j</sub> = 25°C T <sub>j</sub> = 100°C		1.1	4	V V
t <sub>s</sub> t <sub>f</sub> t <sub>c</sub>	Storage Time Fall Time Cross Over Time	I <sub>C</sub> = 2.5 A V <sub>CC</sub> = 50 V V <sub>BB</sub> = -5 V R <sub>BB</sub> = 2.4 Ω V <sub>clamp</sub> = 400 V I <sub>B1</sub> = 0.25 A L = 1 mH		0.8 0.05 0.08		μs μs μs
t <sub>s</sub> t <sub>f</sub> t <sub>c</sub>	Storage Time Fall Time Cross Over Time	I <sub>C</sub> = 2.5 A V <sub>CC</sub> = 50 V V <sub>BB</sub> = -5 V R <sub>BB</sub> = 2.4 Ω V <sub>clamp</sub> = 400 V I <sub>B1</sub> = 0.25 A L = 1 mH T <sub>j</sub> = 100°C			1.8 0.1 0.18	μs μs μs
V <sub>CEW</sub>	Maximum Collector Emitter Voltage without Snubber	I <sub>C</sub> = 2.5 A V <sub>CC</sub> = 50 V V <sub>BB</sub> = -5 V R <sub>BB</sub> = 2.4 Ω V <sub>clamp</sub> = 400 V I <sub>B1</sub> = 0.25 A L = 1 mH T <sub>j</sub> = 125°C	500			V
t <sub>s</sub> t <sub>f</sub> t <sub>c</sub>	Storage Time Fall Time Cross Over Time	I <sub>C</sub> = 2.5 A V <sub>CC</sub> = 50 V V <sub>BB</sub> = 0 R <sub>BB</sub> = 0.6 Ω V <sub>clamp</sub> = 400 V I <sub>B1</sub> = 0.25 A L = 1 mH		1.5 0.04 0.07		μs μs μs

**ELECTRICAL CHARACTERISTICS** (continued)


Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
$t_s$ $t_f$ $t_c$	Storage Time Fall Time Cross Over Time	$I_C = 2.5 \text{ A}$ $V_{BB} = 0$ $V_{clamp} = 400 \text{ V}$ $L = 1 \text{ mH}$	$V_{CC} = 50 \text{ V}$ $R_{BB} = 0.6 \Omega$ $I_{B1} = 0.25 \text{ A}$ $T_j = 100^\circ\text{C}$			3 0.15 0.25	$\mu\text{s}$ $\mu\text{s}$ $\mu\text{s}$
$V_{CEW}$	Maximum Collector Emitter Voltage without Snubber	$I_C = 2.5 \text{ A}$ $V_{BB} = 0$ $V_{clamp} = 400 \text{ V}$ $L = 1 \text{ mH}$	$V_{CC} = 50 \text{ V}$ $R_{BB} = 0.6 \Omega$ $I_{B1} = 0.25 \text{ A}$ $T_j = 125^\circ\text{C}$	500			V
$t_s$ $t_f$ $t_c$	Storage Time Fall Time Cross Over Time	$I_C = 5 \text{ A}$ $V_{BB} = -5 \text{ V}$ $V_{clamp} = 400 \text{ V}$ $L = 0.5 \text{ mH}$	$V_{CC} = 50 \text{ V}$ $R_{BB} = 2.4 \Omega$ $I_{B1} = 1 \text{ A}$		1.9 0.06 0.12		$\mu\text{s}$ $\mu\text{s}$ $\mu\text{s}$
$t_s$ $t_f$ $t_c$	Storage Time Fall Time Cross Over Time	$I_C = 5 \text{ A}$ $V_{BB} = -5 \text{ V}$ $V_{clamp} = 400 \text{ V}$ $L = 0.5 \text{ mH}$	$V_{CC} = 50 \text{ V}$ $R_{BB} = 2.4 \Omega$ $I_{B1} = 1 \text{ A}$ $T_j = 100^\circ\text{C}$			3.2 0.12 0.3	$\mu\text{s}$ $\mu\text{s}$ $\mu\text{s}$
$V_{CEW}$	Maximum Collector Emitter Voltage without Snubber	$I_{C\text{Woff}} = 7.5 \text{ A}$ $V_{BB} = -5 \text{ V}$ $L = 0.33 \text{ mH}$ $T_j = 125^\circ\text{C}$	$V_{CC} = 50 \text{ V}$ $R_{BB} = 2.4 \Omega$ $I_{B1} = 1.5 \text{ A}$	400			V

Turn-on Switching Test Circuit

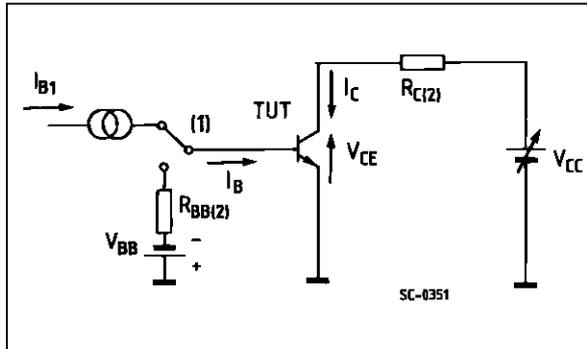

1 Fast electronic switch 2 Non-inductive Resistor


Turn-off Switching Test Circuit

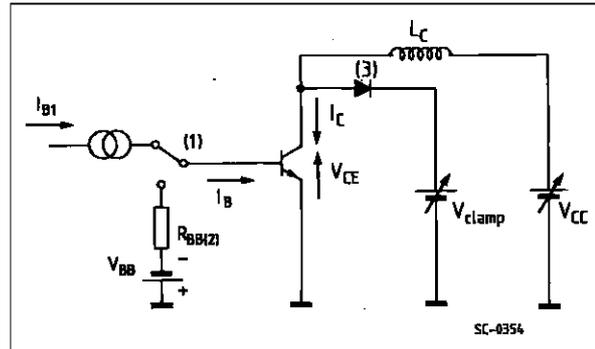

1 Fast electronic switch 2 Non-inductive Resistor  
3 Fast recovery rectifier


**TO-220 MECHANICAL DATA**

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	4.40		4.60	0.173		0.181
C	1.23		1.32	0.048		0.051
D	2.40		2.72	0.094		0.107
D1		1.27			0.050	
E	0.49		0.70	0.019		0.027
F	0.61		0.88	0.024		0.034
F1	1.14		1.70	0.044		0.067
F2	1.14		1.70	0.044		0.067
G	4.95		5.15	0.194		0.203
G1	2.4		2.7	0.094		0.106
H2	10.0		10.40	0.393		0.409
L2		16.4			0.645	
L4	13.0		14.0	0.511		0.551
L5	2.65		2.95	0.104		0.116
L6	15.25		15.75	0.600		0.620
L7	6.2		6.6	0.244		0.260
L9	3.5		3.93	0.137		0.154
DIA.	3.75		3.85	0.147		0.151

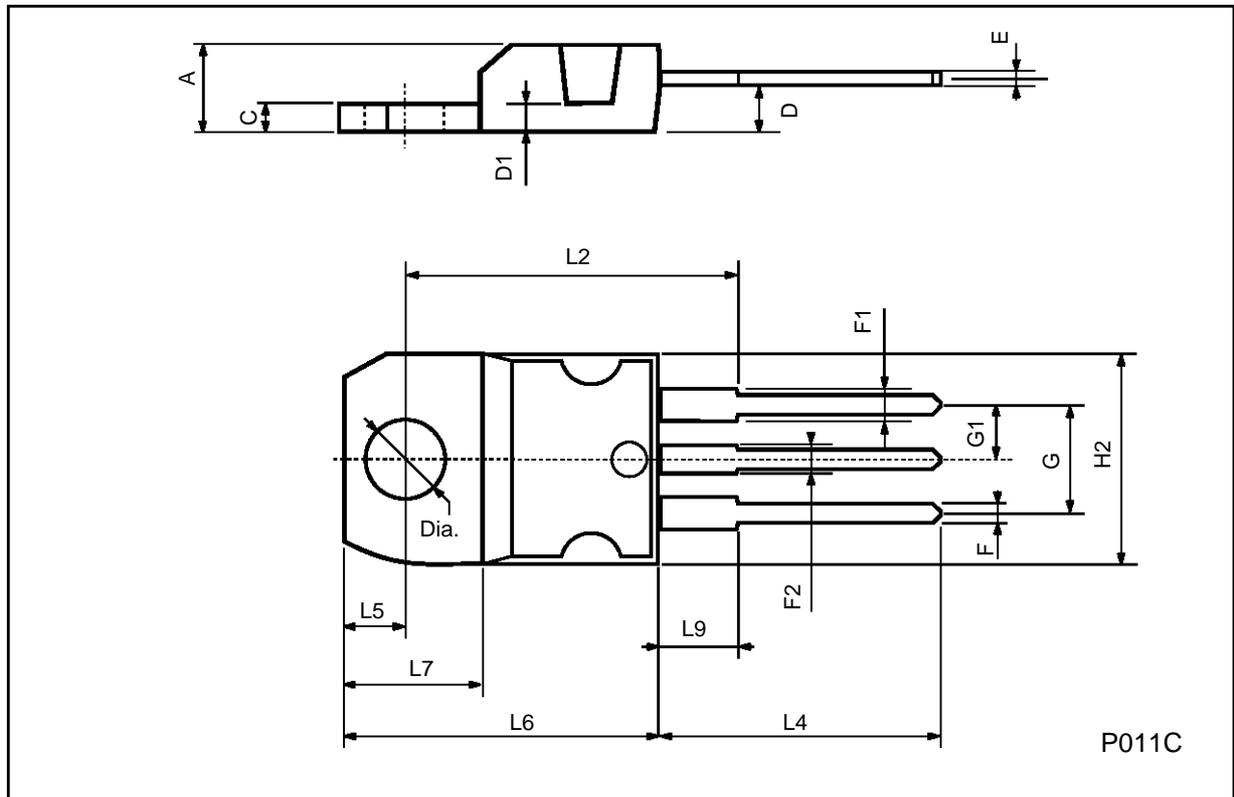

**ISOWATT220 MECHANICAL DATA**

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	4.4		4.6	0.173		0.181
B	2.5		2.7	0.098		0.106
D	2.5		2.75	0.098		0.108
E	0.4		0.7	0.015		0.027
F	0.75		1	0.030		0.039
F1	1.15		1.7	0.045		0.067
F2	1.15		1.7	0.045		0.067
G	4.95		5.2	0.195		0.204
G1	2.4		2.7	0.094		0.106
H	10		10.4	0.393		0.409
L2		16			0.630	
L3	28.6		30.6	1.126		1.204
L4	9.8		10.6	0.385		0.417
L6	15.9		16.4	0.626		0.645
L7	9		9.3	0.354		0.366
Ø	3		3.2	0.118		0.126

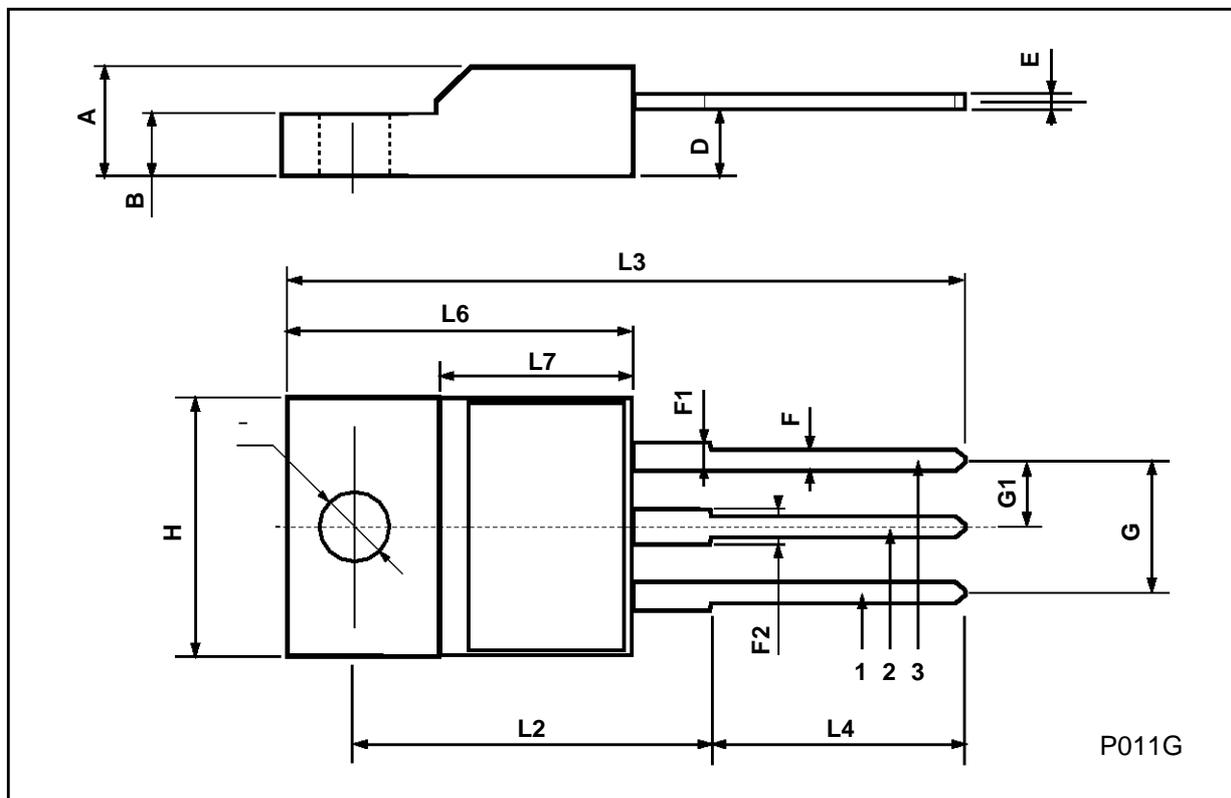

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1997 SGS-THOMSON Microelectronics - Printed in Italy - All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES  
Australia - Brazil - Canada - China - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands -  
Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A  
...