

Silicon NPN Darlington Power Transistor


TIP162

DESCRIPTION

- Collector-Emitter Sustaining Voltage-
: $V_{CE(SUS)} = 380V(\text{Min})$
- Low Collector-Emitter Saturation Voltage-
: $V_{CE(sat)} = 2.9V(\text{Max.}) @ I_C = 10A$


APPLICATIONS

- Designed for use in automotive ignition, switching and motor control applications.

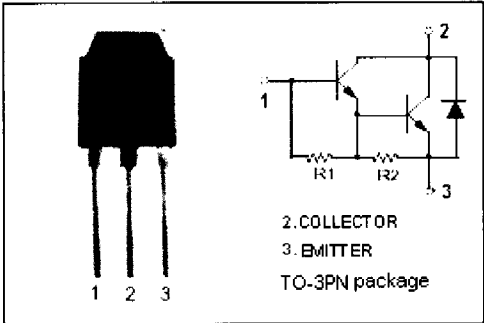

ABSOLUTE MAXIMUM RATINGS($T_a=25^{\circ}C$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	380	V
V_{CEO}	Collector-Emitter Voltage	380	V
V_{EBO}	Emitter-Base Voltage	5	V
I_C	Collector Current-Continuous	10	A
I_{CM}	Collector Current-Peak	15	A
I_B	Base Current- Continuous	1.0	A
P_C	Collector Power Dissipation @ $T_c=25^{\circ}C$	125	W
T_j	Junction Temperature	150	$^{\circ}C$
T_{stg}	Storage Temperature Range	-65~150	$^{\circ}C$

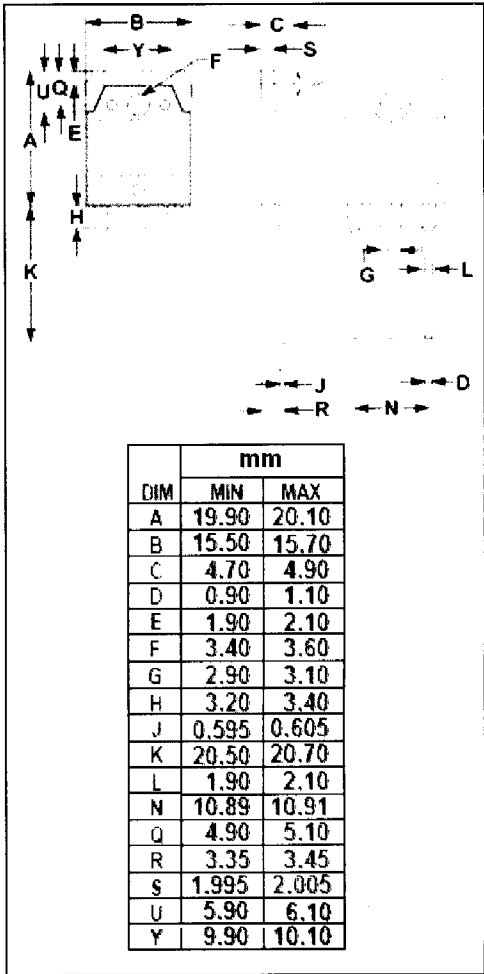

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance, Junction to Case	1.0	$^{\circ}C/W$

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.

Silicon NPN Darlington Power Transistor

TIP162

ELECTRICAL CHARACTERISTICS

$T_C=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CE(sat)-1}$	Collector-Emitter Saturation Voltage	$I_C = 6.5\text{A}, I_B = 0.1\text{A}$			2.8	V
$V_{CE(sat)-2}$	Collector-Emitter Saturation Voltage	$I_C = 10\text{A}, I_B = 1\text{A}$			2.9	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C = 6.5\text{A}, I_B = 0.1\text{A}$			2.2	V
I_{CEO}	Collector Cutoff current	$V_{CE} = 380\text{V}, I_B = 0$			1.0	mA
I_{EBO}	Emitter Cutoff Current	$V_{EB} = 5\text{V}, I_C = 0$			100	mA
h_{FE}	DC Current Gain	$I_C = 4\text{A}; V_{CE} = 2.2\text{V}$	200			
V_F	C-E Diode Forward Voltage	$I_F = 10\text{A}$			3.5	V

Switching Times

t_d	Delay Time	$V_{CC} = 33\text{V}, I_C = 6.5\text{A},$ $I_{B1} = -I_{B2} = 100\text{mA};$ $t_p = 20\text{ }\mu\text{s}; \text{Duty Cycle} \leq 2\%$		0.3		μs
t_r	Rise Time			1.5		μs
t_{stg}	Storage Time			2.3		μs
t_f	Fall Time			2.8		μs