

XP04654 (XP4654)

Silicon NPN epitaxial planer transistor (Tr1)

Silicon PNP epitaxial planer transistor (Tr2)

For high speed switching

Features

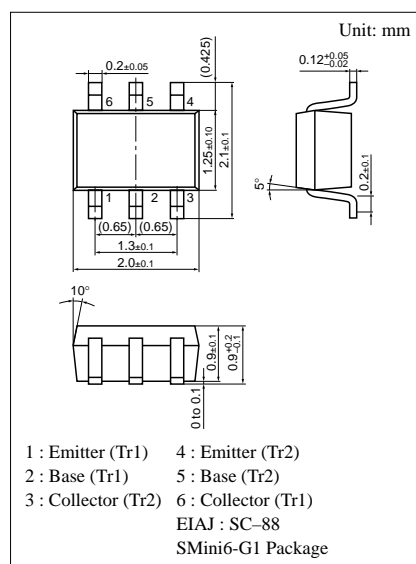
- Two elements incorporated into one package.
- Reduction of the mounting area and assembly cost by one half.

Basic Part Number of Element

- 2SC3757 + 2SA1738

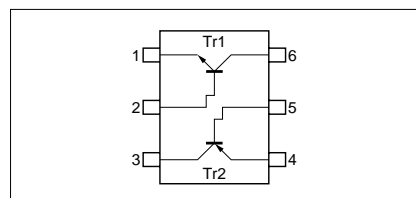
Absolute Maximum Ratings (Ta=25°C)

	Parameter	Symbol	Ratings	Unit
Tr1	Collector to base voltage	V_{CBO}	40	V
	Collector to emitter voltage	V_{CES}	40	V
	Emitter to base voltage	V_{EBO}	5	V
	Collector current	I_C	100	mA
	Peak collector current	I_{CP}	300	mA
Tr2	Collector to base voltage	V_{CBO}	-15	V
	Collector to emitter voltage	V_{CES}	-15	V
	Emitter to base voltage	V_{EBO}	-4	V
	Collector current	I_C	-50	mA
	Peak collector current	I_{CP}	-100	mA
Overall	Total power dissipation	P_T	150	mW
	Junction temperature	T_j	150	°C
	Storage temperature	T_{stg}	-55 to +150	°C



Marking Symbol: ED

Internal Connection



Note) The Part number in the Parenthesis shows conventional part number.

■ Electrical Characteristics (T_a=25°C)

● Tr1

Parameter	Symbol	Conditions	min	typ	max	Unit
Collector cutoff current	I _{CBO}	V _{CB} = 40V, I _E = 0			0.1	μA
Emitter cutoff current	I _{EBO}	V _{EB} = 4V, I _C = 0			0.1	μA
Forward current transfer ratio	h _{FE}	V _{CE} = 1V, I _C = 10mA	60		320	
Collector to emitter saturation voltage	V _{CE(sat)}	I _C = 10mA, I _B = 1mA		0.17	0.25	V
Base to emitter saturation voltage	V _{BE(sat)}	I _C = 10mA, I _B = 1mA			1.0	V
Transition frequency	f _T	V _{CB} = 10V, I _E = -10mA, f = 200MHz		450		MHz
Collector output capacitance	C _{ob}	V _{CB} = 10V, I _E = 0, f = 1MHz		2	6	pF
Turn-on time	t _{on}	*1		17		ns
Turn-off time	t _{off}			17		ns
Storage time	t _{stg}			10		ns

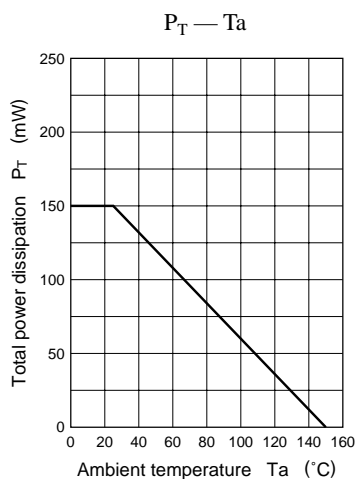
● Tr2

Parameter	Symbol	Conditions	min	typ	max	Unit
Collector cutoff current	I _{CBO}	V _{CB} = -8V, I _E = 0			- 0.1	μA
Emitter cutoff current	I _{EBO}	V _{EB} = -3V, I _C = 0			- 0.1	μA
Forward current transfer ratio	h _{FE1}	V _{CE} = -1V, I _C = -10mA	50		150	
	h _{FE2}	V _{CE} = -1V, I _C = -1mA	30			
Collector to emitter saturation voltage	V _{CE(sat)}	I _C = -10mA, I _B = -1mA		- 0.1	- 0.2	V
Transition frequency	f _T	V _{CB} = -10V, I _E = 10mA, f = 200MHz	800	1500		MHz
Collector output capacitance	C _{ob}	V _{CB} = -5V, I _E = 0, f = 1MHz		1		pF
Turn-on time	t _{on}	*2		12		ns
Turn-off time	t _{off}			20		ns
Storage time	t _{stg}			19		ns

*1 Refer to the test circuit (page 3)



*2 Refer to the test circuit (page 4)

Common characteristics chart

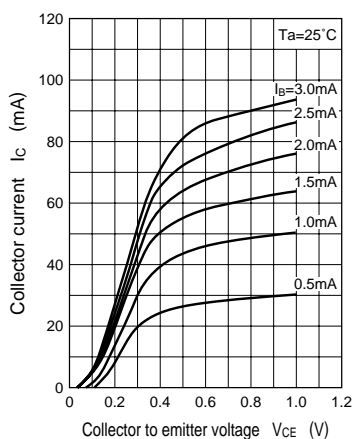
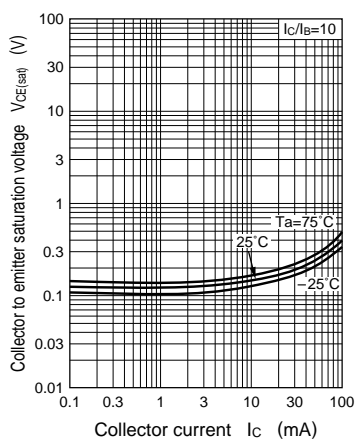
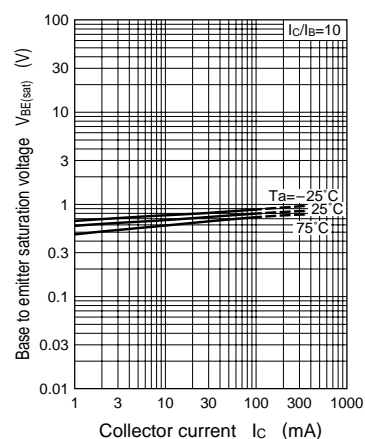
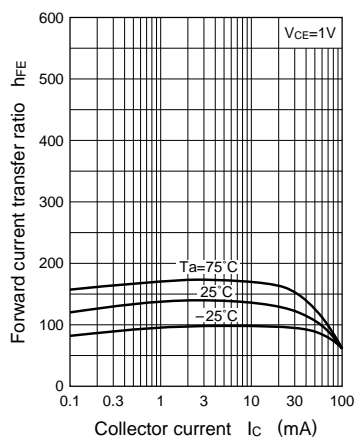
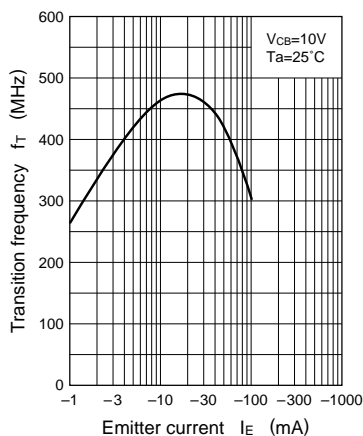
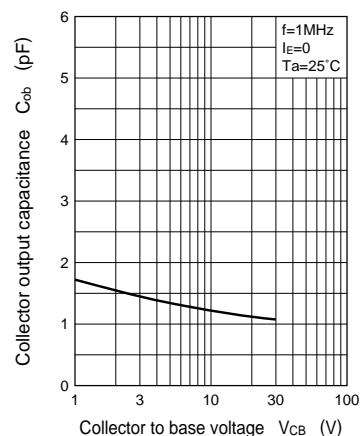


Characteristics charts of Tr1

Switching time measuring circuit



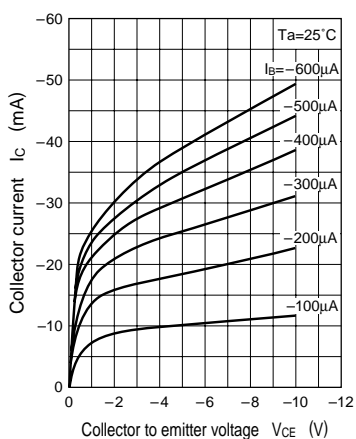
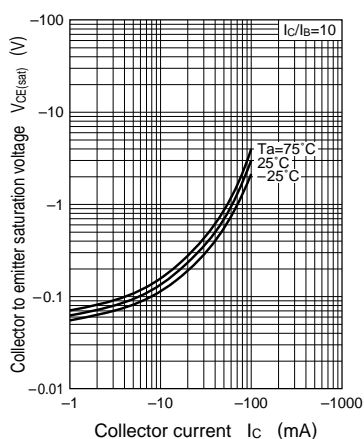
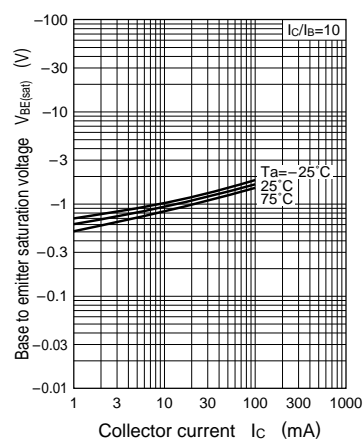
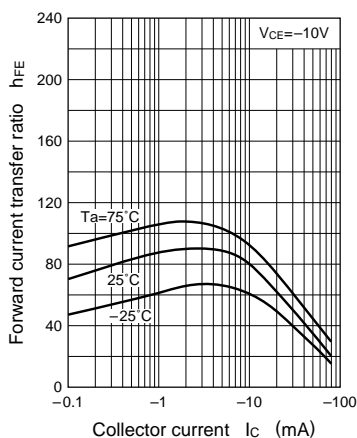
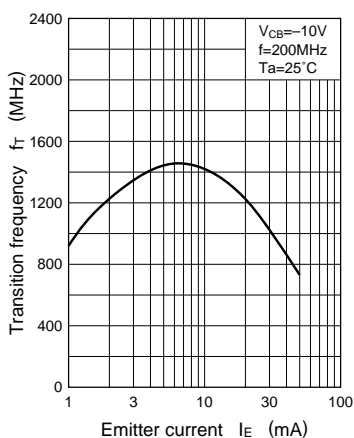
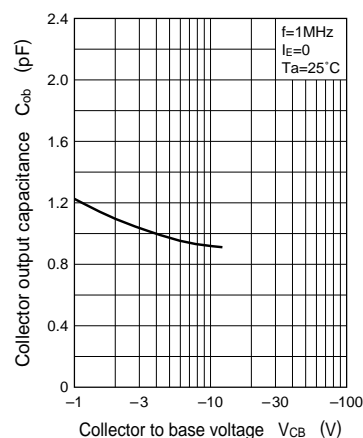
 t_{on}, t_{off} Test Circuit t_{stg} Test Circuit

(Wave form at A)

 $I_C - V_{CE}$  $V_{CE(sat)} - I_C$  $V_{BE(sat)} - I_C$  $h_{FE} - I_C$  $f_T - I_E$  $C_{ob} - V_{CB}$ 

Characteristics charts of Tr2

Switching time measuring circuit

 t_{on} , t_{off} Test Circuit t_{stg} Test Circuit $I_C - V_{CE}$  $V_{CE(sat)} - I_C$  $V_{BE(sat)} - I_C$  $h_{FE} - I_C$  $f_T - I_E$  $C_{ob} - V_{CB}$ 

Request for your special attention and precautions in using the technical information and semiconductors described in this material

- (1) An export permit needs to be obtained from the competent authorities of the Japanese Government if any of the products or technologies described in this material and controlled under the "Foreign Exchange and Foreign Trade Law" is to be exported or taken out of Japan.
- (2) The technical information described in this material is limited to showing representative characteristics and applied circuit examples of the products. It does not constitute the warranting of industrial property, the granting of relative rights, or the granting of any license.
- (3) The products described in this material are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).
Consult our sales staff in advance for information on the following applications:
 - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
 - Any applications other than the standard applications intended.
- (4) The products and product specifications described in this material are subject to change without notice for reasons of modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the guaranteed values, in particular those of maximum rating, the range of operating power supply voltage and heat radiation characteristics. Otherwise, we will not be liable for any defect which may arise later in your equipment.
Even when the products are used within the guaranteed values, redundant design is recommended, so that such equipment may not violate relevant laws or regulations because of the function of our products.
- (6) When using products for which dry packing is required, observe the conditions (including shelf life and after-unpacking standby time) agreed upon when specification sheets are individually exchanged.
- (7) No part of this material may be reprinted or reproduced by any means without written permission from our company.

Please read the following notes before using the datasheets

- A. These materials are intended as a reference to assist customers with the selection of Panasonic semiconductor products best suited to their applications.
Due to modification or other reasons, any information contained in this material, such as available product types, technical data, and so on, is subject to change without notice.
Customers are advised to contact our semiconductor sales office and obtain the latest information before starting precise technical research and/or purchasing activities.
- B. Panasonic is endeavoring to continually improve the quality and reliability of these materials but there is always the possibility that further rectifications will be required in the future. Therefore, Panasonic will not assume any liability for any damages arising from any errors etc. that may appear in this material.
- C. These materials are solely intended for a customer's individual use.
Therefore, without the prior written approval of Panasonic, any other use such as reproducing, selling, or distributing this material to a third party, via the Internet or in any other way, is prohibited.