



DM54LS450A/DM74LS450 16:1 Multiplexer


General Description

The 16:1 Mux selects one of sixteen inputs, E0 through E15, specified by four binary inputs, A, B, C and D. The true data is output on Y and the inverted data on W. Propagation delays are the same for both inputs and addresses and are specified for 50 pF loading. Outputs conform to the standard 8 mA LS totem pole drive standard.

Features

- 24-pin SKINNYDIP saves space
- Similar to 74150 (Fat Dip)
- Low current PNP inputs reduce loading
- 15 ns typical propagation delay

Connection Diagram

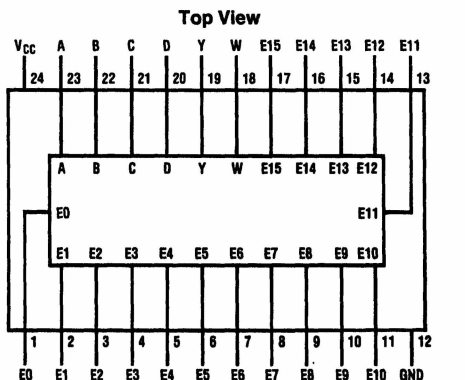

Order Number **DM54LS450AJ**, **DM74LS450AJ**,
DM74LS450AN or **DM74LS450AV**
 See NS Package Number
J24F, N24C or V28A

Function Table

Input Select				Output	
D	C	B	A	W	Y
L	L	L	L	$\overline{E0}$	E0
L	L	L	H	$\overline{E1}$	E1
L	L	H	L	$\overline{E2}$	E2
L	L	H	H	$\overline{E3}$	E3
L	H	L	L	$\overline{E4}$	E4
L	H	L	H	$\overline{E5}$	E5
L	H	H	L	$\overline{E6}$	E6
L	H	H	H	$\overline{E7}$	E7
H	L	L	L	$\overline{E8}$	E8
H	L	L	H	$\overline{E9}$	E9
H	L	H	L	$\overline{E10}$	E10
H	L	H	H	$\overline{E11}$	E11
H	H	L	L	$\overline{E12}$	E12
H	H	L	H	$\overline{E13}$	E13
H	H	H	L	$\overline{E14}$	E14
H	H	H	H	$\overline{E15}$	E15

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage V_{CC}	–0.5V to +7V (Note 2)
Input Voltage	–1.5V to +5.5V (Note 2)
Off-State Output Voltage	–1.5V to +5.5V (Note 2)
Input Current	–30.0 mA to +5.0 mA (Note 2)
Output Current (I_{OL})	+100 mA
Storage Temperature	–65°C to +150°C

Ambient Temperature with Power Applied	–65°C to +125°C
Junction Temperature with Power Applied	–65°C to +150°C
ESD Tolerance	2000V
CZAP = 100 pF	
RZAP = 1500Ω	
Test Method: Human Body Model	
Test Specification: NSC SOP-5-028	

Recommended Operating Conditions

Symbol	Parameter	Military			Commercial			Units
		Min	Nom	Max	Min	Nom	Max	
V_{CC}	Supply Voltage	4.5	5	5.5	4.75	5	5.25	V
T_A	Operating Free-Air Temperature	–55		125	0		75	°C

Electrical Characteristics Over Recommended Operating Conditions

Symbol	Parameter	Test Conditions			Min	Typ	Max	Units
V_{IL}	Low Level Input Voltage (Note 3)						0.8	V
V_{IH}	High Level Input Voltage (Note 3)				2			V
V_{IC}	Input Clamp Voltage	$V_{CC} = \text{Min}, I = -18 \text{ mA}$					–1.5	V
I_{IL}	Low Level Input Current	$V_{CC} = \text{Max}, V_I = 0.4 \text{ V}$					–0.25	mA
I_{IH}	High Level Input Current	$V_{CC} = \text{Max}, V_I = 2.4 \text{ V}$					25	μA
I_I	Maximum Input Current	$V_{CC} = \text{Max}, V_I = 5.5 \text{ V}$					1	mA
V_{OL}	Low Level Output Voltage	$V_{CC} = \text{Min}, I_{OL} = 8 \text{ mA}$					0.5	V
V_{OH}	High Level Output Voltage	$V_{CC} = \text{Min}$	$I_{OH} = -2 \text{ mA}$	MIL	2.4			V
			$I_{OH} = -3.2 \text{ mA}$	COM				
I_{OS}	Output Short-Circuit Current (Note 4)	$V_{CC} = 5 \text{ V}, V_O = 0 \text{ V}$			–30		–130	mA
I_{CC}	Supply Current	$V_{CC} = \text{Max}, \text{Outputs Open}$				60	100	mA

Note 1: Absolute maximum ratings are those values beyond which the device may be permanently damaged. Proper operation is not guaranteed outside the specified recommended operating conditions.

Note 2: Some device pins may be raised above these limits during programming operations according to the applicable specification.


Note 3: These are absolute voltages with respect to the ground pin on the device and include all overshoots due to system and/or tester noise. Do not attempt to test these values without suitable equipment.

Note 4: To avoid invalid readings in other parameter tests, it is preferable to conduct the I_{OS} test last. To minimize internal heating, only one output should be shorted at a time with maximum duration of 1.0 second each. Prolonged shorting of a high output may raise the chip temperature above normal and permanent damage may result.

Switching Characteristics Over Operating Conditions


Symbol	Parameter	Test Conditions	Military			Commercial			Units
			Min	Typ	Max	Min	Typ	Max	
T_{pd}	Input to Output	$C_L = 50 \text{ pF}$			35			30	ns

Test Load



TL/L/10228-2

Test Waveform

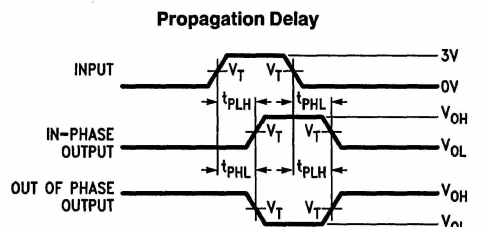


TL/L/10228-3

Notes:

 $V_T = 1.5V$ C_L includes probe and jig capacitance.

In the examples above, the phase relationships between inputs and outputs have been chosen arbitrarily.


Schematic of Inputs and Outputs

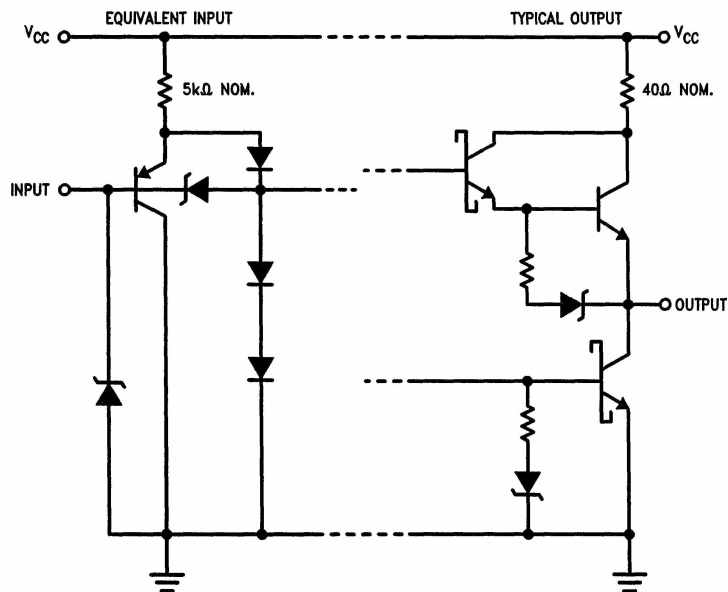

TL/L/10228-4

Logic Diagram

LS450A

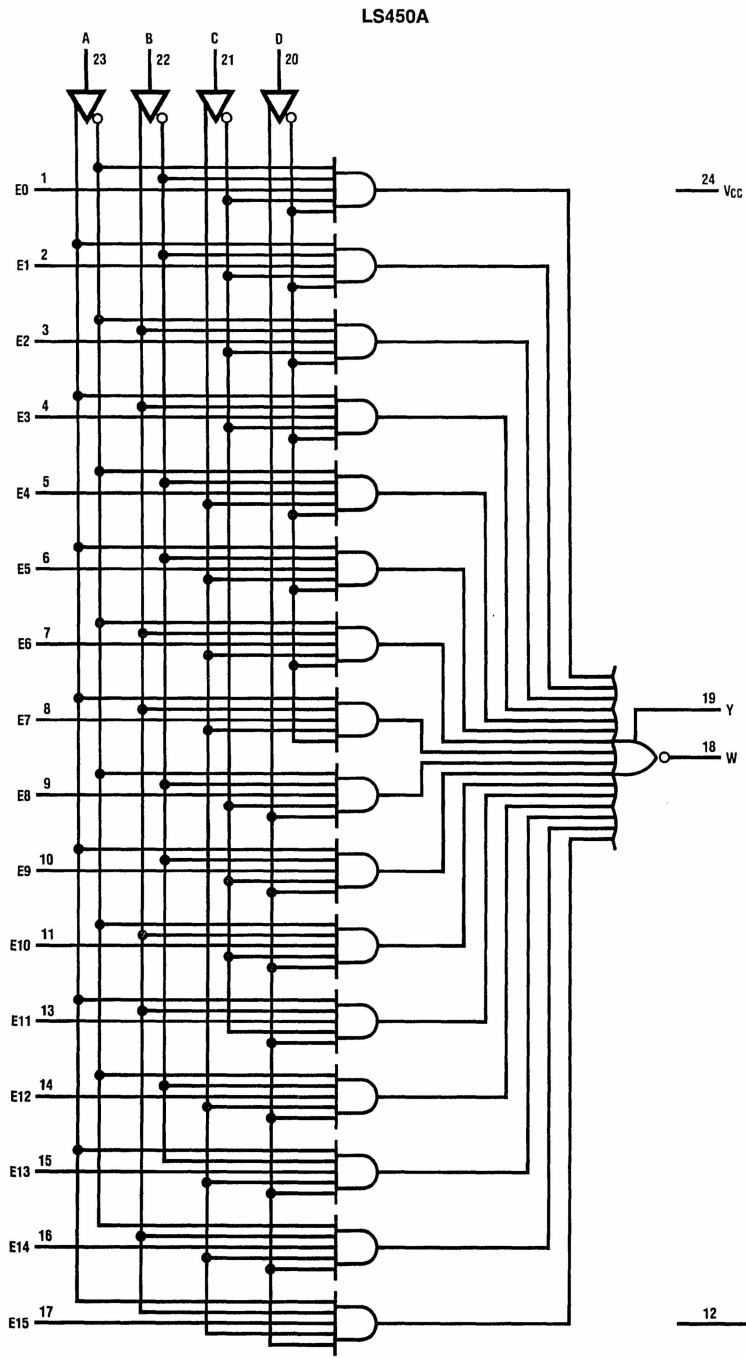

TL/L/1022B-5