

3-channel 8-bit D / A converter BU3618K

The BU3618K is an RGB 3-channel, 8-bit D / A converter CMOS IC featuring high speed and low power consumption. An internal reference voltage supply eliminates the need to provide an external reference voltage supply.


● Applications

Video-CDs, CD-Vs, CD karaoke sets

● Features

- 1) 8-bit resolution.
- 2) Current output model.
- 3) Low power consumption.
- 4) High-speed operation enabled.
- 5) Internal reference voltage supply.
- 6) TTL input.

● Block diagram

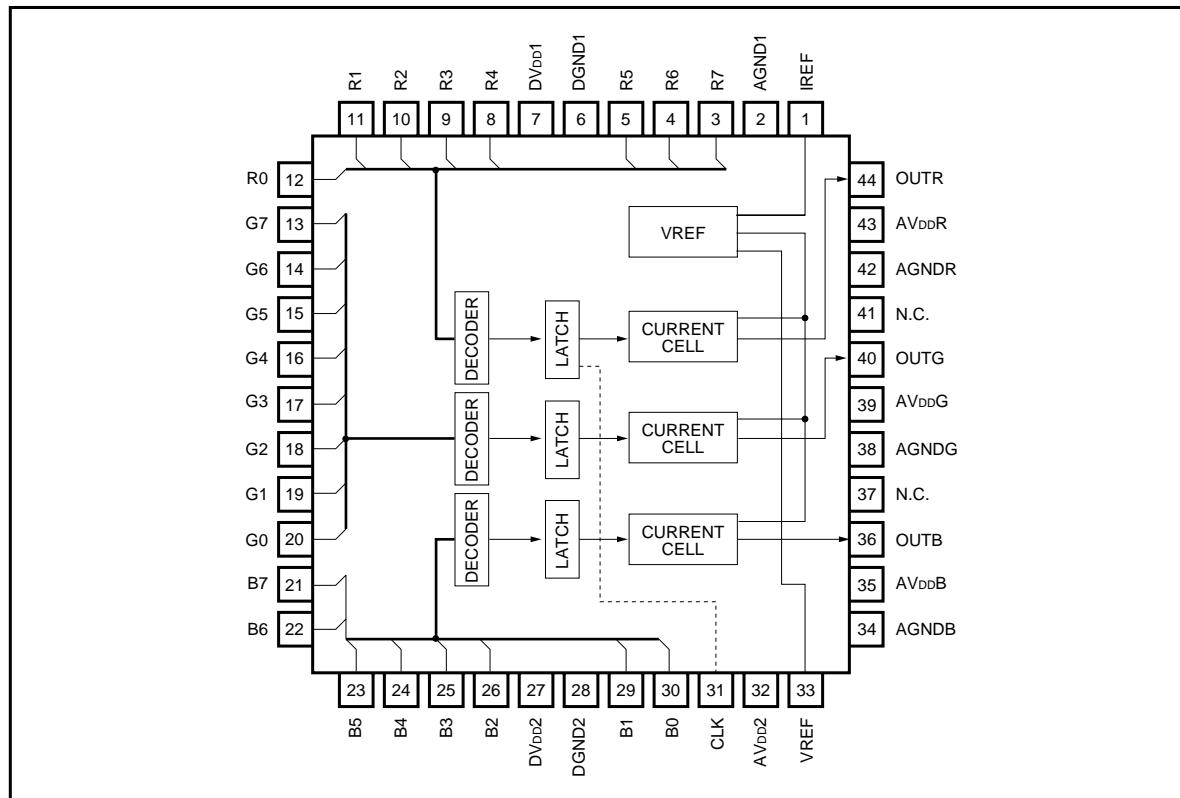

●Pin descriptions

Pin No.	I / O	Pin name	Function
1	—	IREF	For connection of output current adjustment resistor, VREF output
2	—	AGND1	Analog ground 1
3	I	R7	RED data input (bit 7, MSB)
4	I	R6	RED data input (bit 6)
5	I	R5	RED data input (bit 5)
6	—	DGND1	Digital ground 1
7	—	DV _{DD} 1	Digital power supply 1
8	I	R4	RED data input (bit 4)
9	I	R3	RED data input (bit 3)
10	I	R2	RED data input (bit 2)
11	I	R1	RED data input (bit 1)
12	I	R0	RED data input (bit 0, LSB)
13	I	G7	GREEN data input (bit 7, MSB)
14	I	G6	GREEN data input (bit 6)
15	I	G5	GREEN data input (bit 5)
16	I	G4	GREEN data input (bit 4)
17	I	G3	GREEN data input (bit 3)
18	I	G2	GREEN data input (bit 2)
19	I	G1	GREEN data input (bit 1)
20	I	G0	GREEN data input (bit 0, LSB)
21	I	B7	BLUE data input (bit 7, MSB)
22	I	B6	BLUE data input (bit 6)

Pin No.	I / O	Pin name	Function
23	I	B5	BLUE data input (bit 5)
24	I	B4	BLUE data input (bit 4)
25	I	B3	BLUE data input (bit 3)
26	I	B2	BLUE data input (bit 2)
27	—	DV _{DD} 2	Digital power supply 2
28	—	DGND2	Digital ground 2
29	I	B1	BLUE data input (bit 1)
30	I	B0	BLUE data input (bit 0, LSB)
31	I	CLK	System clock
32	—	AV _{DD} 2	Analog power supply 2
33	O	VREF	External capacitor connection pin (C = 0.1μF)
34	—	AGNDB	Analog ground B
35	—	AV _{DD} B	Analog power supply B
36	O	OUTB	BLUE output
37	—	N.C.	—
38	—	AGNDG	Analog ground G
39	—	AV _{DD} G	Analog power supply G
40	O	OUTG	GREEN output
41	—	N.C.	—
42	—	AGNDR	Analog ground R
43	—	AV _{DD} R	Analog power supply R
44	O	OUTR	RED output

● Application example

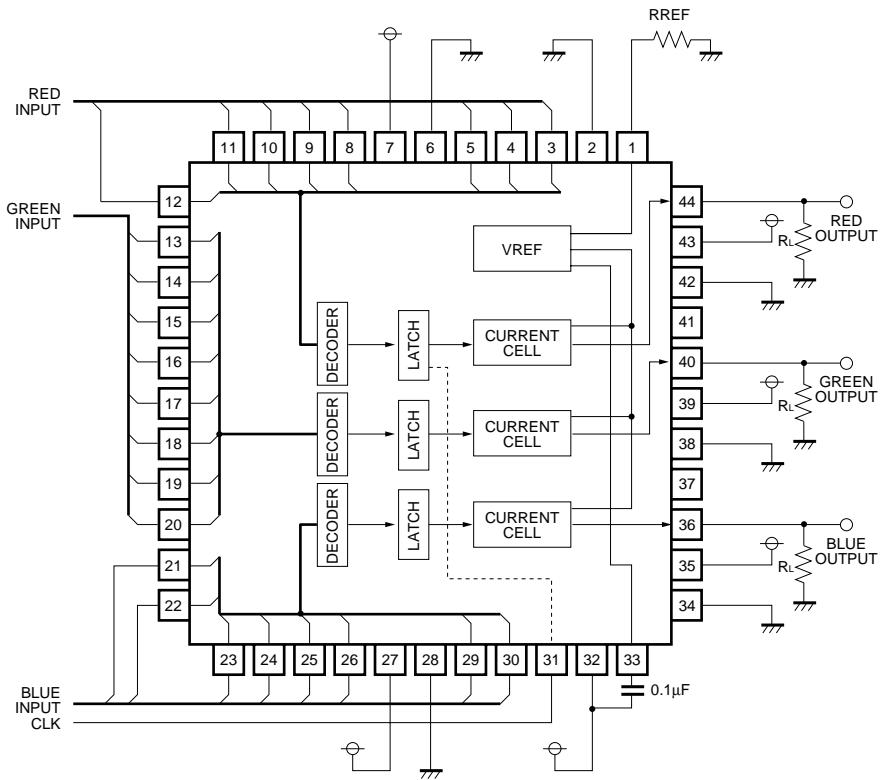
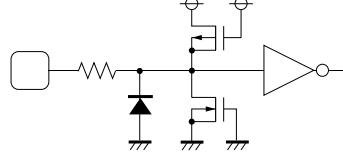
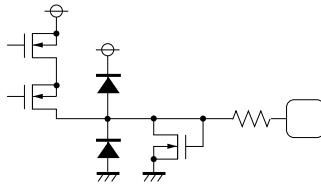
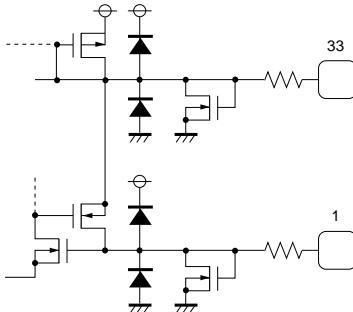


Fig. 1

● Input / output circuits

Pin No.	Pin name	Equivalent circuit
3 ~ 5 8 ~ 26 29 ~ 31	R0 ~ R7, G0 ~ G7 B0 ~ B7, CLK	
36, 40, 44	OUTR, OUTG OUTB	
1, 33	IREF, VREF	

● Circuit operation


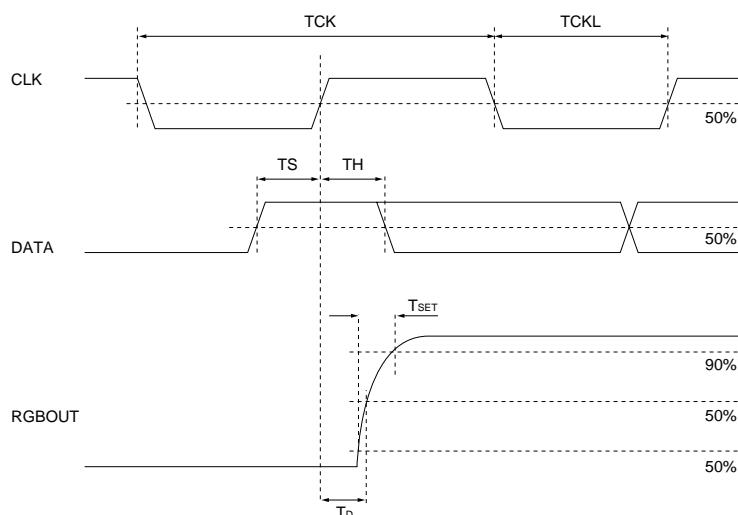


Fig. 2 Input / output interface timing

● External dimensions (Units: mm)



QFP44