

# LM3189

*LM3189 FM IF System*



Literature Number: SNOSBV8A

## LM3189 FM IF System

### General Description

The LM3189N is a monolithic integrated circuit that provides all the functions of a comprehensive FM IF system. The block diagram of the LM3189N includes a three stage FM IF amplifier/limiter configuration with level detectors for each stage, a doubly balanced quadrature FM detector and an audio amplifier that features the optional use of a muting (squelch) circuit.

The advanced circuit design of the IF system includes desirable deluxe features such as programmable delayed AGC for the RF tuner, an AFC drive circuit, and an output signal to drive a tuning meter and/or provide stereo switching logic. In addition, internal power supply regulators maintain a nearly constant current drain over the voltage supply range of +8.5V to +16V.

The LM3189N is ideal for high fidelity operation. Distortion in an LM3189N FM IF system is primarily a function of the phase linearity characteristic of the outboard detector coil.


The LM3189N has all the features of the LM3089N plus additions.

The LM3189N utilizes the 16-lead dual-in-line plastic package and can operate over the ambient temperature range of  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ .

### Features

- Exceptional limiting sensitivity:  $12\ \mu\text{V}$  typ at  $-3\ \text{dB}$  point
- Low distortion: 0.1% typ (with double-tuned coil)
- Single-coil tuning capability
- Improved (S + N)/N ratio
- Externally programmable recovered audio level
- Provides specific signal for control of inter-channel muting (squelch)
- Provides specific signal for direct drive of a tuning meter
- On channel step for search control
- Provides programmable AGC voltage for RF amplifier
- Provides a specific circuit for flexible audio output
- Internal supply voltage regulators
- Externally programmable ON channel step width, and deviation at which muting occurs

### Block Diagram

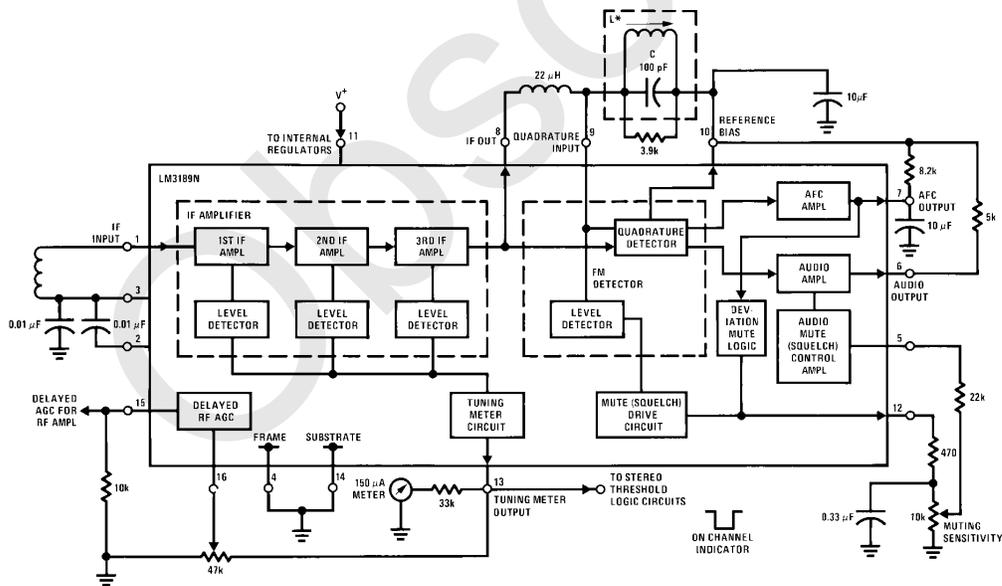

TL/H/7960-1

All resistance values are in  $\Omega$

\*L tunes with 100 pF (C) at 10.7 MHz,  $Q_0 \approx 75$   
(Toko No. KACS K586HM or equivalent)

## Absolute Maximum Ratings

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage Between Pin 11 and Pins 4, 14	16V
DC Current Out of Pin 12	5 mA
DC Current Out of Pin 13	5 mA
DC Current Out of Pin 15	2 mA

Power Dissipation (Note 2)	1500 mW
Operating Temperature Range	-40°C to +85°C
Storage Temperature Range	-65°C to +150°C
Lead Temperature (Soldering, 10 sec.)	260°C


## Electrical Characteristics $T_A = 25^\circ\text{C}$ , $V^+ = 12\text{V}$

Symbol	Parameter	Conditions (See Single-Tuned Test Circuit)	Min	Typ	Max	Units
<b>STATIC (DC) CHARACTERISTICS</b>						
$I_{11}$	Quiescent Circuit Current		20	31	44	mA
V1	DC Voltages:	No Signal Input, Non Muted				
V2	Terminal 1 (IF Input)		1.2	2.0	2.4	V
V3	Terminal 2 (AC Return to Input)		1.2	2.0	2.4	V
V15	Terminal 3 (DC Bias to Input)		1.2	2.0	2.4	V
V10	Terminal 15 (RF AGC)		7.5	9.5	11	V
	Terminal 10 (DC Reference)	5	5.75	6	V	
<b>DYNAMIC CHARACTERISTICS</b>						
$V_i(\text{lim})$	Input Limiting Voltage (-3 dB Point)			12	25	$\mu\text{V}$
AMR	AM Rejection (Term. 6)	$V_{IN} = 0.1\text{V}$	45	55		dB
$V_O(\text{AF})$	Recovered AF Voltage (Term. 6)	AM Mod. = 30%	325	500	650	mV
THD	Total Harmonic Distortion (Note 1) Single Tuned (Term. 6) Double Tuned (Term. 6)	$V_{IN} = 0.1\text{V}$		0.5 0.1	1	% %
S + N/N	Signal Plus Noise to Noise Ratio (Term. 6)		65	80		dB
$f_{DEV}$	Deviation Mute Frequency			$\pm 40$		kHz
V16	RF AGC Threshold			1.25		V
V12	On Channel Step	$V_{IN} = 0.1\text{V}$		0 5.6		V

**Note 1:** THD characteristics are essentially a function of the phase characteristics of the network connected between terminals 8, 9, and 10.

**Note 2:** For operation in ambient temperatures above 25°C, the device must be derated based on a 150°C maximum junction temperature and a thermal resistance of 80°C/W junction to ambient.

## Connection Diagram

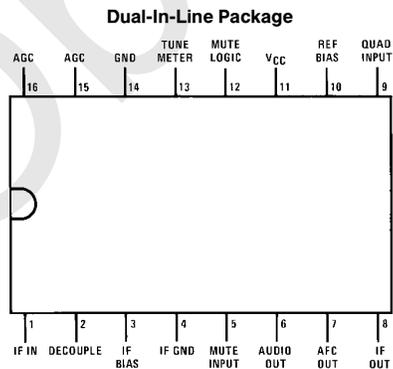

TL/H/7960-2


**Top View**

**Order Number LM3189N  
See NS Package Number N16E**

## Test Circuits

### Test Circuit for LM3189N Using a Single-Tuned Detector Coil


- All resistance values are in  $\Omega$
- \*L tunes with 100 pF (C) at 10.7 MHz,  
 $Q_0(\text{unloaded}) \approx 75$  (Toko No. KACS K586HM or equivalent)
  - \*\*C = 0.01  $\mu\text{F}$  for 50  $\mu\text{s}$  de-emphasis (Europe)  
 = 0.015  $\mu\text{F}$  for 75  $\mu\text{s}$  de-emphasis (USA)

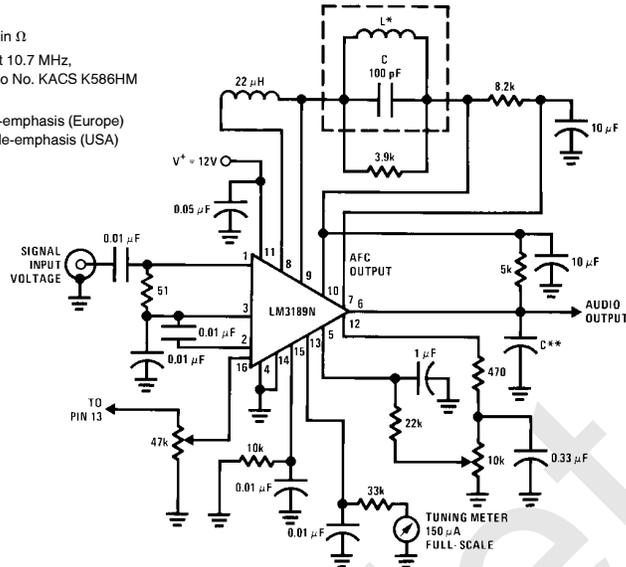

TL/H/7960-3

### Test Circuit for LM3189N Using a Double-Tuned Detector Coil

- All resistance values are in  $\Omega$
- \*T:PRI— $Q_0(\text{unloaded}) \approx 75$  (tunes with 100 pF (C12)) 20t of 34e on 7/32" dia form
  - SEC— $Q_0(\text{unloaded}) \approx 75$  (tunes with 100 pF (C2)) 20t of 34e on 7/32" dia form
  - kQ(percent of critical coupling)  $\approx 70\%$   
 (adjusted for coil voltage ( $V_C$ ) = 150 mV)
  - Above values permit proper operation of mute (squelch) circuit "E" type slugs, spacing 4 mm
  - \*\*C = 0.01  $\mu\text{F}$  for 50  $\mu\text{s}$  de-emphasis (Europe)  
 = 0.015  $\mu\text{F}$  for 75  $\mu\text{s}$  de-emphasis (USA)

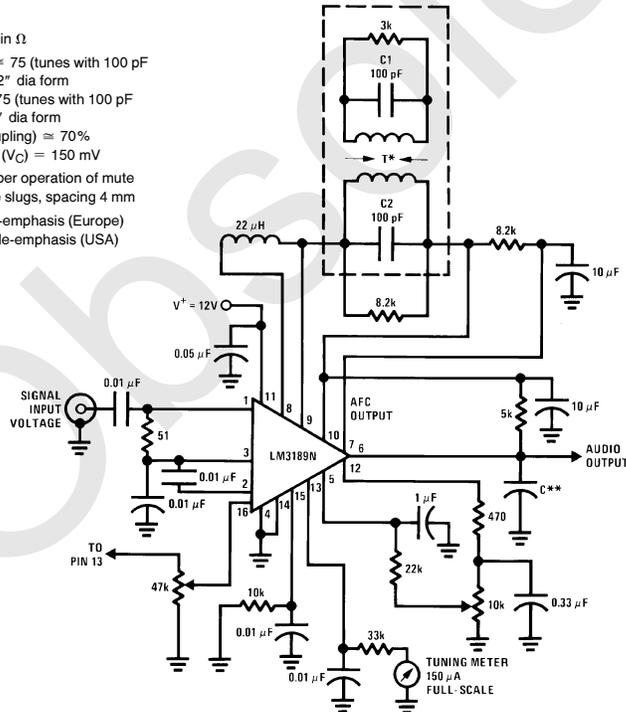


TL/H/7960-4




# Typical Performance Characteristics


**AM Rejection (30% Mod) vs IF Input Signal**

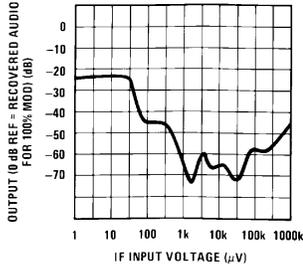


**Mute Control Output (Pin 12) vs IF Input Signal**

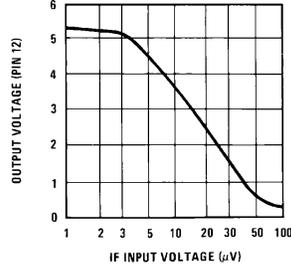


**Typical Audio Attenuation (Pin 6) vs Mute Input Voltage (Pin 5)**

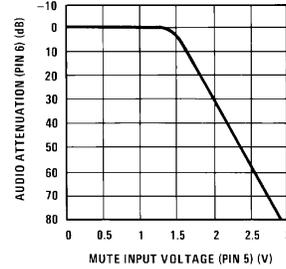


**Muting Action, Tuner AGC, and Tuning Meter Output as a Function of Input Signal Voltage**

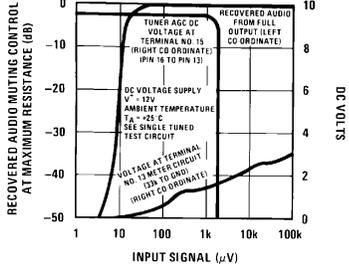


**AFC Characteristics (Current at Term 7 as a Function of Change in Frequency)**

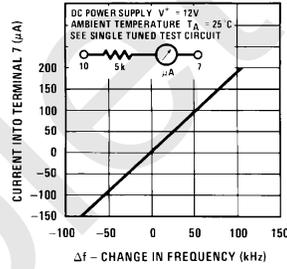

**Deviation Mute Threshold as a Function of Load Resistance (Between Term 7 and Term 10)**

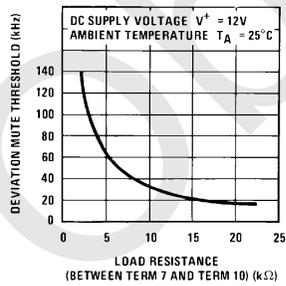


**Typical Limiting and Noise Characteristics**

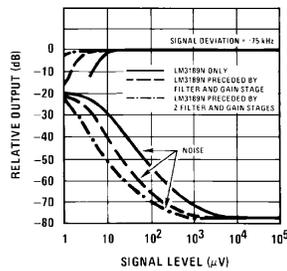

TL/H/7960-7


# Schematic Diagram

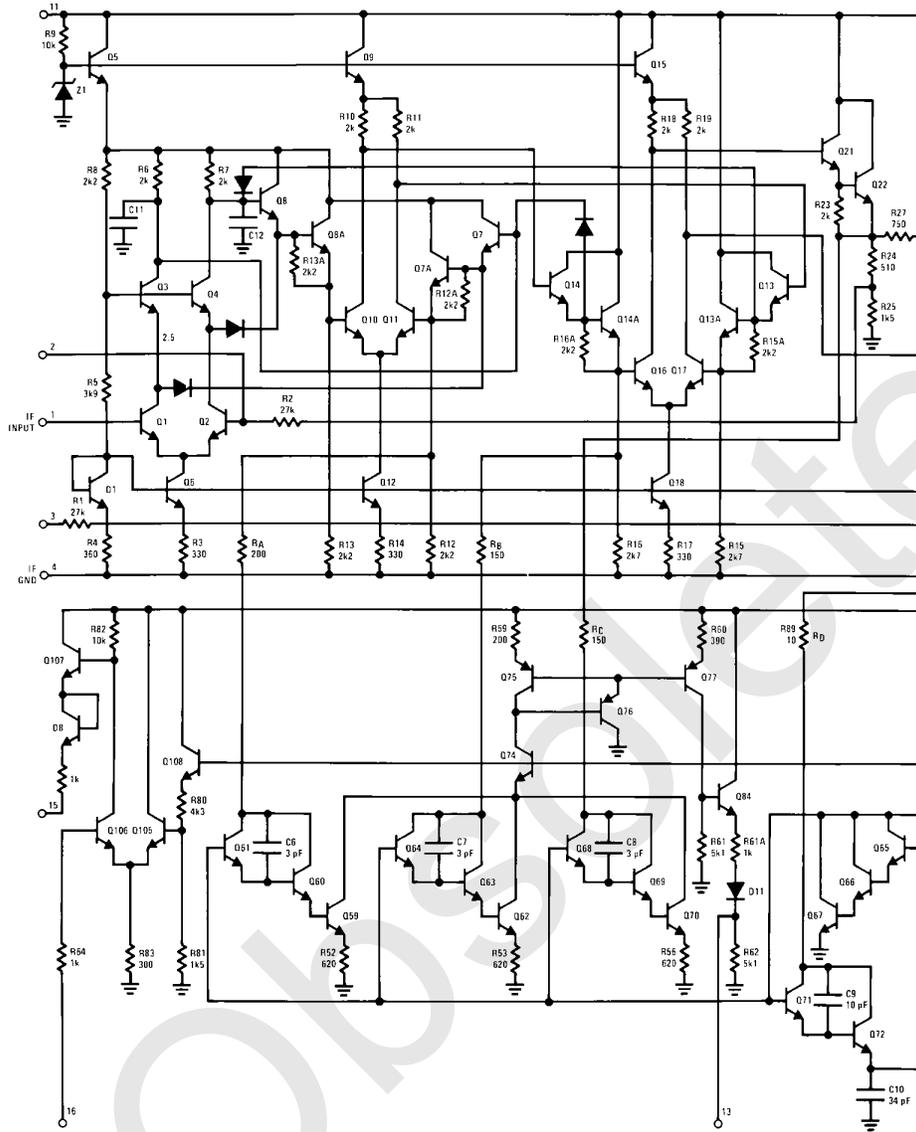

TL/H/7960-8



**Physical Dimensions** inches (millimeters)

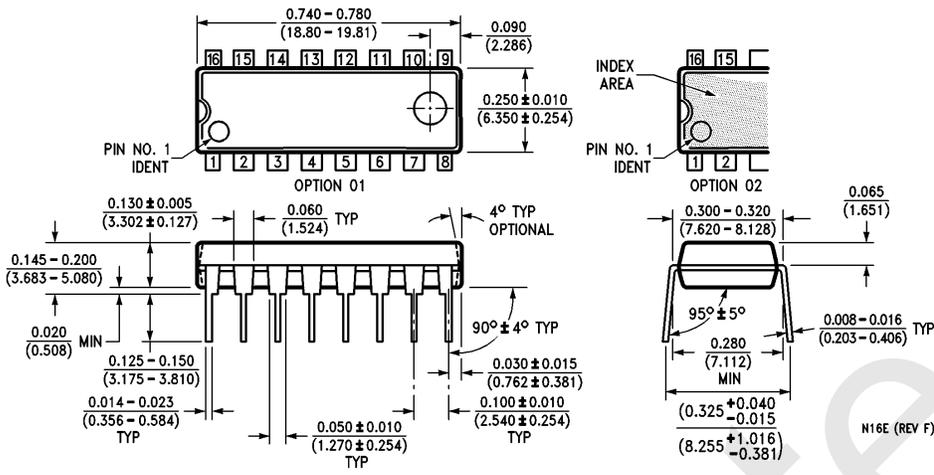

**Dual-In-Line Package (N)**  
**Order Number LM3189N**  
**See NS Package Number N16E**

**LIFE SUPPORT POLICY**

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



**National Semiconductor Corporation**  
 1111 West Bardin Road  
 Arlington, TX 76017  
 Tel: 1(800) 272-9959  
 Fax: 1(800) 737-7018

**National Semiconductor Europe**  
 Fax: (+49) 0-180-530 85 86  
 Email: cnjwge@tevm2.nsc.com  
 Deutsch Tel: (+49) 0-180-530 85 85  
 English Tel: (+49) 0-180-532 78 32  
 Français Tel: (+49) 0-180-532 93 58  
 Italiano Tel: (+49) 0-180-534 16 80

**National Semiconductor Hong Kong Ltd.**  
 19th Floor, Straight Block,  
 Ocean Centre, 5 Canton Rd.  
 Tsimshatsui, Kowloon  
 Hong Kong  
 Tel: (852) 2737-1600  
 Fax: (852) 2736-9960

**National Semiconductor Japan Ltd.**  
 Tel: 81-043-299-2309  
 Fax: 81-043-299-2408

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

### Products

Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>
DLP® Products	<a href="http://www.dlp.com">www.dlp.com</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>
Clocks and Timers	<a href="http://www.ti.com/clocks">www.ti.com/clocks</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>
OMAP Mobile Processors	<a href="http://www.ti.com/omap">www.ti.com/omap</a>
Wireless Connectivity	<a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a>

### Applications

Communications and Telecom	<a href="http://www.ti.com/communications">www.ti.com/communications</a>
Computers and Peripherals	<a href="http://www.ti.com/computers">www.ti.com/computers</a>
Consumer Electronics	<a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>
Energy and Lighting	<a href="http://www.ti.com/energy">www.ti.com/energy</a>
Industrial	<a href="http://www.ti.com/industrial">www.ti.com/industrial</a>
Medical	<a href="http://www.ti.com/medical">www.ti.com/medical</a>
Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
Space, Avionics and Defense	<a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a>
Transportation and Automotive	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
Video and Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>

TI E2E Community Home Page

[e2e.ti.com](http://e2e.ti.com)

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2011, Texas Instruments Incorporated