

New Jersey Semi-Conductor Products, Inc.

20 STERN AVE.
SPRINGFIELD, NEW JERSEY 07081
U.S.A.


TELEPHONE: (201) 376-2922
(212) 227-6005
FAX: (201) 376-8960

TC ZENER DIODES

400 mW & 500 mW, TC

Type	Zener Voltage Min.	Zener Voltage Max.	Test Current	Maximum Dynamic Impedance	Voltage Temperature Stability	Temperature Range	Typical Temperature Coefficient
	V_z	V_z	I_zT	$Z_{zT} \text{ at } I_{zT}$	$\Delta V_{zT} \text{ Max.}$ mV	°C	%/°C
1N940	8.55	9.45	7.5	20	1.3	0 to + 75	
1N940A					2.7	-55 to +100	
1N940B					3.7	-55 to +150	0.0002

‡Zener impedance is derived from the 1kHz voltage created when AC current with RMS value of 10% of DC zener test current is superimposed on the test current.

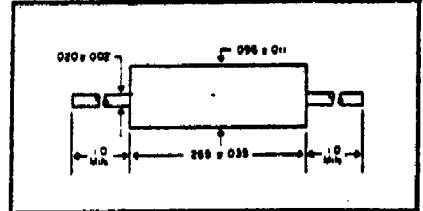

400 mW & 500 mW, TC

DO-7 Case

Type	Zener Voltage Min.	Zener Voltage Max.	Test Current	Maximum Dynamic Impedance	Voltage Temperature Stability	Temperature Range	Typical Temperature Coefficient
	V_z	V_z	I_zT	$Z_{zT} \text{ at } I_{zT}$	$\Delta V_{zT} \text{ Max.}$ mV	°C	%/°C
1N941	11.12	12.28	7.5	30	88	0 to + 75	
1N941A					181	-55 to +100	.01
1N941B					239	-55 to +150	
1N942	11.12	12.28	7.5	30	44	0 to + 75	
1N942A					90	-55 to +100	.005
1N942B					120	-55 to +150	
1N943	11.12	12.28	7.5	30	18	0 to + 75	
1N943A					36	-55 to +100	.002
1N943B					47	-55 to +150	
1N944	11.12	12.28	7.5	30	9	0 to + 75	
1N944A					18	-55 to +100	.001
1N944B					24	-55 to +150	
1N945	11.12	12.28	7.5	30	4	0 to + 75	
1N945A					9	-55 to +100	.0005
1N945B					12	-55 to +150	
1N946	11.12	12.28	7.5	30	20	0 to + 75	
1N946A						-55 to +100	.0005
1N946B						-55 to +150	


‡Zener impedance is derived from the 1kHz voltage created when AC current with RMS value of 10% of DC zener test current is superimposed on the test current.

400 mW & 500 mW, TC

DO-7 Case

Type	Zener Voltage Min.	Zener Voltage Max.	Test Current	Maximum Dynamic Impedance	Voltage Temperature Stability	Temperature Range	Typical Temperature Coefficient
	V_z	V_z	I_zT	$Z_{zT} \text{ at } I_{zT}$	$\Delta V_{zT} \text{ Max.}$ mV	°C	%/°C
1N3154	8.0	8.8	10	15	130	-55 to +100	.01
1N3154A					172	-55 to +150	.01
1N3155					65	-55 to +100	.005
1N3155A					88	-55 to +150	.005
1N3158	8.0	8.8	10	15	28	-55 to +100	.002
1N3156A					34	-55 to +150	.002
1N3157					13	-55 to +100	.001
1N3157A					17	-55 to +150	.001

‡Zener impedance is derived from the 1kHz voltage created when AC current with RMS value of 10% of DC zener test current is superimposed on the test current.



Quality Semi-Conductors