Emitter common (dual digital transistors) UMA9N / FMA9A


Features

- Two DTA114E chips in a UMT or SMT package.
- Mounting cost and area can be cut in half.
- StructureEpitaxial planar type

PNP silicon transistor (Built-in resistor type)

The following characteristics apply to both DTr₁ and DTr₂.

External dimensions (Units: mm)

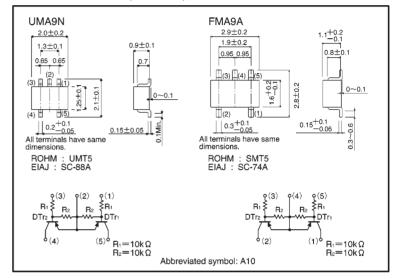

● Absolute maximum ratings (Ta = 25°C)

| Parameter | | Symbol | Limits | Unit | |
|----------------------|-------|-----------|-----------------------|-------|--|
| Supply voltage | | Vcc | -50 | V | |
| Input voltage | | Vin | -40 | V | |
| | | VIN | 10 | | |
| Output current | | lo | -50 | mA | |
| | | Ic (Max.) | -100 | | |
| Power dissipation | UMA9N | Pd | 150(TOTAL) | mW *1 | |
| | FMA9A | Fu | 300 (TOTAL) | *2 | |
| Junction temperature | | Tj | 150 | င | |
| Storage temperature | | Tstg | -50~ + 150 | °C | |

*1 120mW per element must not be exceeded.

*2 200mW per element must not be exceeded.

Transistors UMA9N/FMA9A

• Electrical characteristics (Ta = 25°C)

| Parameter | Symbol | Min. | Тур. | Max. | Unit | Conditions |
|----------------------|----------------|------|------|-------|------|-------------------------------|
| Input voltage | VI (off) | _ | _ | -0.5 | ٧ | Vcc=-5V, lo=-100 μ A |
| | VI (on) | -3.0 | _ | _ | | Vo=-0.3V, Io=-20mA |
| Output voltage | Vo(on) | _ | -0.1 | -0.3 | V | Io/Ii=-10mA/-0.5mA |
| Input current | lı | _ | _ | -0.88 | mA | V _I =-5V |
| Output current | lo(off) | _ | _ | -0.5 | μΑ | Vcc=-50V, Vi=0V |
| DC current gain | Gı | 30 | _ | _ | _ | Io=-5mA, Vo=-5V |
| Transition frequency | fτ | _ | 250 | _ | MHz | Vce=-10mA, Ie=5mA, f=100MHZ * |
| Input resistance | R ₁ | 7 | 10 | 13 | kΩ | _ |
| Resistance ratio | R2/R1 | 0.8 | 1 | 1.2 | _ | _ |

^{*} Transition frequency of the device

Packaging specifications

| | Packaging type | Taping | |
|----------|------------------------------|--------|------|
| | Code | TR | T148 |
| Part No. | Basic ordering unit (pieces) | 3000 | 3000 |
| UMA9N | | 0 | _ |
| FMA9A | | _ | 0 |

Electrical characteristic curves




Fig.1 Input voltage vs. output current (ON characteristics)




Fig.2 Output current vs. input voltage (OFF characteristics)




Fig.3 DC current gain vs. output current




Fig.4 Output voltage vs. output current