



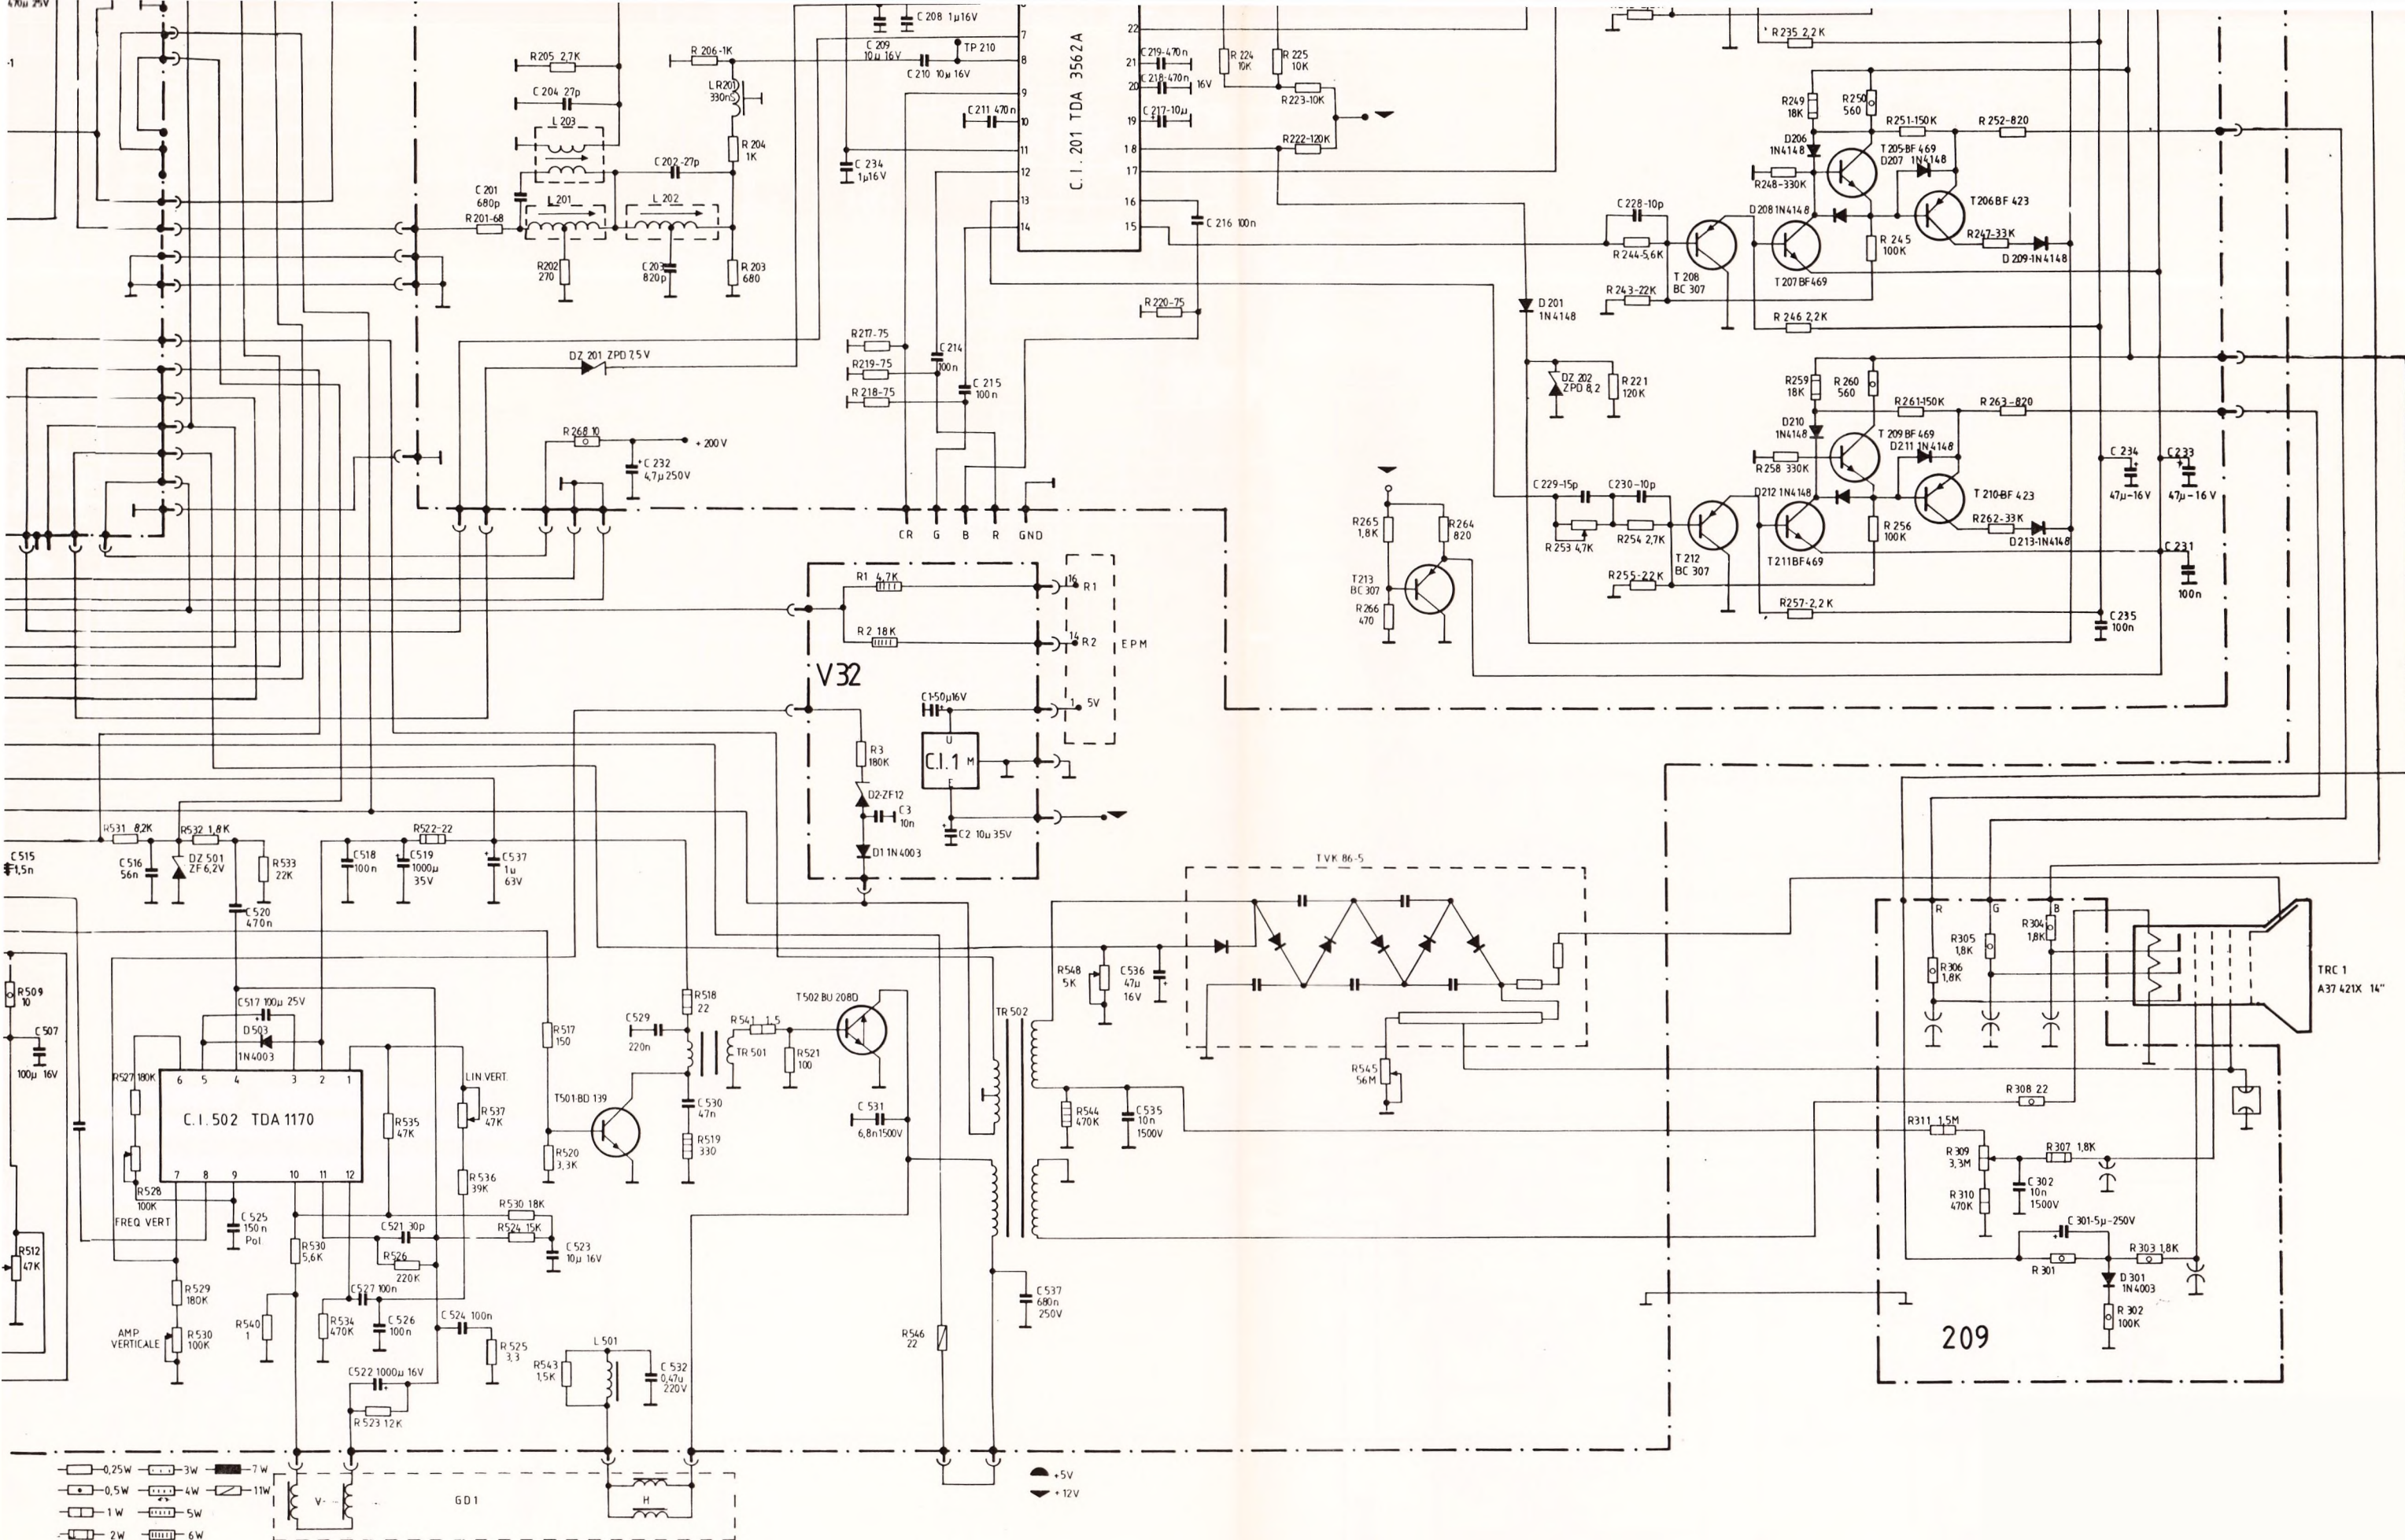

	TRANSISTORS	
BC 238	Si; NPN; Uni; 30V; 0.1A; 0.3W; 250MHz	BC 548
BC 307	Si; PNP; Uni; 50V; 0.1A; 0.3W; 130MHz	BC 557
BC 327	Si; PNP; NF-Tr; 50V; 0.8A; 0.625W; 100 MHz	BC 638
BD 139	Si; NPN; NF-L; 100V; 1.5A; 12.5W	BD 230
BF 259	Si; NPN; Vid; 300V; 0.1A; 0.8W; 90 MHz	
BF423	Si; PNP; Vid; 250V; 0.02A; 0.83W; 60MHz	BF 436
BF 469	Si; NPN; Vid-L 250V; 0.03A; 2W; 60MHz	BF458
BU 208A	Si; NPN; CTV-HA; 1500/700V; 5A; 12.5W	BU508A 2SD 350
BU 208D	≡ BU 208 + integr. Damper – Diode	
BSX 93	Si; NPN; FAST SWITCH; 40V; 0.15A; 0.36W; <12/15n; B>40	

ABBREVIATIONS:

- B - DC forward current gain
- Uni - general purpose,
- NF-Tr - audio frequency-driver

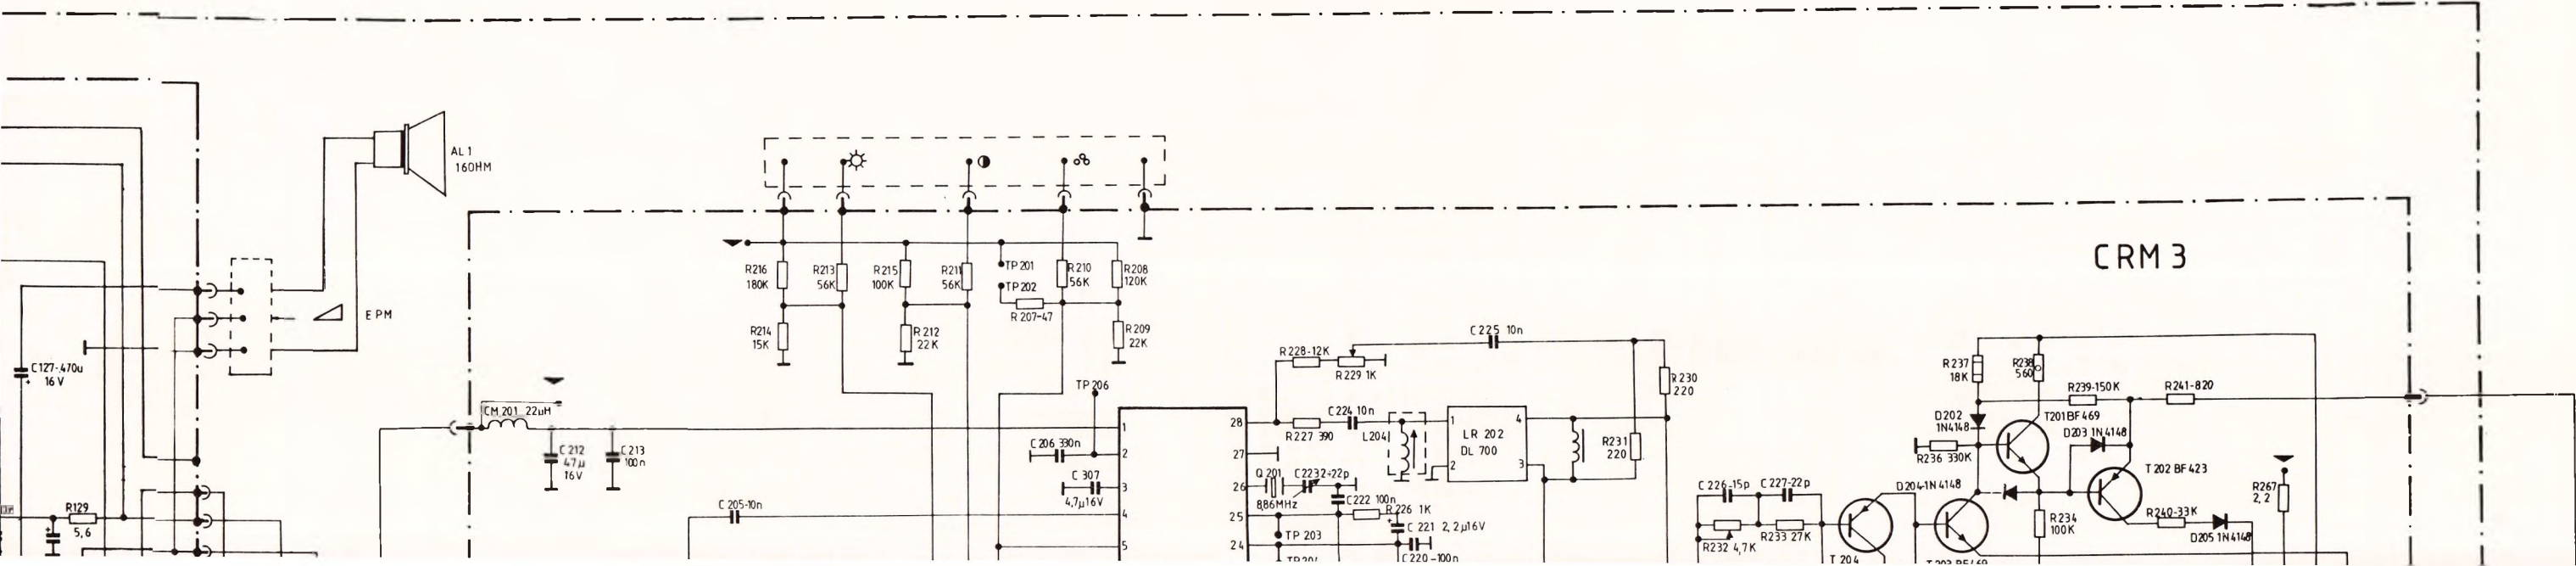

LIST OF DIODES AND TRANSISTORS

TYPE	SHORT DESCRIPTION; DATA	EQUALENENTS
BY 218...	Si; RECT; S; 100÷800V; 2A <200ns	BYW 33 36 BYT 77 78
BY 299	Si; TV RECT; 1000V; 2A; <500ns	BY 228
PLR 816	Si; RECT; S; 600V; 1A; <300ns	BY 201/....
ZF 2,7÷33V	ZENER DIODE; 2,7÷33V; 5%; 0.4 W	
ZPD 2,7÷51	ZENER DIODE 2,7÷51V; 5%; 0.5W	
ZTK 33B	IC-STAB-TUNER 33V	
1N4001÷7	Si; RECT; 50÷1000V; 1A	
1N 4148	Si; FAST SWITCH; 100V; 0.2 A; 4 ns	

