



DS1691A/DS3691 (RS-422/RS-423) Line Drivers with TRI-STATE® Outputs

General Description

The DS1691A/DS3691 are low power Schottky TTL line drivers designed to meet the requirements of EIA standards RS-422 and RS-423. They feature 4 buffered outputs with high source and sink current capability with internal short circuit protection. A mode control input provides a choice of operation either as 4 single-ended line drivers or 2 differential line drivers. A rise time control pin allows the use of an external capacitor to slow the rise time for suppression of near end crosstalk to other receivers in the cable. Rise time capacitors are primarily intended for waveshaping output signals in the single-ended driver mode. Multipoint applications in differential mode with waveshaping capacitors is not allowed.


With the mode select pin low, the DS1691A/DS3691 are dual-differential line drivers with TRI-STATE outputs. They feature $\pm 10V$ output common-mode range in TRI-STATE mode and 0V output unbalance when operated with $\pm 5V$ supply.

Features

- Dual RS-422 line driver with mode pin low, or quad RS-423 line driver with mode pin high
 - TRI-STATE outputs in RS-422 mode
 - Short circuit protection for both source and sink outputs
 - Outputs will not clamp line with power off or in TRI-STATE
 - 100 Ω transmission line drive capability
 - Low I_{CC} and I_{EE} power consumption
- | | |
|--------|--------------------------------------|
| RS-422 | $I_{CC} = 9 \text{ mA/driver typ}$ |
| RS-423 | $I_{CC} = 4.5 \text{ mA/driver typ}$ |
| | $I_{EE} = 2.5 \text{ mA/driver typ}$ |
- Low current PNP inputs compatible with TTL, MOS and CMOS
 - Pin compatible with AM26LS30

Connection Diagrams


With Mode Select LOW
(RS-422 Connection)

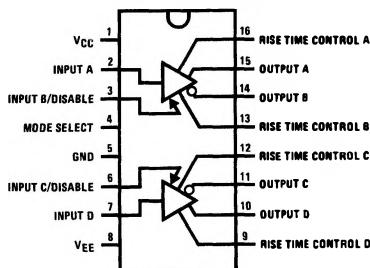

Top View

TL/F/5783-1

With Mode Select HIGH
(RS-423 Connection)

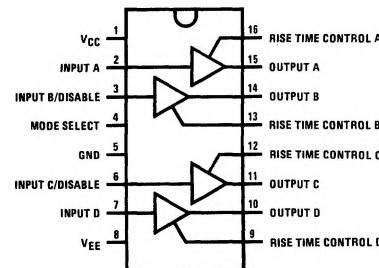

Top View

TL/F/5783-2

Truth Table


Operation	Inputs			Outputs	
	Mode	A (D)	B (C)	A (D)	B (C)
RS-422	0	0	0	0	1
	0	0	1	TRI-STATE	TRI-STATE
	0	1	0	1	0
	0	1	1	TRI-STATE	TRI-STATE
RS-423	1	0	0	0	0
	1	0	1	0	1
	1	1	0	1	0
	1	1	1	1	1

Order Number DS1691AJ, DS3691J,
DS3691M, DS3691N or DS3691V

See NS Package Number J16A, M16A, N16A or V20A
For Complete Military 883 Specifications,
see RETS Data Sheet

Order Number DS1691AJ/883

See NS Package Number J16A

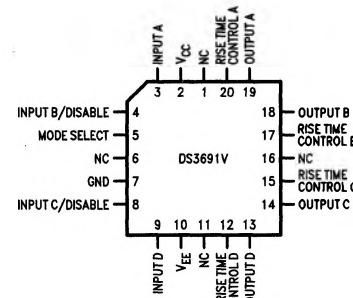

Top View

TL/F/5783-18

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage

V _{CC}	7V
V _{EE}	-7V

Maximum Power Dissipation* at 25°C

Cavity Package	1509 mW
Molded DIP Package	1476 mW
SO Package	1051 mW

Input Voltage

Input Voltage	15V
---------------	-----

Output Voltage (Power OFF)

Output Voltage (Power OFF)	± 15V
----------------------------	-------

Storage Temperature

-65°C to + 150°C

Lead Temperature (Soldering, 4 seconds)

260°C

*Derate cavity package 10.1 mW/°C above 25°C; derate molded DIP package 11.9 mW/°C above 25°C. Derate SO package 8.41 mW/°C above 25°C.

Operating Conditions

	Min	Max	Units
Supply Voltage DS1691A			
V _{CC}	4.5	5.5	V
V _{EE}	-4.5	-5.5	V
DS3691			
V _{CC}	4.75	5.25	V
V _{EE}	-4.75	-5.25	V
Temperature (T _A)			
DS1691A	-55	+ 125	°C
DS3691	0	+ 70	°C

DC Electrical Characteristics (Notes 2, 3, 4 and 5)

Symbol	Parameter	Conditions		Min	Typ	Max	Units
RS-422 CONNECTION, V_{EE} CONNECTION TO GROUND, MODE SELECT ≤ 0.8V							
V _{IH}	High Level Input Voltage			2			V
V _{IL}	Low Level Input Voltage					0.8	V
I _{IH}	High Level Input Current	V _{IN} = 2.4V			1	40	μA
		V _{IN} ≤ 15V			10	100	μA
I _{IL}	Low Level Input Current	V _{IN} = 0.4V			-30	-200	μA
V _I	Input Clamp Voltage	I _{IN} = - 12 mA				-1.5	V
V _O / V _O	Differential Output Voltage V _{A,B}	R _L = ∞	V _{IN} = 2V		3.6	6.0	V
			V _{IN} = 0.8V		-3.6	-6.0	V
V _T / V _T	Differential Output Voltage V _{A,B}	R _L = 100Ω V _{CC} ≥ 4.75V	V _{IN} = 2V	2	2.4		V
			V _{IN} = 0.8V	-2	-2.4		V
V _{OS} , V _{OS}	Common-Mode Offset Voltage	R _L = 100Ω			2.5	3	V
V _T - V _T	Difference in Differential Output Voltage	R _L = 100Ω			0.05	0.4	V
V _{OS} - V _{OS}	Difference in Common-Mode Offset Voltage	R _L = 100Ω			0.05	0.4	V
V _{SS}	V _T - V _T	R _L = 100Ω, V _{CC} ≥ 4.75V		4.0	4.8		V
V _{CMR}	Output Voltage Common-Mode Range	V _{DISABLE} = 2.4V		± 10			V
I _X A	Output Leakage Current Power OFF	V _{CC} = 0V	V _{CMR} = 10V			100	μA
			V _{CMR} = -10V			-100	μA
I _{OX}	TRI-STATE Output Current	V _{CC} = Max V _{EE} = 0V and -5V	V _{CMR} ≤ 10V			100	μA
			V _{CMR} ≥ -10V			-100	μA
I _{SA}	Output Short Circuit Current	V _{IN} = 0.4V	V _{OA} = 6V		80	150	mA
			V _{OB} = 0V		-80	-150	mA
I _{SB}	Output Short Circuit Current	V _{IN} = 2.4V	V _{OA} = 0V		-80	-150	mA
			V _{OB} = 6V		80	150	mA
I _{CC}	Supply Current				18	30	mA

AC Electrical Characteristics $T_A = 25^\circ\text{C}$ (Note 5)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
RS-422 CONNECTION, $V_{CC} = 5\text{V}$, MODE SELECT = 0.8V						
t_r	Output Rise Time	$R_L = 100\Omega$, $C_L = 500\text{ pF}$ (Figure 1)		120	200	ns
t_f	Output Fall Time	$R_L = 100\Omega$, $C_L = 500\text{ pF}$ (Figure 1)		120	200	ns
t_{PDH}	Output Propagation Delay	$R_L = 100\Omega$, $C_L = 500\text{ pF}$ (Figure 1)		120	200	ns
t_{PDL}	Output Propagation Delay	$R_L = 100\Omega$, $C_L = 500\text{ pF}$ (Figure 1)		120	200	ns
t_{PZL}	TRI-STATE Delay	$R_L = 450\Omega$, $C_L = 500\text{ pF}$, $C_C = 0\text{ pF}$ (Figure 4)		250	350	ns
t_{PZH}	TRI-STATE Delay	$R_L = 450\Omega$, $C_L = 500\text{ pF}$, $C_C = 0\text{ pF}$ (Figure 4)		180	300	ns
t_{PLZ}	TRI-STATE Delay	$R_L = 450\Omega$, $C_L = 500\text{ pF}$, $C_C = 0\text{ pF}$ (Figure 4)		180	300	ns
t_{PHZ}	TRI-STATE Delay	$R_L = 450\Omega$, $C_L = 500\text{ pF}$, $C_C = 0\text{ pF}$ (Figure 4)		250	350	ns

DC Electrical Characteristics (Notes 2, 3, 4 and 5)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
RS-423 CONNECTION, $V_{CC} = V_{EE}$, MODE SELECT $\geq 2\text{V}$						
V_{IH}	High Level Input Voltage		2			V
V_{IL}	Low Level Input Voltage				0.8	V
I_{IH}	High Level Input Current	$V_{IN} = 2.4\text{V}$		1	40	μA
		$V_{IN} \leq 15\text{V}$		10	100	μA
I_{IL}	Low Level Input Current	$V_{IN} = 0.4\text{V}$		-30	-200	μA
V_I	Input Clamp Voltage	$I_{IN} = -12\text{ mA}$			-1.5	V
V_O	Output Voltage	$R_L = \infty$, (Note 6) $V_{CC} \geq 4.75\text{V}$	$V_{IN} = 2\text{V}$	4.0	4.4	6.0
\bar{V}_O			$V_{IN} = 0.4\text{V}$	-4.0	-4.4	-6.0
V_T	Output Voltage	$R_L = 450\Omega$ $V_{CC} \geq 4.75\text{V}$	$V_{IN} = 2.4\text{V}$	3.6	4.1	V
\bar{V}_T			$V_{IN} = 0.4\text{V}$	-3.6	-4.1	V
$ V_T - \bar{V}_T $	Output Unbalance	$ V_{CC} = V_{EE} = 4.75\text{V}$, $R_L = 450\Omega$		0.02	0.4	V
I_{x^+}	Output Leakage Power OFF	$V_{CC} = V_{EE} = 0\text{V}$	$V_O = 6\text{V}$		2	100
I_{x^-}	Output Leakage Power OFF	$V_{CC} = V_{EE} = 0\text{V}$	$V_O = -6\text{V}$		-2	-100
I_{s^+}	Output Short Circuit Current	$V_O = 0\text{V}$	$V_{IN} = 2.4\text{V}$		-80	-150
I_{s^-}	Output Short Circuit Current	$V_O = 0\text{V}$	$V_{IN} = 0.4\text{V}$		80	150
I_{SLEW}	Slew Control Current				± 140	μA
I_{CC}	Positive Supply Current	$V_{IN} = 0.4\text{V}$, $R_L = \infty$		18	30	mA
I_{EE}	Negative Supply Current	$V_{IN} = 0.4\text{V}$, $R_L = \infty$		-10	-22	mA

Note 1: "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. They are not meant to imply that the devices should be operated at these limits. The tables of "Electrical Characteristics" provide conditions for actual device operation.

Note 2: Unless otherwise specified, min/max limits apply across the -55°C to $+125^\circ\text{C}$ temperature range for the DS1691A and across the 0°C to $+70^\circ\text{C}$ range for the DS3691. All typicals are given for $V_{CC} = 5\text{V}$ and $T_A = 25^\circ\text{C}$, V_{CC} and V_{EE} as listed in operating conditions.

Note 3: All currents into device pins are positive; all currents out of device pins are negative. All voltages are referenced to ground unless otherwise specified.

Note 4: Only one output at a time should be shorted.

Note 5: Symbols and definitions correspond to EIA RS-422 and/or RS-423 where applicable.

Note 6: At -55°C , the output voltage is $+3.9\text{V}$ minimum and -3.9V minimum.

AC Electrical Characteristics $T_A = 25^\circ\text{C}$ (Note 5)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
RS-423 CONNECTION, $V_{CC} = 5\text{V}$, $V_{EE} = -5\text{V}$, MODE SELECT = 2.4V						
t_r	Rise Time	$R_L = 450\Omega$, $C_L = 500\text{ pF}$, $C_C = 0$ (Figure 2)		120	300	ns
t_f	Fall Time	$R_L = 450\Omega$, $C_L = 500\text{ pF}$, $C_C = 0$ (Figure 2)		120	300	ns
t_r	Rise Time	$R_L = 450\Omega$, $C_L = 500\text{ pF}$, $C_C = 50\text{ pF}$ (Figure 3)	3.0			μs
t_f	Fall Time	$R_L = 450\Omega$, $C_L = 500\text{ pF}$, $C_C = 50\text{ pF}$ (Figure 3)	3.0			μs
t_{rC}	Rise Time Coefficient	$R_L = 450\Omega$, $C_L = 500\text{ pF}$, $C_C = 50\text{ pF}$ (Figure 3)	0.06			$\mu\text{s/pF}$
t_{PDH}	Output Propagation Delay	$R_L = 450\Omega$, $C_L = 500\text{ pF}$, $C_C = 0$ (Figure 2)		180	300	ns
t_{PDL}	Output Propagation Delay	$R_L = 450\Omega$, $C_L = 500\text{ pF}$, $C_C = 0$ (Figure 2)	180	300		ns



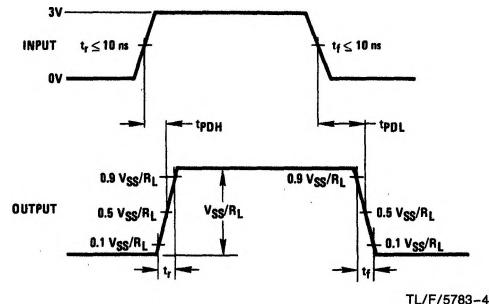
AC Test Circuits and Switching Time Waveforms

FIGURE 1. Differential Connection

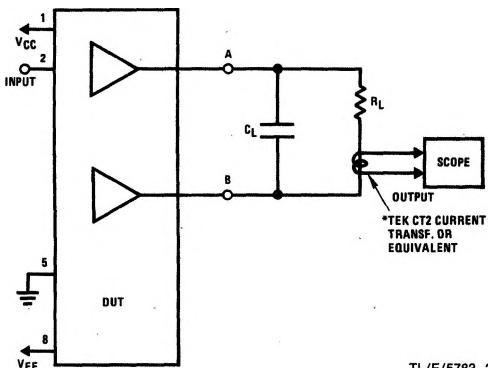

TL/F/5783-5




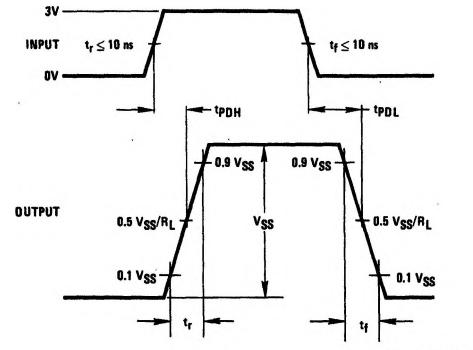


FIGURE 2. RS-423 Connection

AC Test Circuits and Switching Time Waveforms (Continued)

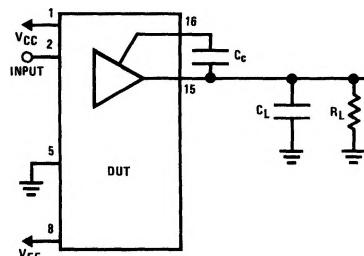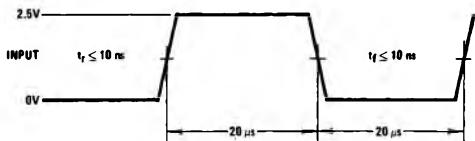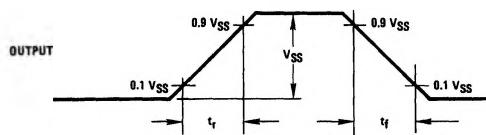


TL/F/5783-7


 $t_f \leq 10\text{ ns}$ $t_f \leq 10\text{ ns}$ 

TL/F/5783-8

FIGURE 3. Rise Time Control for RS-423

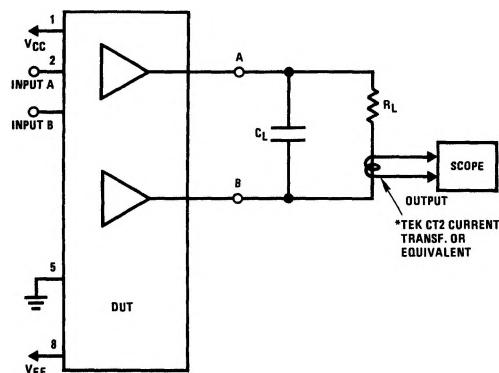


TL/F/5783-9

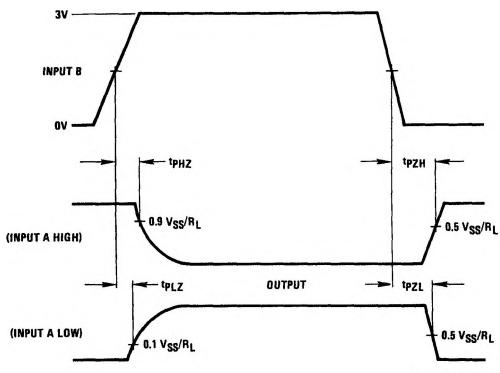

TL/F/5783-10

FIGURE 4. TRI-STATE Delays


Switching Waveforms

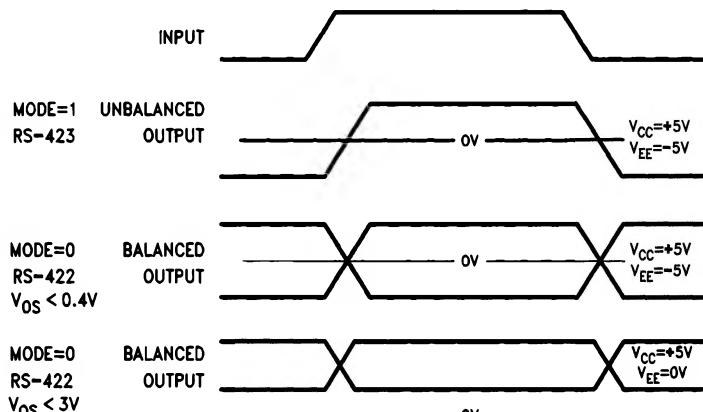


TL/F/5783-11

FIGURE 5. Typical Output Voltage


Typical Application Information

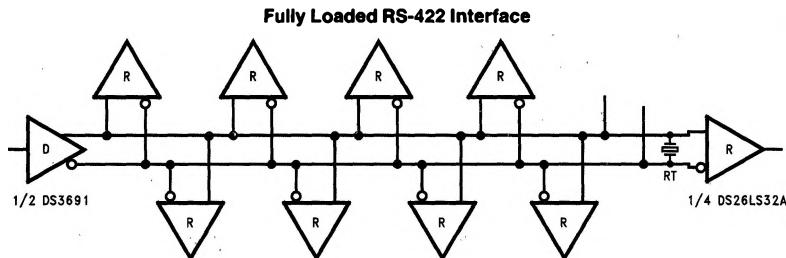


TL/F/5783-13

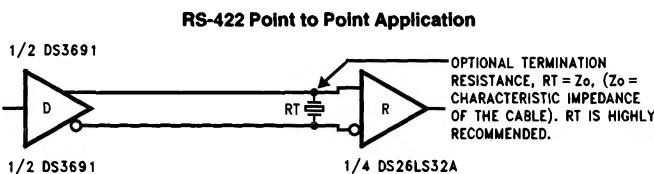

TL/F/5783-14

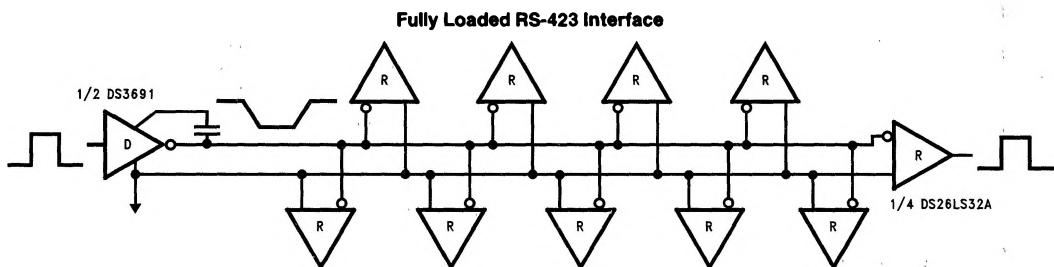


TL/F/5783-15

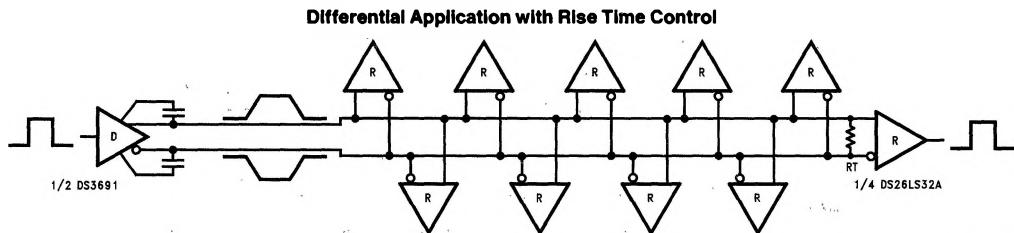

TL/F/5783-16


*Note: Controlled edge allows longer stub lengths. Multiple Drivers are NOT allowed.

Typical Application Information (Continued)

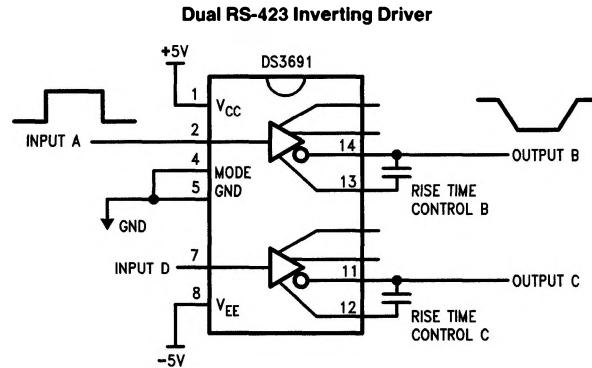

TL/F/5783-17

Typical Rise Time Control Characteristics (RS-423 Mode)

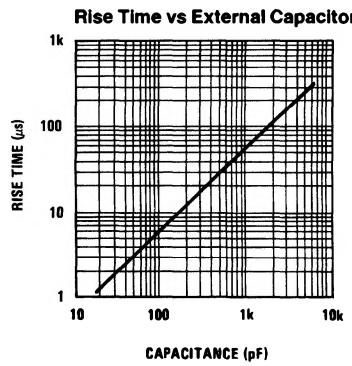

TL/F/5783-12