

## TV VERTICAL OUTPUT CIRCUIT

The KA2131 is a monolithic integrated circuit designed for the vertical output stage in color television receivers.


### FUNCTIONS

- Driver stage.
- Output stage.
- Flyback generators.
- Pulse shapers.

### FEATURES

- Low power consumption, direct deflection coil driving capability (Flyback voltage is two times as high as the supply voltage is supplied during flyback period only).
- High breakdown voltage: 60V.

9 SIP H/S

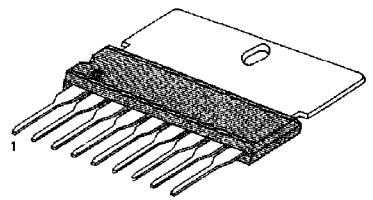

### ORDERING INFORMATION

### BLOCK DIAGRAM

Device	Package	Operating Temperature
KA2131	9 SIP H/S	-20 ~ +70°C

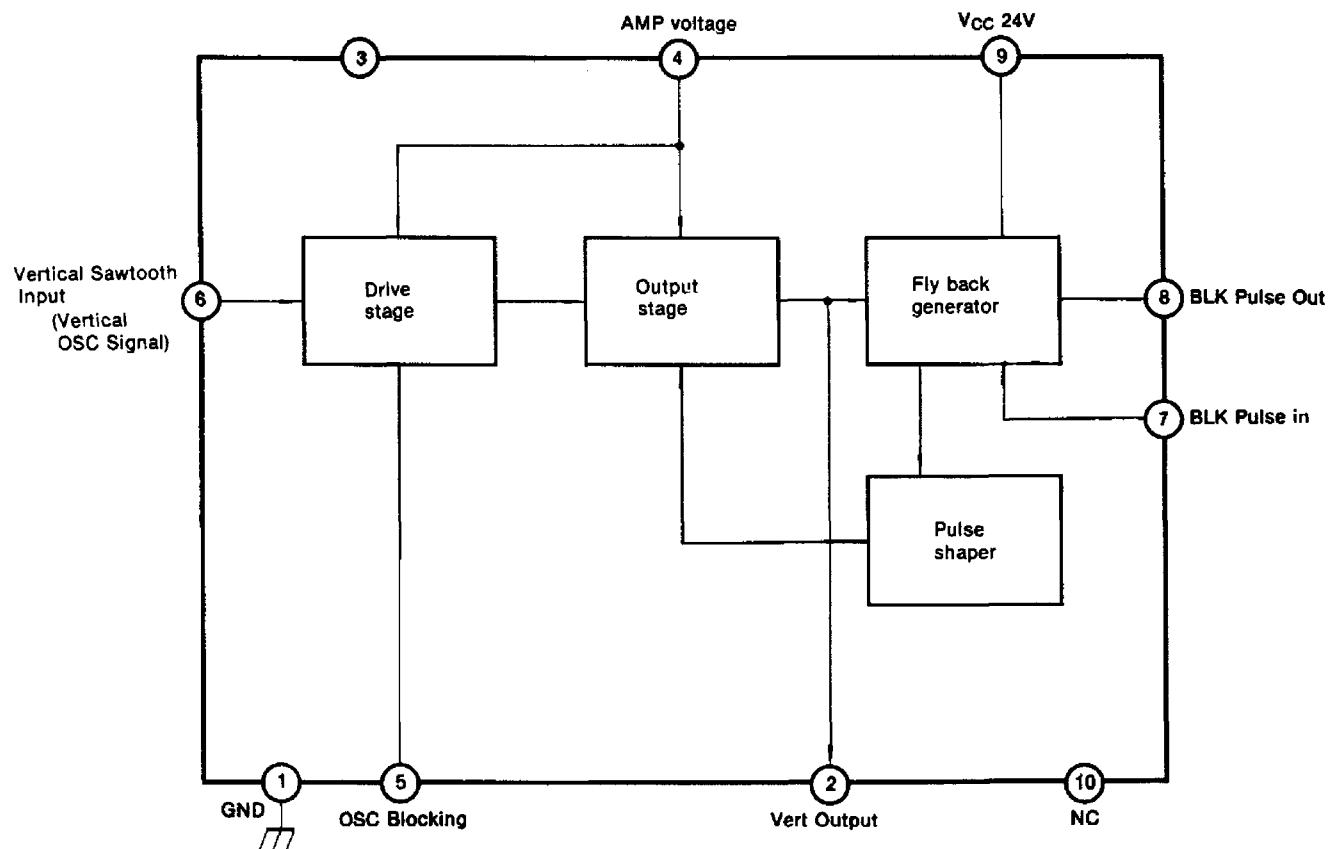


Fig. 1

## ABSOLUTE MAXIMUM RATINGS

Characteristic	Symbol	Value	Unit
Supply Voltage	V <sub>CC</sub>	27.6	V
Circuit Voltage	V <sub>4</sub>	60	V
	V <sub>6</sub>	2.5	V
	V <sub>7</sub>	1.3	V
Supply Current	I <sub>CC</sub>	250	mA
Power Dissipation	P <sub>D</sub>	6.66	W
Circuit Current	I <sub>2</sub>	-1000 ~ +1000	mA <sub>P-P</sub>
	I <sub>8</sub>	-1000 ~ +1000	mA <sub>P-P</sub>
Operating Temperature	T <sub>OPR</sub>	-20 ~ +70	°C
Storage Temperature	T <sub>STG</sub>	-55 ~ +150	°C

## ELECTRICAL CHARACTERISTICS

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Deflection Current	I <sub>Y P-P</sub>	SW:2	860	930	1000	mA <sub>P-P</sub>
Deflection Current Linearity	ΔI <sub>y</sub> (+)	SW: 1	25	—	75	mA <sub>P-P</sub>
	ΔI <sub>y</sub> (-)	SW:1	22	—	85	mA <sub>P-P</sub>
Deflection Current vs. Operating Temperature	ΔI <sub>y</sub> /T <sub>A</sub>	T <sub>a</sub> =-20 ~ +70°C	-1.5	—	1.5	%
Center Voltage	V <sub>MID</sub>	SW: 1	12.1	12.6	13.1	V
Flyback Pulse Amplitude	V(FBP)	SW: 1	47	—	—	V
Flyback Pulse Width	t <sub>FBP</sub>	SW: 1	850	920	980	μsec
Quiescent Circuit Current	I <sub>CQ</sub>	V <sub>4</sub> =24V V <sub>9</sub> =24V V <sub>7</sub> =0V 	7	13	22	mA
Output TR Saturation Voltage	V <sub>4-2</sub>	V <sub>4</sub> =V <sub>9</sub> =24V, pin <sub>2,1</sub> =56Ω V <sub>6</sub> =0.3V, V <sub>7</sub> =0V	—	2.7	3.7	V
	V <sub>2</sub>	V <sub>4</sub> =V <sub>9</sub> =24V, pin <sub>2,4</sub> =56Ω V <sub>6</sub> =1.3V, V <sub>7</sub> =0V	—	0.6	1.0	V
Saturation Voltage	V <sub>8</sub>	V <sub>9</sub> =24V, R <sub>pin9,8</sub> =1.2KΩ V <sub>7</sub> =0V	—	—	0.5	V
Thermal Resistance	R <sub>TH (J-C)</sub>		—	—	12	°C/W

## TYPICAL APPLICATION CIRCUIT

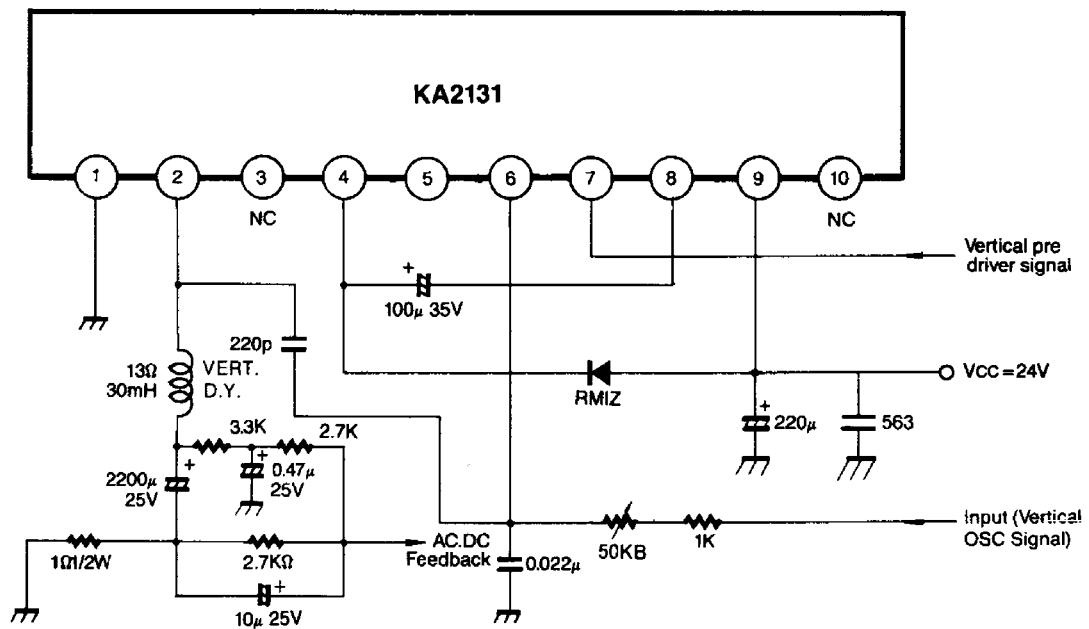


Fig. 2

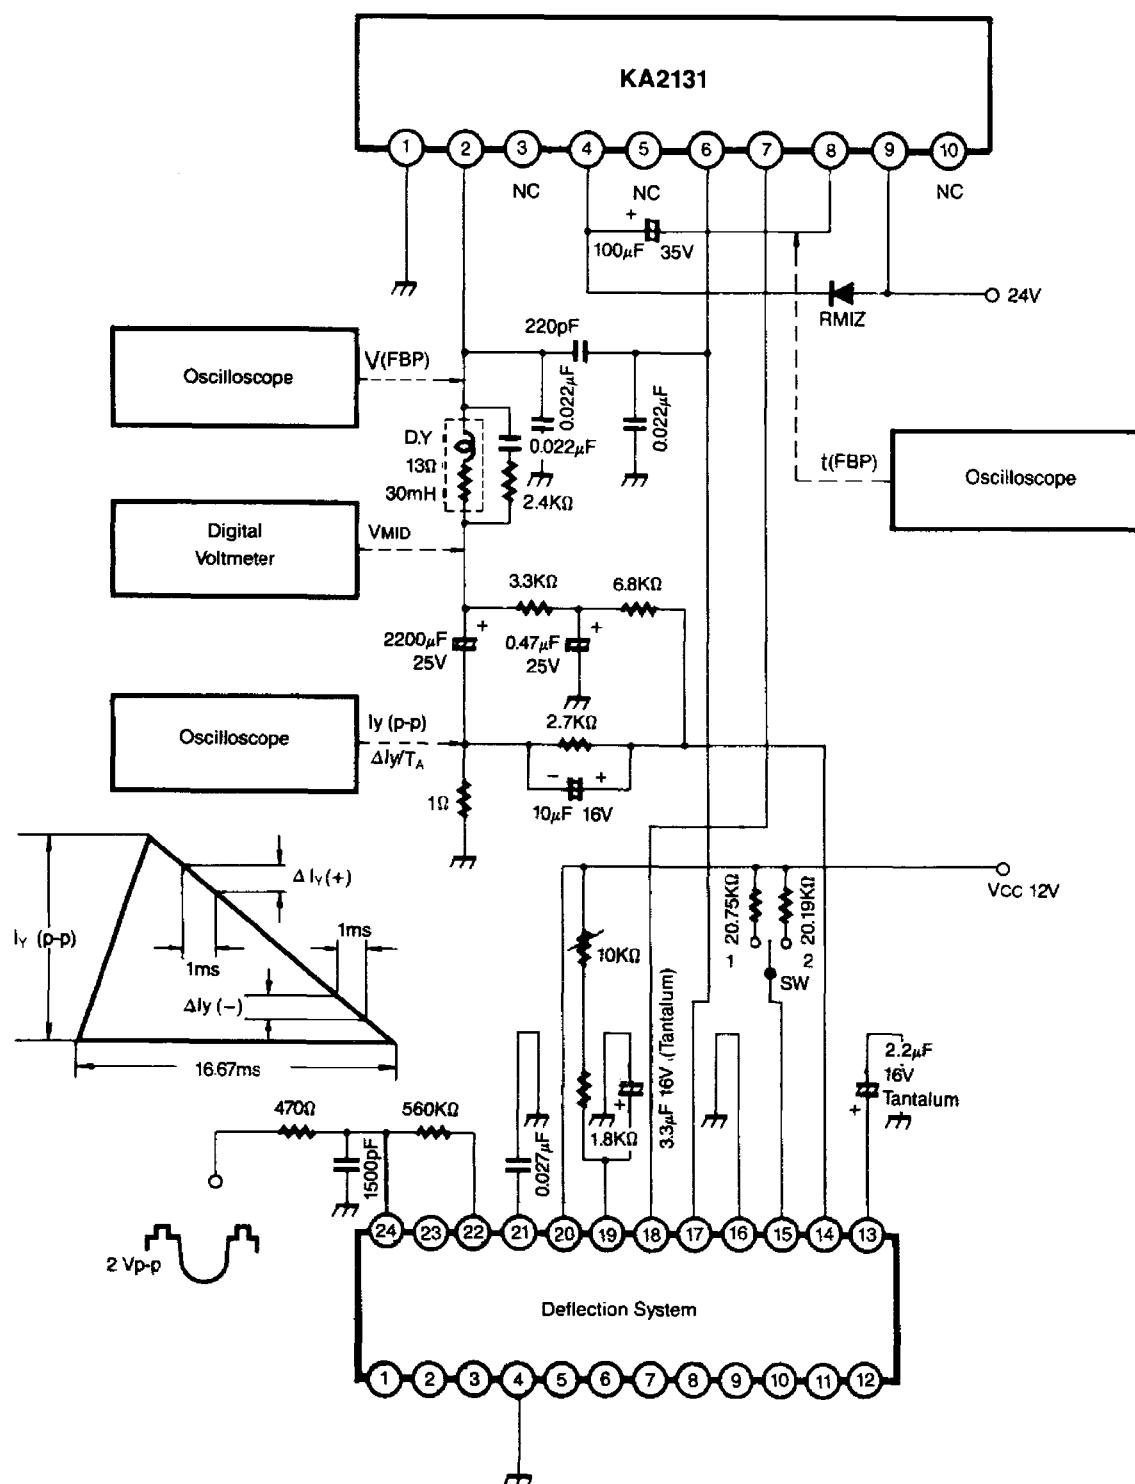
**TEST CIRCUIT**

Fig. 3