

LINEAR INTEGRATED CIRCUITS

DESCRIPTION

The LM101A, LM201A, and LM301A are high performance operational amplifiers featuring high gain, short circuit protection, simplified compensation and excellent temperature stability.

FEATURES

- SHORT CIRCUIT PROTECTION
- OFFSET VOLTAGE NULL CAPABILITY
- LARGE COMMON-MODE AND DIFFERENTIAL VOLTAGE RANGES
- LOW POWER CONSUMPTION
- NO LATCH UP


ABSOLUTE MAXIMUM RATINGS

Supply Voltage	LM101A/LM201A	±22V
	LM301A	±18V
Power Dissipation (Note 1)		500mW
Differential Input Voltage		±30V
Input Voltage (Note 2)		±15V
Output Short Circuit Duration		Indefinite
Operating Temperature Range	LM101A	-55°C to 125°C
	LM201A	-25°C to 85°C
	LM301A	0°C to 70°C
Storage Temperature Range		-65°C to 150°C
Lead Temperature (Soldering, 60 sec.)		300°C

NOTES:


1. Absolute maximum rating holds for all packages. The maximum junction temperature is 150°C for the LM101A and 100°C for the LM201A and the LM301A. For operation at elevated temperatures, derate according to appropriate thermal resistances given under package information.
2. For supply voltages less than ±15V, the absolute maximum input voltage is equal to the supply voltage.

EQUIVALENT CIRCUIT

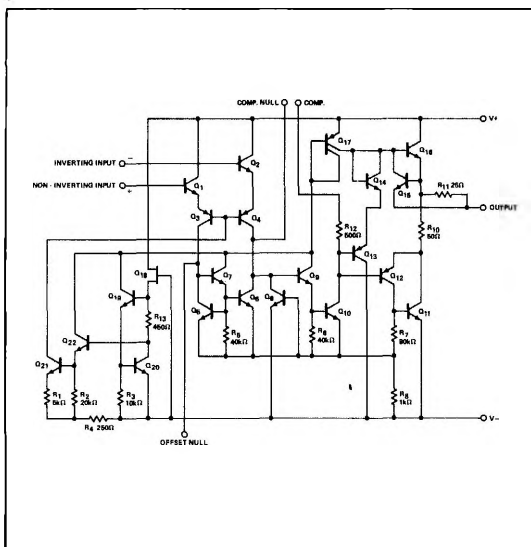

PIN CONFIGURATIONS


A & I PACKAGE (Top View)

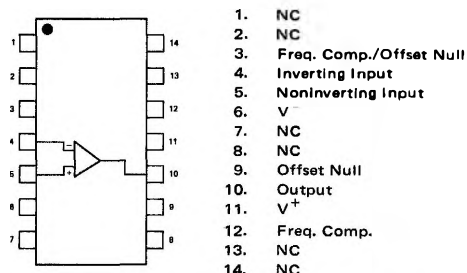

ORDER PART NOS.

LM101AD/LM201A/LM301AD LM101AN-14/LM301AN-14/
LM301AN-14


Q PACKAGE

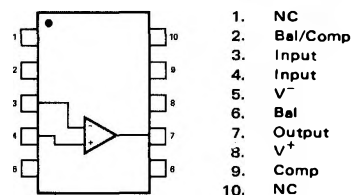

ORDER PART NOS.

LM101AQ/LM201AQ/LM301AQ

T PACKAGE




- | | |
|----|-------------------------|
| 1. | Freq. Comp./Offset Null |
| 2. | Inverting Input |
| 3. | Noninverting Input |
| 4. | V ⁻ |
| 5. | Offset Null |
| 6. | Output |
| 7. | V ⁺ |
| 8. | Freq. Comp. |

ORDER PART NOS.

LM101AH/LM201AH/LM301AH

V PACKAGE



- | | |
|----|-------------------------|
| 1. | Freq. Comp./Offset Null |
| 2. | Inverting Input |
| 3. | Noninverting Input |
| 4. | V ⁻ |
| 5. | Offset Null |
| 6. | Output |
| 7. | V ⁺ |
| 8. | Freq. Comp. |

ORDER PART NO.

LM101AN/LM201AN/LM301AN

ELECTRICAL CHARACTERISTICS

LM101A: $-55^{\circ}\text{C} \leq T_A \leq 125^{\circ}\text{C}$

LM201A: $-25^{\circ}\text{C} \leq T_A \leq 85^{\circ}\text{C}$ $\pm 5\text{V} \leq V_S \leq \pm 20\text{V}$ and $C_1 = 30\text{pF}$ unless otherwise specified.)

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Input Offset Voltage	$T_A = 25^{\circ}\text{C}$, $R_S \leq 50\text{k}\Omega$		0.7	2.0	mV
Input Offset Current	$T_A = 25^{\circ}\text{C}$		1.5	10	nA
Input Bias Current	$T_A = 25^{\circ}\text{C}$		30	75	nA
Input Resistance	$T_A = 25^{\circ}\text{C}$	1.5	4		M Ω
Supply Current	$T_A = 25^{\circ}\text{C}$, $V_S = \pm 20\text{V}$		1.8	3.0	mA
Large Signal Voltage Gain	$T_A = 25^{\circ}\text{C}$, $V_S = \pm 15\text{V}$ $V_{\text{OUT}} = \pm 10\text{V}$, $R_L > 2\text{k}\Omega$	50	160		V/mV
Input Offset Voltage	$R_S \leq 50\text{k}\Omega$			3.0	mV
Average Temperature Coefficient of Input Offset Voltage			3.0	15	$\mu\text{V}/^{\circ}\text{C}$
Input Offset Current				20	nA
Average Temperature Coefficient of Input Offset Current	$25^{\circ}\text{C} \leq T_A \leq 125^{\circ}\text{C}$ $-55^{\circ}\text{C} \leq T_A \leq 25^{\circ}\text{C}$		0.01 0.02	0.1 0.2	nA/ $^{\circ}\text{C}$ nA/ $^{\circ}\text{C}$
Input Bias Current				100	nA
Supply Current	$T_A = +125^{\circ}\text{C}$, $V_S = \pm 20\text{V}$		1.2	2.5	mA
Large Signal Voltage Gain	$V_S = \pm 15\text{V}$, $V_{\text{OUT}} = \pm 10\text{V}$ $R_L > 2\text{k}\Omega$	25			V/mV
Output Voltage Swing	$V_S = \pm 15\text{V}$, $R_L = 10\text{k}\Omega$ $R_L = 2\text{k}\Omega$	± 12 ± 10	± 14 ± 13		V V
Input Voltage Range	$V_S = \pm 20\text{V}$	± 15			V
Common Mode Rejection Ratio	$R_S \leq 50\text{k}\Omega$	80	96		dB
Supply Voltage Rejection Ratio	$R_S \leq 50\text{k}\Omega$	80	96		dB

LM301A


ELECTRICAL CHARACTERISTICS ($0^{\circ}\text{C} \leq T_A < 70^{\circ}\text{C}$, $\pm 5\text{V} \leq V_S \leq \pm 15\text{V}$ and $C_1 = 30\text{pF}$ unless otherwise specified.)

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
Input Offset Voltage	$T_A = 25^{\circ}\text{C}$, $R_S \leq 50\text{k}\Omega$		2.0	7.5	mV
Input Offset Current	$T_A = 25^{\circ}\text{C}$		3	50	nA
Input Bias Current	$T_A = 25^{\circ}\text{C}$		70	250	nA
Input Resistance	$T_A = 25^{\circ}\text{C}$	0.5	2		M Ω
Supply Current	$T_A = 25^{\circ}\text{C}$, $V_S = \pm 15\text{V}$		1.8	3.0	mA
Large Signal Voltage Gain	$T_A = 25^{\circ}\text{C}$, $V_S = \pm 15\text{V}$ $V_{\text{OUT}} = \pm 10\text{V}$; $R_L > 2\text{k}\Omega$	25	160		V/mV
Input Offset Voltage	$R_S \leq 50\text{k}\Omega$			10	mV
Average Temperature Coefficient of Input Offset Voltage			6.0	30	$\mu\text{V}/^{\circ}\text{C}$
Input Offset Current				70	nA
Average Temperature Coefficient of Input Offset Current	$25^{\circ}\text{C} \leq T_A < 70^{\circ}\text{C}$ $0^{\circ}\text{C} \leq T_A \leq 25^{\circ}\text{C}$		0.01 0.02	0.3 0.6	nA/ $^{\circ}\text{C}$ nA/ $^{\circ}\text{C}$
Input Bias Current				300	nA
Large Signal Voltage Gain	$V_S = \pm 15\text{V}$, $V_{\text{OUT}} = \pm 10\text{V}$ $R_L > 2\text{k}\Omega$	15			V/mV
Output Voltage Swing	$V_S = \pm 15\text{V}$, $R_L = 10\text{k}\Omega$ $R_L = 2\text{k}\Omega$	± 12 ± 10	± 14 ± 13		V V
Input Voltage Range	$V_S = \pm 15\text{V}$	± 12			V
Common Mode Rejection Ratio	$R_S \leq 50\text{k}\Omega$	70	90		dB
Supply Voltage Rejection Ratio	$R_S \leq 50\text{k}\Omega$	70	96		dB


TYPICAL CHARACTERISTIC CURVES

LM101A/LM201A/


INPUT VOLTAGE RANGE
VERSUS SUPPLY VOLTAGE



OUTPUT SWING VERSUS
SUPPLY VOLTAGE




VOLTAGE GAIN VERSUS
SUPPLY VOLTAGE




LM301A


INPUT VOLTAGE RANGE
VERSUS SUPPLY VOLTAGE



OUTPUT SWING VERSUS
SUPPLY VOLTAGE




VOLTAGE GAIN VERSUS
SUPPLY VOLTAGE




LM101A/LM201A


VOLTAGE GAIN



SUPPLY CURRENT




INPUT CURRENT




TYPICAL CHARACTERISTIC CURVES (Cont'd.)

LM301A


VOLTAGE GAIN



SUPPLY CURRENT




INPUT CURRENT




LM101A/LM201A/LM301A


CURRENT LIMITING




INPUT NOISE VOLTAGE




INPUT NOISE CURRENT

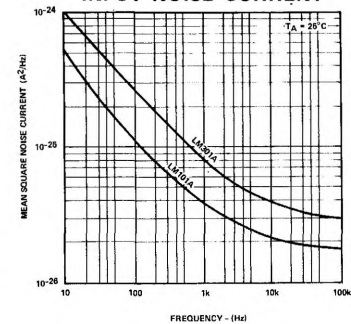


COMMON MODE REJECTION



POWER SUPPLY REJECTION




CLOSED LOOP OUTPUT IMPEDANCE




TYPICAL CHARACTERISTIC CURVES (Cont'd.)

OPEN LOOP FREQUENCY RESPONSE

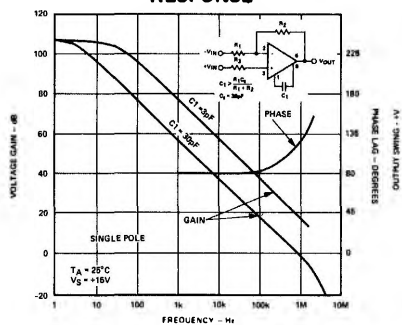

LARGE SIGNAL FREQUENCY RESPONSE



VOLTAGE FOLLOWER PULSE RESPONSE

