

14-Bit and 16-Bit Parallel Low Glitch Multiplying DACs with 4-Quadrant Resistors

DESCRIPTION

FEATURES


- True 16-Bit Performance Over Industrial Temperature Range
- DNL and INL: 1LSB Max
- On-Chip 4-Quadrant Resistors Allow Precise 0V to 10V, 0V to -10V or \pm 10V Outputs
- Pin Compatible 14- and 16-Bit Parts
- Asynchronous Clear Pin
 - LTC1591/LTC1597: Reset to Zero Scale
 - LTC1591-1/LTC1597-1: Reset to Midscale
- Glitch Impulse < 2nV-s
- 28-Lead SSOP Package
- Low Power Consumption: 10 μ W Typ
- Power-On Reset

APPLICATIONS


- Process Control and Industrial Automation
- Direct Digital Waveform Generation
- Software-Controlled Gain Adjustment
- Automatic Test Equipment

TYPICAL APPLICATION


16-Bit, 4-Quadrant Multiplying DAC with a Minimum of External Components

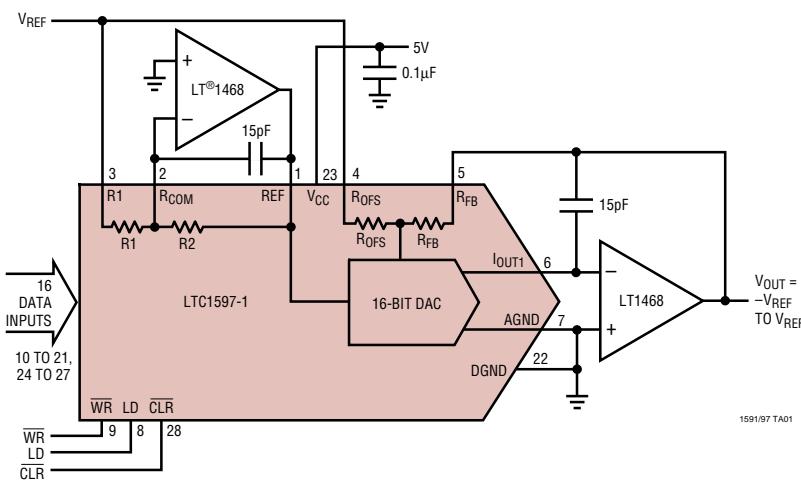

LTC1591/LTC1591-1 Integral Nonlinearity

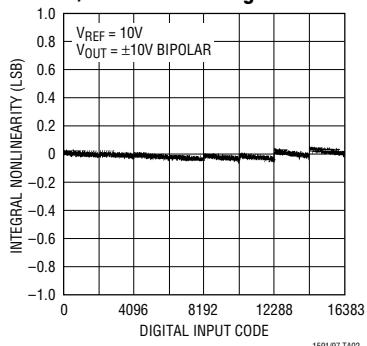

LTC1597/LTC1597-1 Integral Nonlinearity

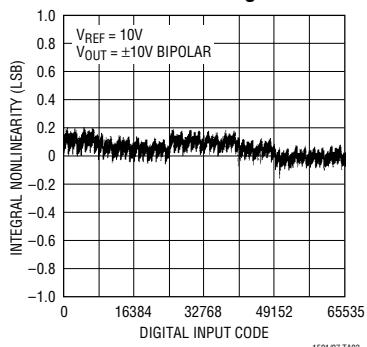

ABSOLUTE MAXIMUM RATINGS (Note 1)

V _{CC} to AGND	-0.5V to 7V	Operating Temperature Range
V _{CC} to DGND	-0.5V to 7V	LTC1591C/LTC1591-1C
AGND to DGND	V _{CC} + 0.5V	LTC1597C/LTC1597-1C 0°C to 70°C
DGND to AGND	V _{CC} + 0.5V	LTC1591I/LTC1591-1I
REF, R _{OFS} , R _{FB} , R ₁ , R _{COM} to AGND, DGND	±25V	LTC1597I/LTC1597-1I -40°C to 85°C
Digital Inputs to DGND	-0.5V to (V _{CC} + 0.5V)	Storage Temperature Range -65°C to 150°C
I _{OUT1} to AGND	-0.5V to (V _{CC} + 0.5V)	Lead Temperature (Soldering, 10 sec) 300°C
Maximum Junction Temperature	125°C	

PACKAGE/ORDER INFORMATION

TOP VIEW	ORDER PART NUMBER	TOP VIEW	ORDER PART NUMBER
<p>TOP VIEW REF [1] 28 CLR R_{COM} [2] 27 NC R₁ [3] 26 NC R_{OFS} [4] 25 D0 R_{FB} [5] 24 D1 I_{OUT1} [6] 23 V_{CC} AGND [7] 22 DGND LD [8] 21 D2 WR [9] 20 D3 D13 [10] 19 D4 D12 [11] 18 D5 D11 [12] 17 D6 D10 [13] 16 D7 D9 [14] 15 D8 </p> <p>G PACKAGE N PACKAGE 28-LEAD PLASTIC SSOP 28-LEAD NARROW PDIP</p> <p>T_{JMAX} = 125°C, θ_{JA} = 95°C/W (G) T_{JMAX} = 125°C, θ_{JA} = 70°C/W (N)</p>	LTC1591CG LTC1591CN LTC1591IG LTC1591IN LTC1591-1CG LTC1591-1CN LTC1591-1IG LTC1591-1IN	<p>TOP VIEW REF [1] 28 CLR R_{COM} [2] 27 D0 R₁ [3] 26 D1 R_{OFS} [4] 25 D2 R_{FB} [5] 24 D3 I_{OUT1} [6] 23 V_{CC} AGND [7] 22 DGND LD [8] 21 D4 WR [9] 20 D5 D15 [10] 19 D6 D14 [11] 18 D7 D13 [12] 17 D8 D12 [13] 16 D9 D11 [14] 15 D10 </p> <p>G PACKAGE N PACKAGE 28-LEAD PLASTIC SSOP 28-LEAD NARROW PDIP</p> <p>T_{JMAX} = 125°C, θ_{JA} = 95°C/W (G) T_{JMAX} = 125°C, θ_{JA} = 70°C/W (N)</p>	LTC1597ACG LTC1597ACN LTC1597BCG LTC1597BCN LTC1597-1ACG LTC1597-1ACN LTC1597-1BCG LTC1597-1BCN LTC1597AIG LTC1597AIN LTC1597BIG LTC1597BIN LTC1597-1AIG LTC1597-1AIN LTC1597-1BIG LTC1597-1BIN

Consult factory for Military grade parts.

ELECTRICAL CHARACTERISTICS

$V_{CC} = 5V \pm 10\%$, $V_{REF} = 10V$, $I_{OUT1} = AGND = DGND = 0V$, $T_A = T_{MIN}$ to T_{MAX} , unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS	LTC1591/-1			LTC1597B/-1B			LTC1597A/-1A			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	
Accuracy												
	Resolution		●	14		16		16		16		Bits
	Monotonicity		●	14		16		16		16		Bits
INL	Integral Nonlinearity	(Note 2) $T_A = 25^\circ C$ T_{MIN} to T_{MAX}	●	± 1		± 2		± 0.25	± 1	± 0.35	± 1	LSB
DNL	Differential Nonlinearity	$T_A = 25^\circ C$ T_{MIN} to T_{MAX}	●	± 1		± 1		± 0.2	± 1	± 0.2	± 1	LSB
GE	Gain Error	Unipolar Mode (Note 3) $T_A = 25^\circ C$ T_{MIN} to T_{MAX}	●	± 4		± 16		2	± 16	3	± 16	LSB
		Bipolar Mode (Note 3) $T_A = 25^\circ C$ T_{MIN} to T_{MAX}	●	± 4		± 16		2	± 16	3	± 16	LSB
	Gain Temperature Coefficient	(Note 4) $\Delta GAIN / \Delta Temperature$	●	1	2	1	2	1	2	1	2	ppm/ $^\circ C$
	Bipolar Zero-Scale Error	$T_A = 25^\circ C$ T_{MIN} to T_{MAX}	●	± 3		± 10		± 5		± 8		LSB
I_{LKG}	OUT1 Leakage Current	(Note 5) $T_A = 25^\circ C$ T_{MIN} to T_{MAX}	●	± 5		± 5		± 5		± 15		nA
PSRR	Power Supply Rejection Ratio	$V_{CC} = 5V \pm 10$	●	± 0.1	± 1	± 0.4	± 2	± 0.4	± 2	LSB/V		

$V_{CC} = 5V \pm 10\%$, $V_{REF} = 10V$, $I_{OUT1} = AGND = DGND = 0V$, $T_A = T_{MIN}$ to T_{MAX} , unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS	
Reference Input							
R_{REF}	DAC Input Resistance (Unipolar)	(Note 6)	●	4.5	6	10	k Ω
$R1/R2$	$R1/R2$ Resistance (Bipolar)	(Notes 6, 13)	●	9	12	20	k Ω
R_{OFS}, R_{FB}	Feedback and Offset Resistances	(Note 6)	●	9	12	20	k Ω
AC Performance (Note 4)							
	Output Current Settling Time	(Notes 7, 8)			1		μs
	Midscale Glitch Impulse	(Note 12)			2		nV-s
	Digital-to-Analog Glitch Impulse	(Note 9)			1		nV-s
	Multiplying Feedthrough Error	$V_{REF} = \pm 10V$, 10kHz Sine Wave			1		mV _{P-P}
THD	Total Harmonic Distortion	(Note 10)			108		dB
	Output Noise Voltage Density	(Note 11)			10		nV/ \sqrt{Hz}
	Harmonic Distortion (Digital Waveform Generation)	Unipolar Mode (Note 14) 2nd Harmonic 3rd Harmonic SFDR			94		dB
		Bipolar Mode (Note 14) 2nd Harmonic 3rd Harmonic SFDR			101		dB
					94		dB
					94		dB
					101		dB
					94		dB

ELECTRICAL CHARACTERISTICS

$V_{CC} = 5V \pm 10\%$, $V_{REF} = 10V$, $I_{OUT1} = AGND = DGND = 0V$, $T_A = T_{MIN}$ to T_{MAX} , unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS	
Analog Outputs (Note 4)							
C_{OUT}	Output Capacitance (Note 4)	DAC Register Loaded to All 1s: C_{OUT1} DAC Register Loaded to All 0s: C_{OUT1}	● ●	115 70	130 80	pF pF	
Digital Inputs							
V_{IH}	Digital Input High Voltage		●	2.4		V	
V_{IL}	Digital Input Low Voltage		●		0.8	V	
I_{IN}	Digital Input Current		●	0.001	± 1	μA	
C_{IN}	Digital Input Capacitance	(Note 4) $V_{IN} = 0V$	●		8	pF	
Timing Characteristics							
t_{DS}	Data to WR Setup Time		●	60	20	ns	
t_{DH}	Data to WR Hold Time		●	0	-12	ns	
t_{WR}	WR Pulse Width		●	60	25	ns	
t_{LD}	LD Pulse Width		●	110	55	ns	
t_{CLR}	Clear Pulse Width		●	60	40	ns	
t_{LWD}	WR to LD Delay Time		●	0		ns	
Power Supply							
V_{DD}	Supply Voltage		●	4.5	5	5.5	V
I_{DD}	Supply Current	Digital Inputs = 0V or V_{CC}	●		10	μA	

The ● denotes specifications that apply over the full operating temperature range.

Note 1: Absolute Maximum Values are those beyond which the life of a device may be impaired.

Note 2: $\pm 1LSB = \pm 0.006\%$ of full scale = $\pm 61ppm$ of full scale for the LTC1591/LTC1591-1. $\pm 1LSB = \pm 0.0015\%$ of full scale = $\pm 15.3ppm$ of full scale for the LTC1597/LTC1597-1.

Note 3: Using internal feedback resistor.

Note 4: Guaranteed by design, not subject to test.

Note 5: $I_{(OUT1)}$ with DAC register loaded to all 0s.

Note 6: Typical temperature coefficient is $100ppm/\text{ }^{\circ}\text{C}$.

Note 7: I_{OUT1} load = 100Ω in parallel with $13pF$.

Note 8: To 0.006% for a full-scale change, measured from the rising edge of LD for the LTC1591/LTC1591-1. To 0.0015% for a full-scale change, measured from the rising edge of LD for the LTC1597/LTC1597-1.

Note 9: $V_{REF} = 0V$. DAC register contents changed from all 0s to all 1s or all 1s to all 0s.

Note 10: $V_{REF} = 6V_{RMS}$ at 1kHz. DAC register loaded with all 1s.

Note 11: Calculation from $e_n = \sqrt{4kT_B}$ where: k = Boltzmann constant ($J/\text{ }^{\circ}\text{K}$), R = resistance (Ω), T = temperature ($\text{ }^{\circ}\text{K}$), B = bandwidth (Hz).


Note 12: Midscale transition code: 01 1111 1111 1111 to 10 0000 0000 0000 for the LTC1591/LTC1591-1 and 0111 1111 1111 1111 to 1000 0000 0000 for the LTC1597/LTC1597-1.

Note 13: R1 and R2 are measured between R1 and R_{COM} , REF and R_{COM} .


Note 14: Measured using the LT1468 op amp in unipolar mode for I/V converter and LT1468 I/V and LT1001 reference in bipolar mode. Sample Rate = 50kHz, Signal Frequency = 1kHz, $V_{REF} = 5V$, $T_A = 25\text{ }^{\circ}\text{C}$.

TYPICAL PERFORMANCE CHARACTERISTICS (LTC1591/LTC1597)


Midscale Glitch Impulse

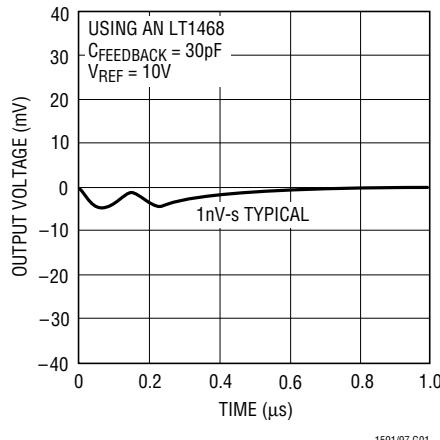


Full-Scale Settling Waveform

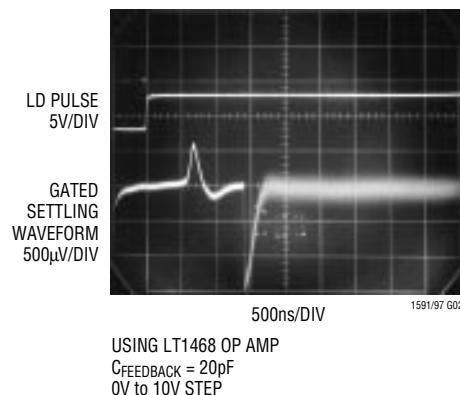


Unipolar Multiplying Mode Signal-to-(Noise + Distortion) vs Frequency

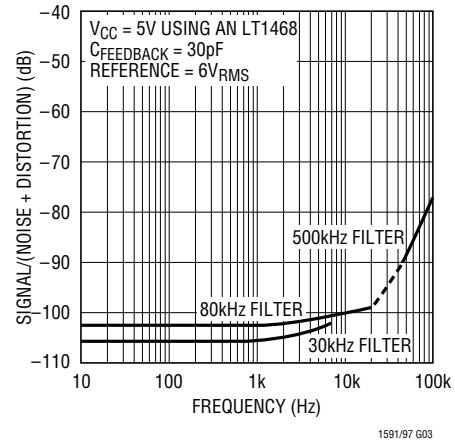


Bipolar Multiplying Mode Signal-to-(Noise + Distortion) vs Frequency, Code = All Zeros

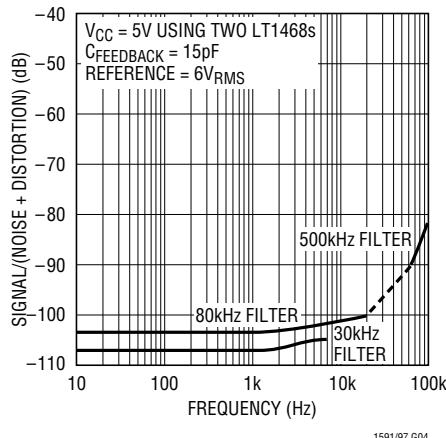


Bipolar Multiplying Mode Signal-to-(Noise + Distortion) vs Frequency, Code = All Ones

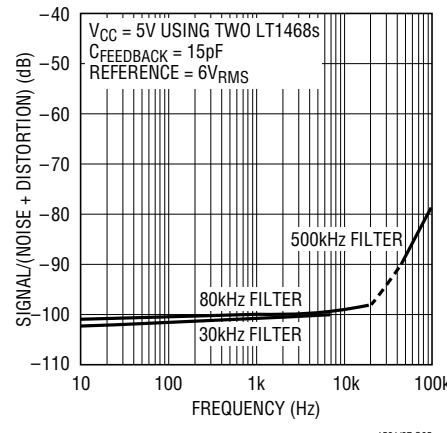










Supply Current vs Input Voltage

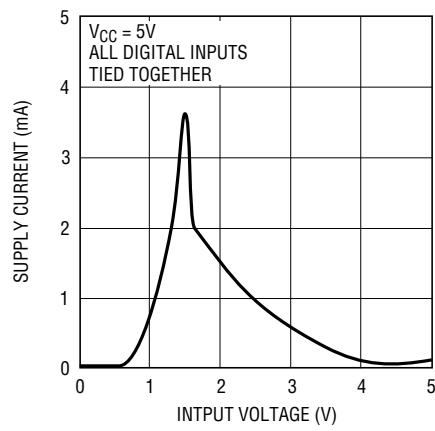


Logic Threshold vs Supply Voltage

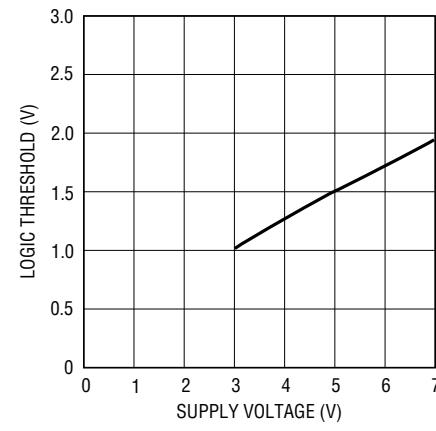


TYPICAL PERFORMANCE CHARACTERISTICS (LTC1591)

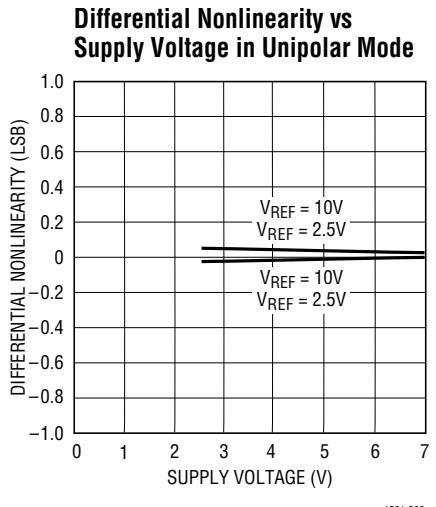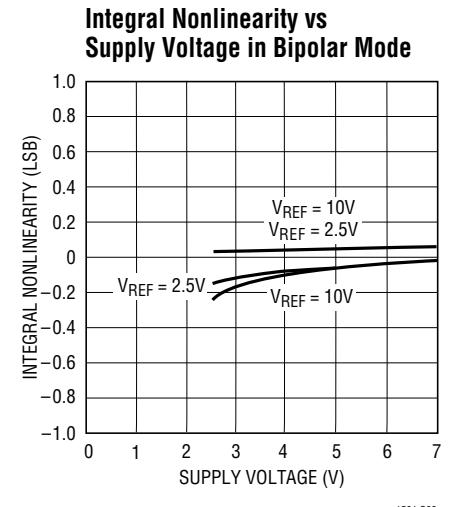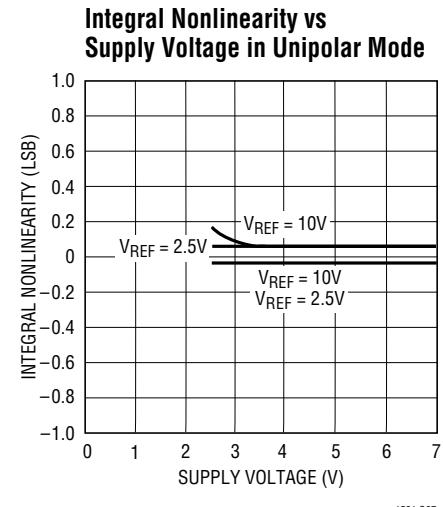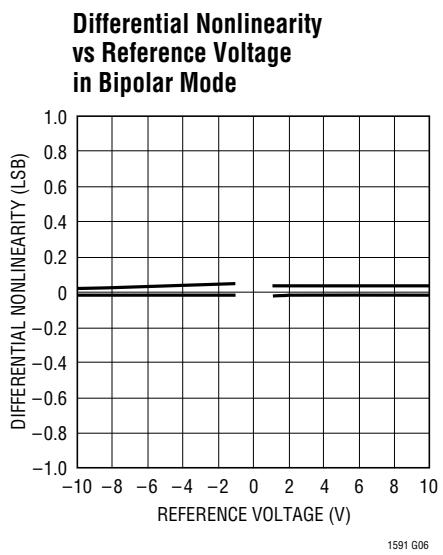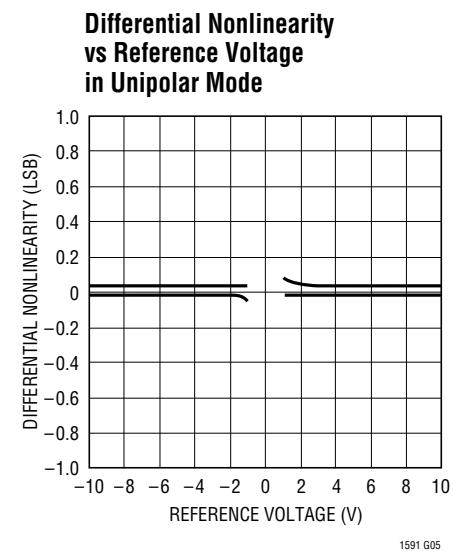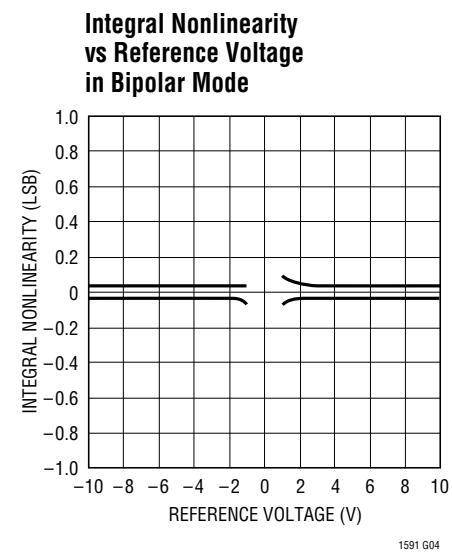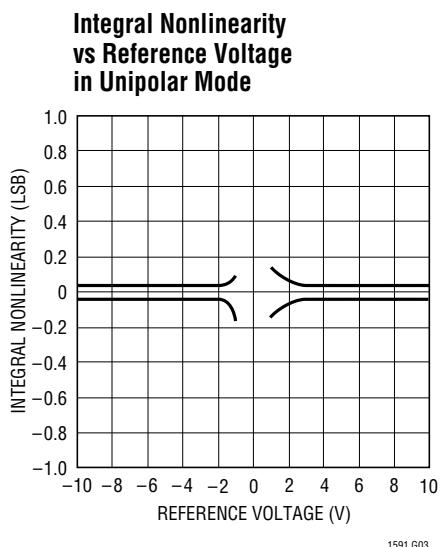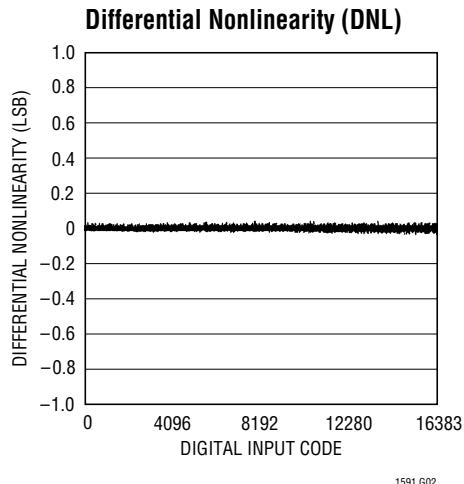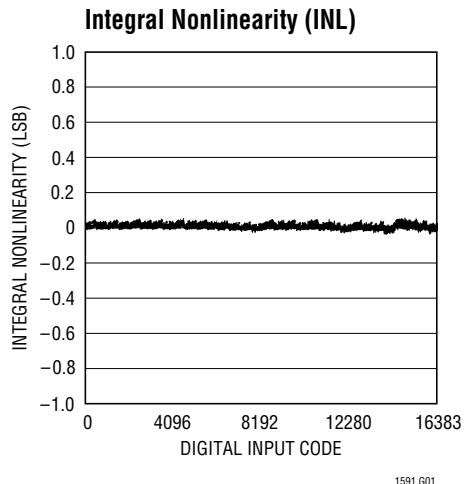



TYPICAL PERFORMANCE CHARACTERISTICS (LTC1591)

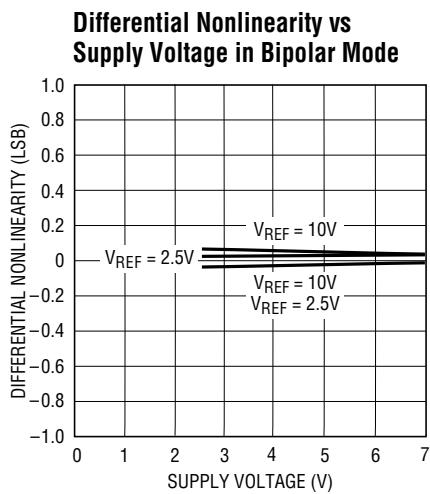

1591 G10


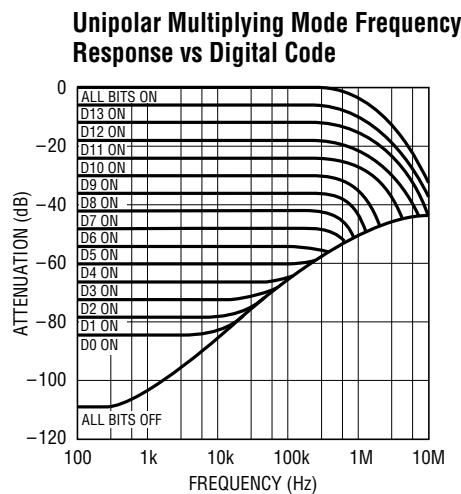


1591G11

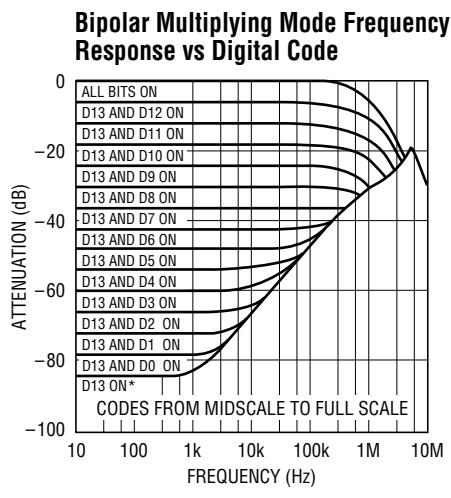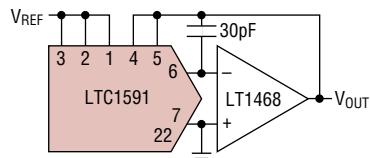


1591 G12

*DAC ZERO VOLTAGE OUTPUT LIMITED BY BIPOLAR ZERO ERROR TO -84dB TYPICAL (-70dB MAX)








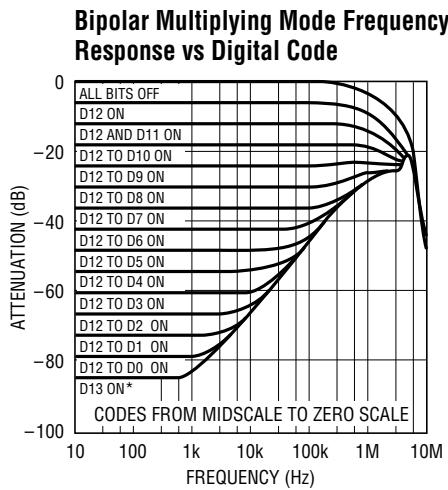
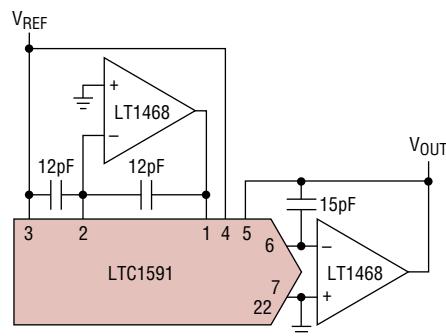


1591G13


*DAC ZERO VOLTAGE OUTPUT LIMITED BY BIPOLAR ZERO ERROR TO -84dB TYPICAL (-70dB MAX)

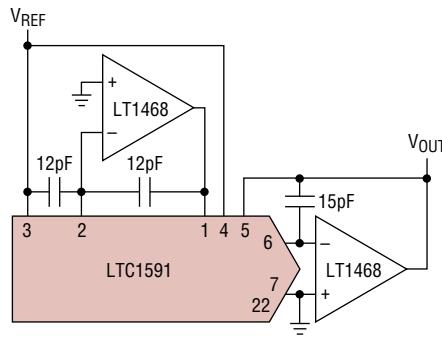


TYPICAL PERFORMANCE CHARACTERISTICS (LTC1597)

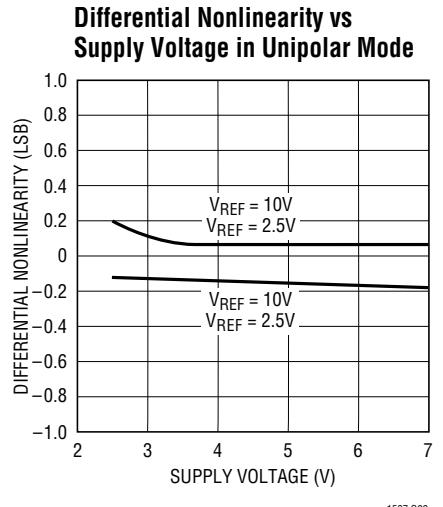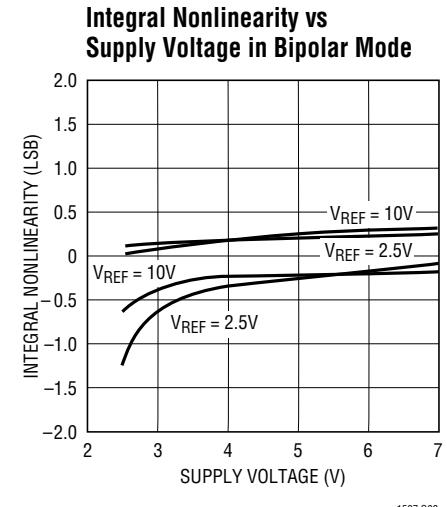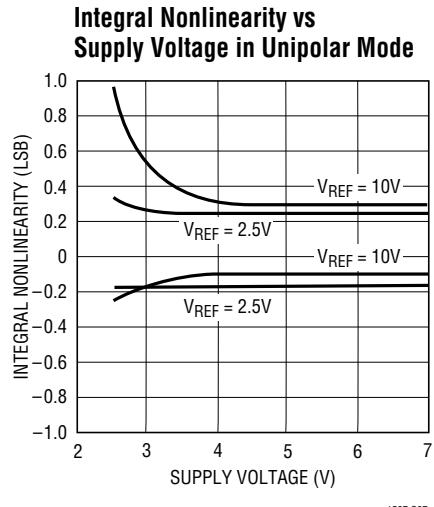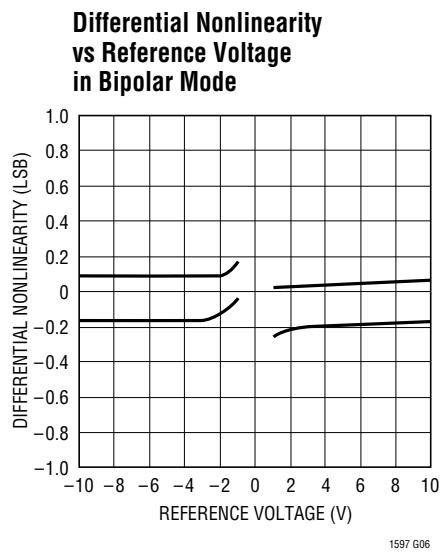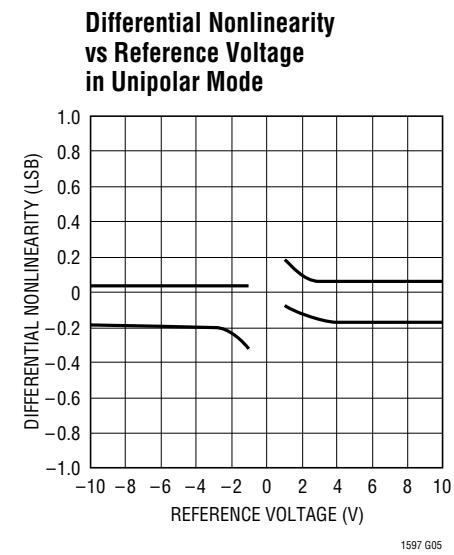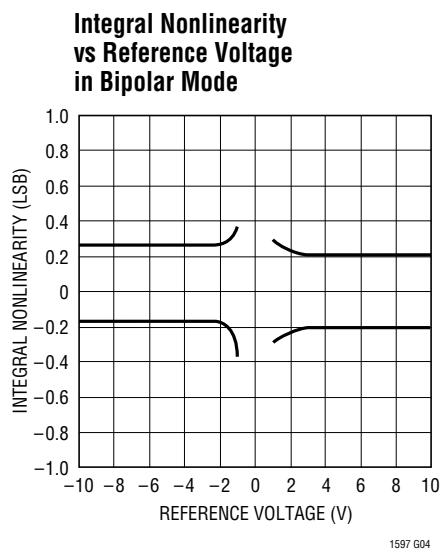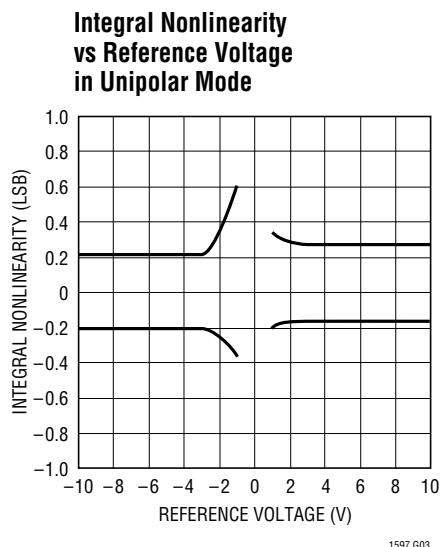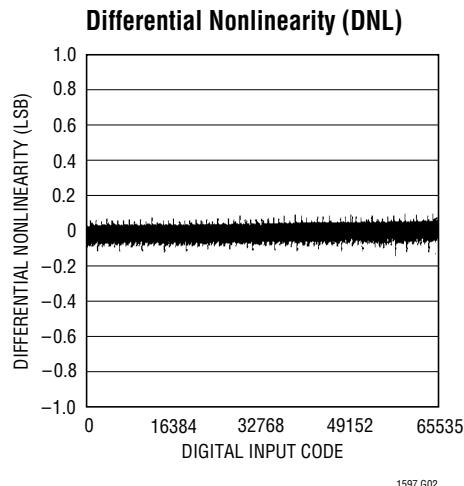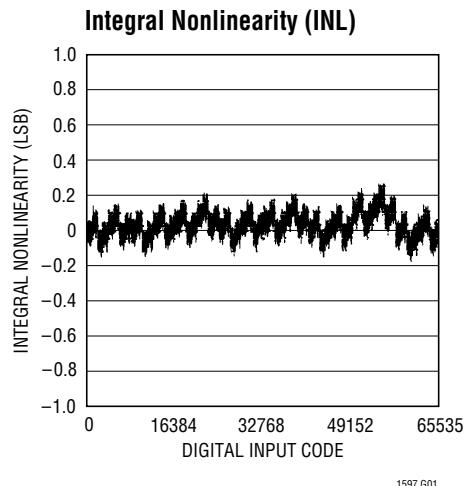



TYPICAL PERFORMANCE CHARACTERISTICS (LTC1597)

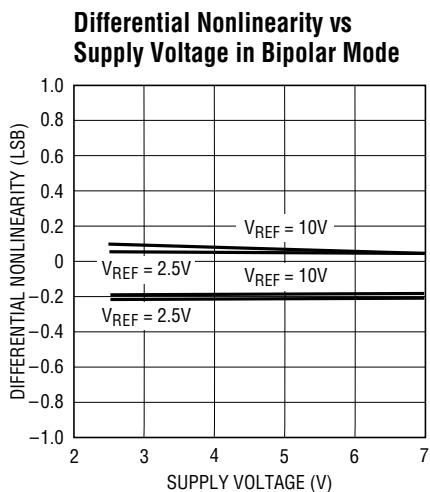

1597 G10

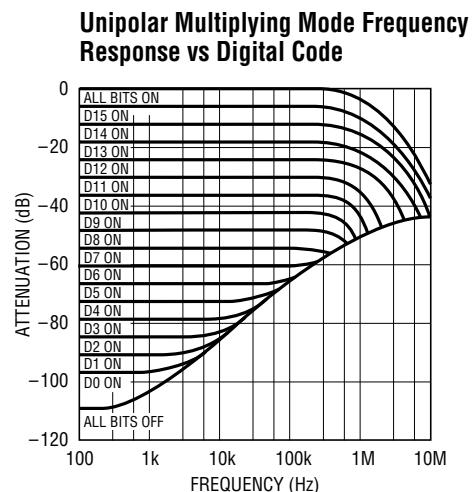


1597 G11

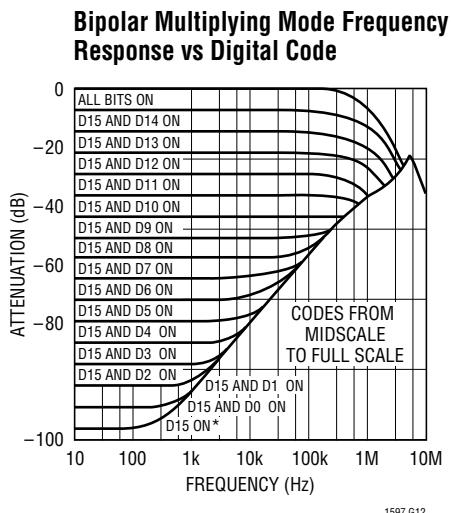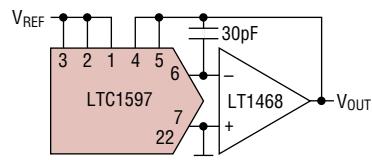



1597 G12

*DAC ZERO VOLTAGE OUTPUT LIMITED BY BIPOLAR ZERO ERROR TO -96dB TYPICAL (-78dB MAX, A GRADE)

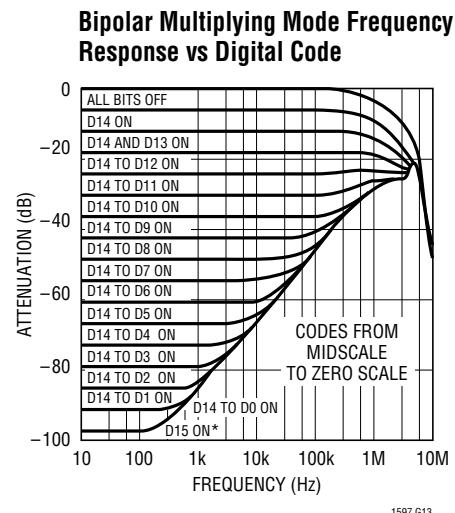

1597 G13

*DAC ZERO VOLTAGE OUTPUT LIMITED BY BIPOLAR ZERO ERROR TO -96dB TYPICAL (-78dB MAX, A GRADE)

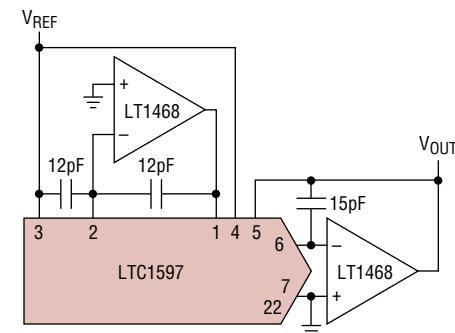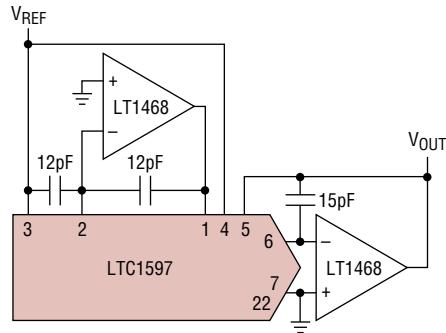

PIN FUNCTIONS

LTC1591

REF (Pin 1): Reference Input and 4-Quadrant Resistor R2. Typically $\pm 10V$, accepts up to $\pm 25V$. In 2-Quadrant mode this is the reference input. In 4-quadrant mode, this pin is driven by external inverting reference amplifier.

R_{COM} (Pin 2): Center Tap Point of the Two 4-Quadrant Resistors R1 and R2. Normally tied to the inverting input of an external amplifier in 4-quadrant operation, otherwise shorted to the REF pin. See Figures 1a and 2a.

R1 (Pin 3): 4-Quadrant Resistor R1. In 2-quadrant operation short to the REF pin. In 4-quadrant mode tie to R_{OFS} (Pin 4).

R_{OFS} (Pin 4): Bipolar Offset Resistor. Typically swings $\pm 10V$, accepts up to $\pm 25V$. In 2-quadrant operation tie to R_{FB}. In 4-quadrant operation tie to R1.

R_{FB} (Pin 5): Feedback Resistor. Normally tied to the output of the current to voltage converter op amp. Swings to $\pm V_{REF}$. V_{REF} is typically $\pm 10V$.

I_{OUT1} (Pin 6): DAC Current Output. Tie to the inverting input of the current to voltage converter op amp.

AGND (Pin 7): Analog Ground. Tie to ground.

LD (Pin 8): DAC Digital Input Load Control Input. When LD is taken to a logic high, data is loaded from the input register into the DAC register, updating the DAC output.

WR (Pin 9): DAC Digital Write Control Input. When WR is taken to a logic low, data is loaded from the digital input pins into the 14-bit wide input register.

DB13 to D2 (Pins 10 to 21): Digital Input Data Bits.

DGND (Pin 22): Digital Ground. Tie to ground.

V_{CC} (Pin 23): The Positive Supply Input. $4.5V \leq V_{CC} \leq 5.5V$. Requires a bypass capacitor to ground.

DB1, DB0 (Pins 24, 25): Digital Input Data Bits.

NC (Pins 26, 27): No Connect.

CLR (Pin 28): Digital Clear Control Function for the DAC. When CLR is taken to a logic low, it sets the DAC output and all internal registers to zero code for the LTC1591 and midscale code for the LTC1591-1.

LTC1597

REF (Pin 1): Reference Input and 4-Quadrant Resistor R2. Typically $\pm 10V$, accepts up to $\pm 25V$. In 2-Quadrant mode this is the reference input. In 4-quadrant mode, this pin is driven by external inverting reference amplifier.

R_{COM} (Pin 2): Center Tap Point of the Two 4-Quadrant Resistors R1 and R2. Normally tied to the inverting input of an external amplifier in 4-quadrant operation, otherwise shorted to the REF pin. See Figures 1b and 2b.

R1 (Pin 3): 4-Quadrant Resistor R1. In 2-quadrant operation short to the REF pin. In 4-quadrant mode tie to R_{OFS} (Pin 4).

R_{OFS} (Pin 4): Bipolar Offset Resistor. Typically swings $\pm 10V$, accepts up to $\pm 25V$. In 2-quadrant operation tie to R_{FB}. In 4-quadrant operation tie to R1.

R_{FB} (Pin 5): Feedback Resistor. Normally tied to the output of the current to voltage converter op amp. Swings to $\pm V_{REF}$. V_{REF} is typically $\pm 10V$.

I_{OUT1} (Pin 6): DAC Current Output. Tie to the inverting input of the current to voltage converter op amp.

AGND (Pin 7): Analog Ground. Tie to ground.

LD (Pin 8): DAC Digital Input Load Control Input. When LD is taken to a logic high, data is loaded from the input register into the DAC register, updating the DAC output.

WR (Pin 9): DAC Digital Write Control Input. When WR is taken to a logic low, data is loaded from the digital input pins into the 16-bit wide input register.

DB15 to D4 (Pins 10 to 21): Digital Input Data Bits.

DGND (Pin 22): Digital Ground. Tie to ground.

V_{CC} (Pin 23): The Positive Supply Input. $4.5V \leq V_{CC} \leq 5.5V$. Requires a bypass capacitor to ground.


DB3 to DB0 (Pins 24 to 27): Digital Input Data Bits.

CLR (Pin 28): Digital Clear Control Function for the DAC. When CLR is taken to a logic low, it sets the DAC output and all internal registers to zero code for the LTC1597 and midscale code for the LTC1597-1.

TRUTH TABLE


Table 1

CONTROL INPUTS			REGISTER OPERATION
CLR	WR	LD	
0	X	X	Reset Input and DAC Register to All 0s for LTC1591/LTC1597 and Midscale for LTC1591-1/LTC1597-1 (Asynchronous Operation)
1	0	0	Load Input Register with All 14/16 Data Bits
1	1	1	Load DAC Register with the Contents of the Input Register
1	0	1	Input and DAC Register Are Transparent
1	1	1	CLK = LD and WR Tied Together. The 14/16 Data Bits Are Loaded into the Input Register on the Falling Edge of the CLK and Then Loaded into the DAC Register on the Rising Edge of the CLK
1	1	0	No Register Operation

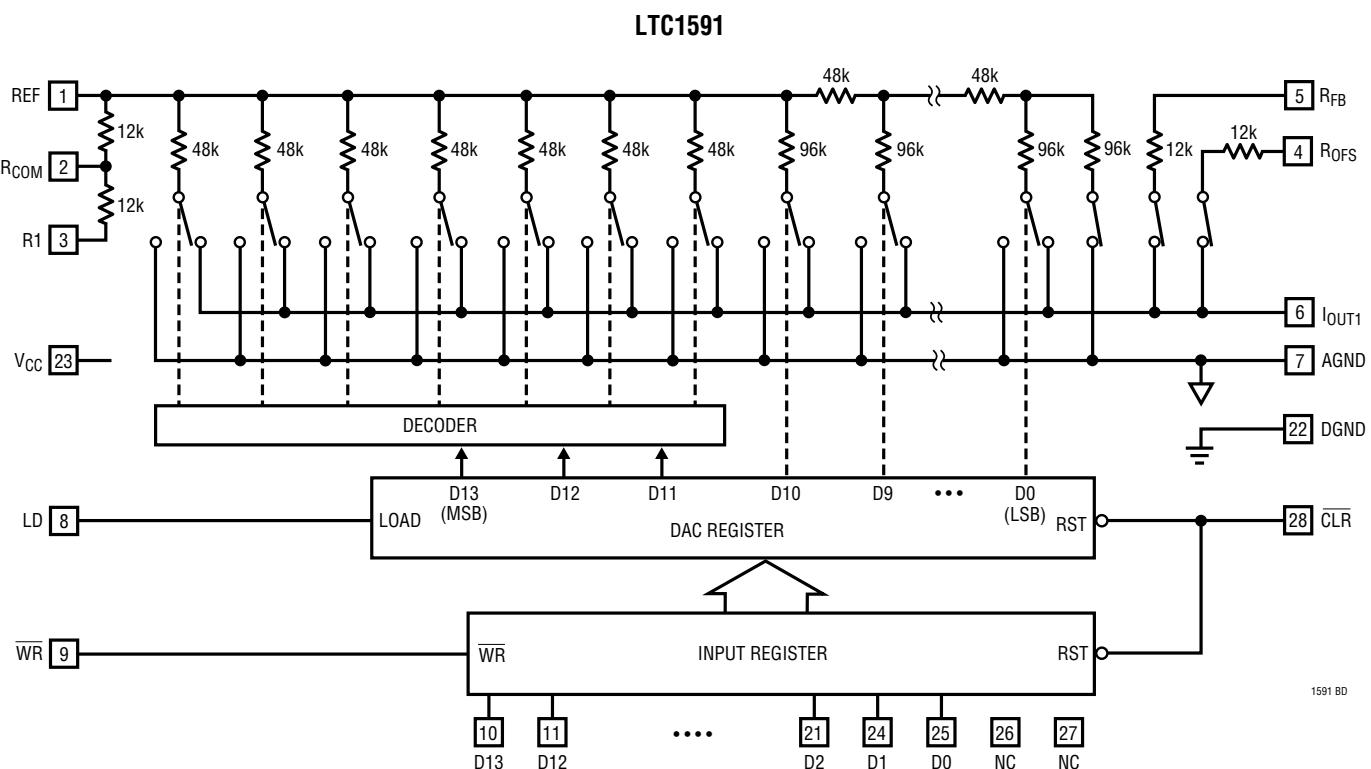
BLOCK DIAGRAMS

LTC1591/LTC1597

BLOCK DIAGRAMS

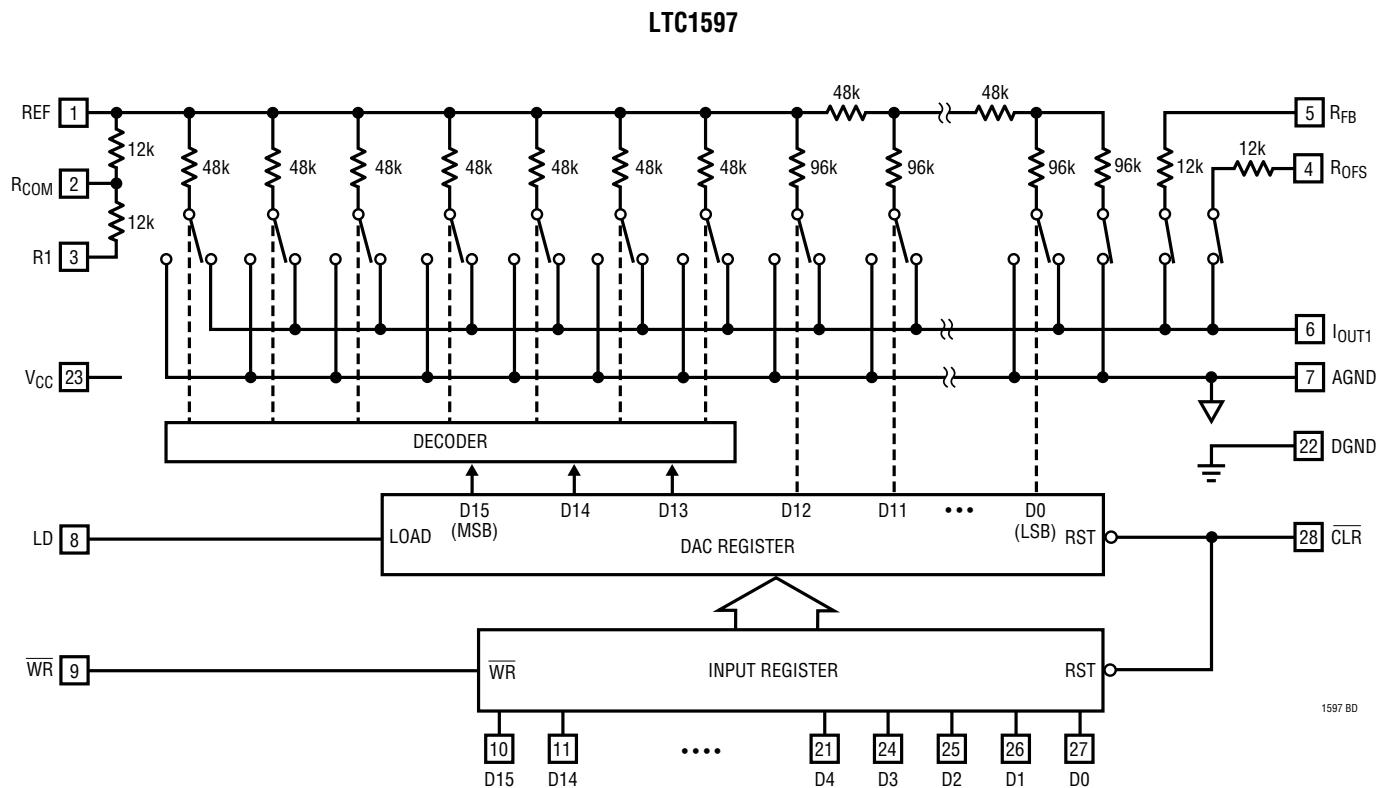

TIMING DIAGRAM

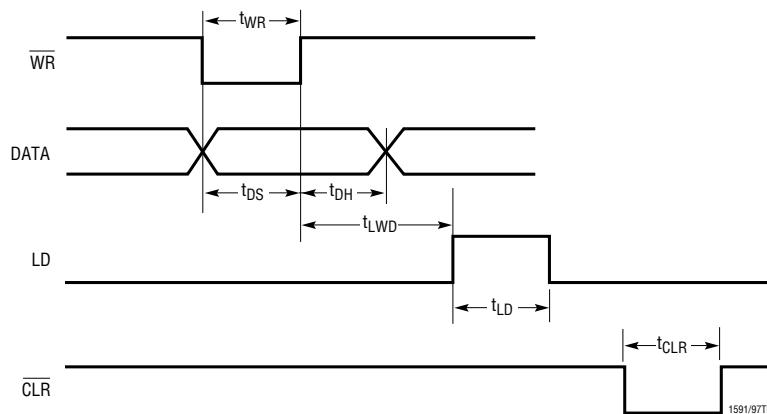

APPLICATIONS INFORMATION

Description

The LTC1591/LTC1597 are 14-/16-bit multiplying, current output DACs with a full parallel 14-/16-bit digital interface. The devices operate from a single 5V supply and provide both unipolar 0V to -10V or 0V to 10V and bipolar $\pm 10\text{V}$ output ranges from a 10V or -10V reference input. They have three additional precision resistors on chip for bipolar operation. Refer to the block diagrams regarding the following description.

The 14-/16-bit DACs consist of a precision R-2R ladder for the 11/13LSBs. The 3MSBs are decoded into seven segments of resistor value R. Each of these segments and the R-2R ladder carries an equally weighted current of one eighth of full scale. The feedback resistor R_{FB} and 4-quadrant resistor R_{OFS} have a value of $R/4$. 4-quadrant resistors R_1 and R_2 have a magnitude of $R/4$. R_1 and R_2 together with an external op amp (see Figure 2) invert the reference input voltage and applies it to the 14-/16-bit DAC input REF, in 4-quadrant operation. The REF pin presents a constant input impedance of $R/8$ in unipolar mode and $R/12$ in bipolar mode. The output impedance of the current output pin I_{OUT1} varies with DAC input code. The I_{OUT1} capacitance due to the NMOS current steering switches also varies with input code from 70pF to 115pF . An added feature of these devices, especially for waveform generation, is a proprietary deglitcher that reduces glitch energy to below $2\text{nV}\cdot\text{s}$ over the DAC output voltage range.


Digital Section

The LTC1591/LTC1597 are 14-/16-bit wide full parallel data bus inputs. The devices are double-buffered with two 14-/16-bit registers. The double-buffered feature permits the update of several DACs simultaneously. The input register is loaded directly from a 16-bit microprocessor bus when the WR pin is brought to a logic low level. The second register (DAC register) is updated with the data from the input register when the LD pin is brought to a logic high level. Updating the DAC register updates the DAC output with the new data. To make both registers transparent for flowthrough mode, tie WR low and LD high. However, this defeats the deglitcher operation and output glitch impulse may increase. The deglitcher is activated on the rising edge of the LD pin. The versatility of the interface also allows the use of the input and DAC registers in a master slave or edge-triggered configuration. This mode of operation occurs when WR and LD are tied together. The asynchronous clear pin resets the LTC1591/LTC1597 to zero scale and the LTC1591-1/LTC1597-1 to midscale. CLR resets both the input and DAC registers. These devices also have a power-on reset. Table 1 shows the truth table for the LTC1591/LT1597.

Unipolar Mode

(2-Quadrant Multiplying, $V_{OUT} = 0\text{V}$ to $-V_{REF}$)

The LTC1591/LTC1597 can be used with a single op amp to provide 2-quadrant multiplying operation as shown in Figure 1. With a fixed -10V reference, the circuits shown give a precision unipolar 0V to 10V output swing.

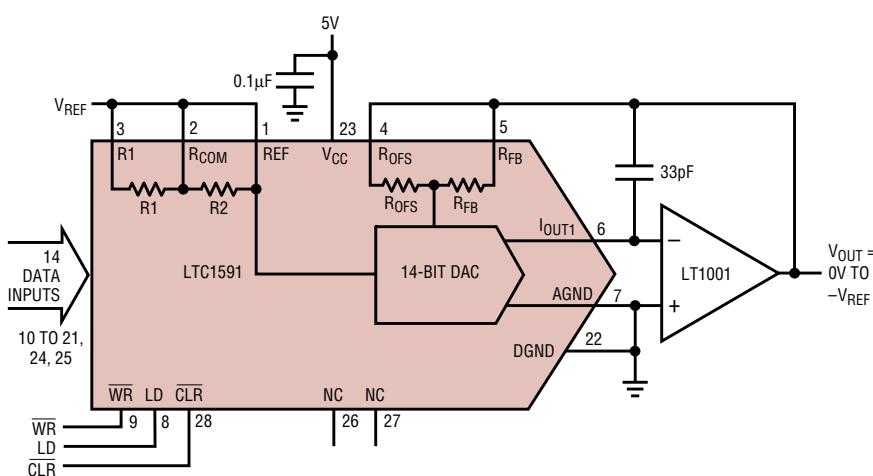


Unipolar Binary Code Table

DIGITAL INPUT BINARY NUMBER IN DAC REGISTER		ANALOG OUTPUT V_{OUT}
MSB	LSB	
1111	1111 1111 11	$-V_{REF}$ ($16,383/16,384$)
1000	0000 0000 00	$-V_{REF}$ ($8,192/16,384$) = $-V_{REF}/2$
0000	0000 0000 01	$-V_{REF}$ ($1/16,384$)
0000	0000 0000 00	0V

1591/97 F01a

Figure 1a. Unipolar Operation (2-Quadrant Multiplication) $V_{OUT} = 0\text{V}$ to $-V_{REF}$

APPLICATIONS INFORMATION

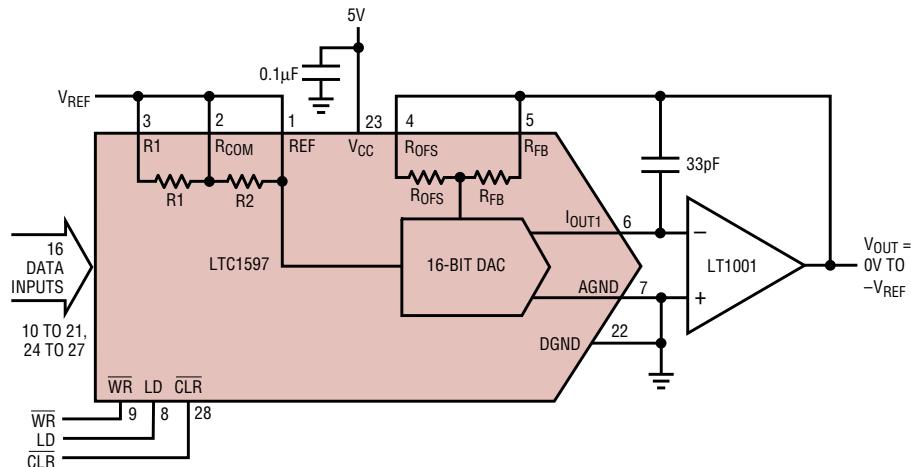

Unipolar Binary Code Table

DIGITAL INPUT BINARY NUMBER IN DAC REGISTER		ANALOG OUTPUT V _{OUT}
MSB	LSB	
1111	1111 1111 1111	-V _{REF} (65,535/65,536)
1000	0000 0000 0000	-V _{REF} (32,768/65,536) = -V _{REF} /2
0000	0000 0000 0001	-V _{REF} (1/65,536)
0000	0000 0000 0000	0V

1591/97 F01b

Figure 1b. Unipolar Operation (2-Quadrant Multiplication) V_{OUT} = 0V to -V_{REF}

Bipolar Mode

(4-Quadrant Multiplying, V_{OUT} = -V_{REF} to V_{REF})

The LTC1591/LTC1597 contain on chip all the 4-quadrant resistors necessary for bipolar operation. 4-quadrant multiplying operation can be achieved with a minimum of external components, a capacitor and a dual op amp, as shown in Figure 2. With a fixed 10V reference, the circuit shown gives a precision bipolar -10V to 10V output swing.

Op Amp Selection

Because of the extremely high accuracy of the 14-/16-bit LTC1591/LTC1597, thought should be given to op amp selection in order to achieve the exceptional performance of which the part is capable. Fortunately, the sensitivity of INL and DNL to op amp offset has been greatly reduced compared to previous generations of multiplying DACs.

Op amp offset will contribute mostly to output offset and gain and will have minimal effect on INL and DNL. For the LTC1597, a 500µV op amp offset will cause about 0.55LSB INL degradation and 0.15LSB DNL degradation with a 10V full-scale range. The main effects of op amp offset will be a degradation of zero-scale error equal to the op amp

offset, and a degradation of full-scale error equal to twice the op amp offset. For the LTC1597, the same 500µV op amp offset (2mV offset for LTC1591) will cause a 3.3LSB zero-scale error and a 6.5LSB full-scale error with a 10V full-scale range.


Op amp input bias current (I_{BIAS}) contributes only a zero-scale error equal to I_{BIAS}(R_{FB}/R_{OFS}) = I_{BIAS}(6k). For a thorough discussion of 16-bit DAC settling time and op amp selection, refer to Application Note 74, "Component and Measurement Advances Ensure 16-Bit DAC Settling Time."

Reference Input and Grounding

For optimum performance the reference input of the LTC1597 should be driven by a source impedance of less than 1kΩ. However, these DACs have been designed to minimize source impedance effects. An 8kΩ source impedance degrades both INL and DNL by 0.2LSB.

As with any high resolution converter, clean grounding is important. A low impedance analog ground plane and star grounding should be used. AGND must be tied to the star ground with as low a resistance as possible.


APPLICATIONS INFORMATION

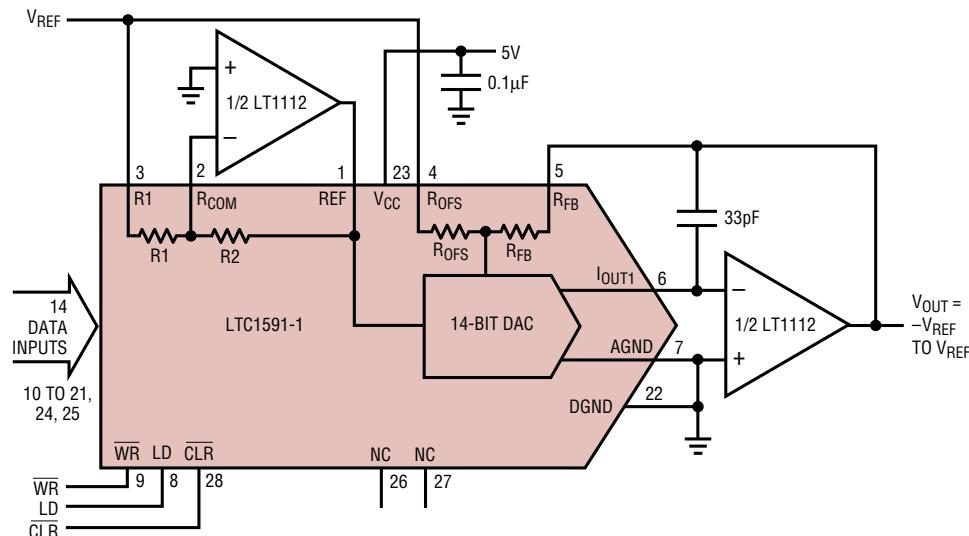

Bipolar Offset Binary Code Table

DIGITAL INPUT BINARY NUMBER IN DAC REGISTER	ANALOG OUTPUT V_{OUT}	
	MSB	LSB
1111 1111 1111 11	$V_{REF} (8,191/8,192)$	
1000 0000 0000 01	$V_{REF} (1/8,192)$	
1000 0000 0000 00	0V	
0111 1111 1111 11	$-V_{REF} (1/8,192)$	
0000 0000 0000 00	$-V_{REF}$	

1591/97 F02a

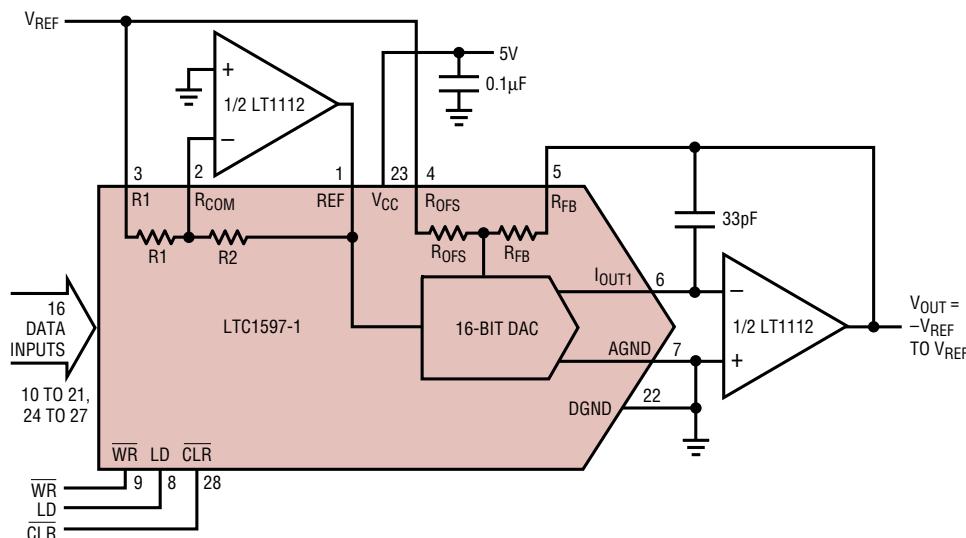Figure 2a. Bipolar Operation (4-Quadrant Multiplication) $V_{OUT} = -V_{REF}$ to V_{REF} 

Bipolar Offset Binary Code Table


DIGITAL INPUT BINARY NUMBER IN DAC REGISTER	ANALOG OUTPUT V_{OUT}	
	MSB	LSB
1111 1111 1111 1111	$V_{REF} (32,767/32,768)$	
1000 0000 0000 0001	$V_{REF} (1/32,768)$	
1000 0000 0000 0000	0V	
0111 1111 1111 1111	$-V_{REF} (1/32,768)$	
0000 0000 0000 0000	$-V_{REF}$	

1591/97 F02b

Figure 2b. Bipolar Operation (4-Quadrant Multiplication) $V_{OUT} = -V_{REF}$ to V_{REF}


TYPICAL APPLICATIONS

Noninverting Unipolar Operation (2-Quadrant Multiplication) $V_{OUT} = 0V$ to V_{REF}

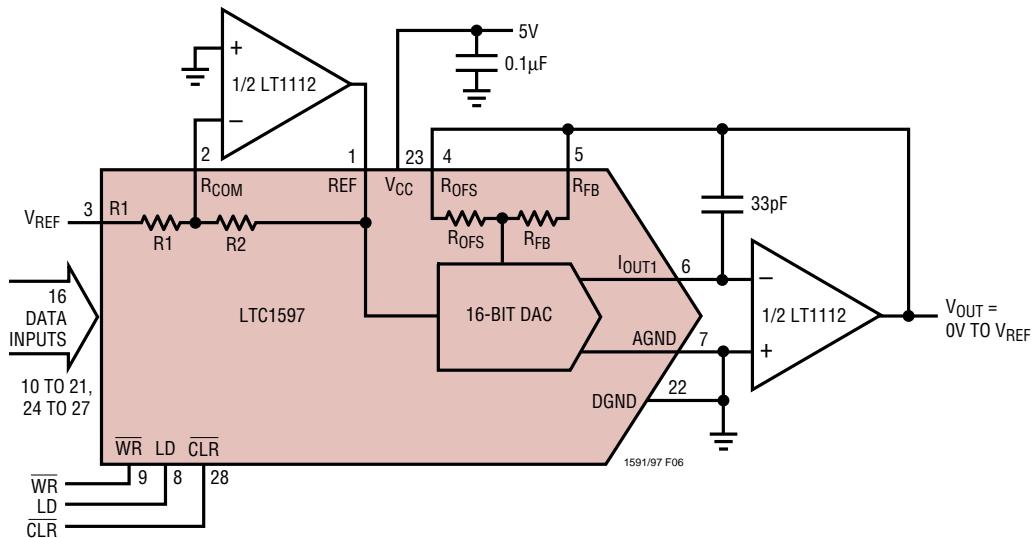


TYPICAL APPLICATIONS

16-Bit V_{OUT} DAC Programmable Unipolar/Bipolar Configuration

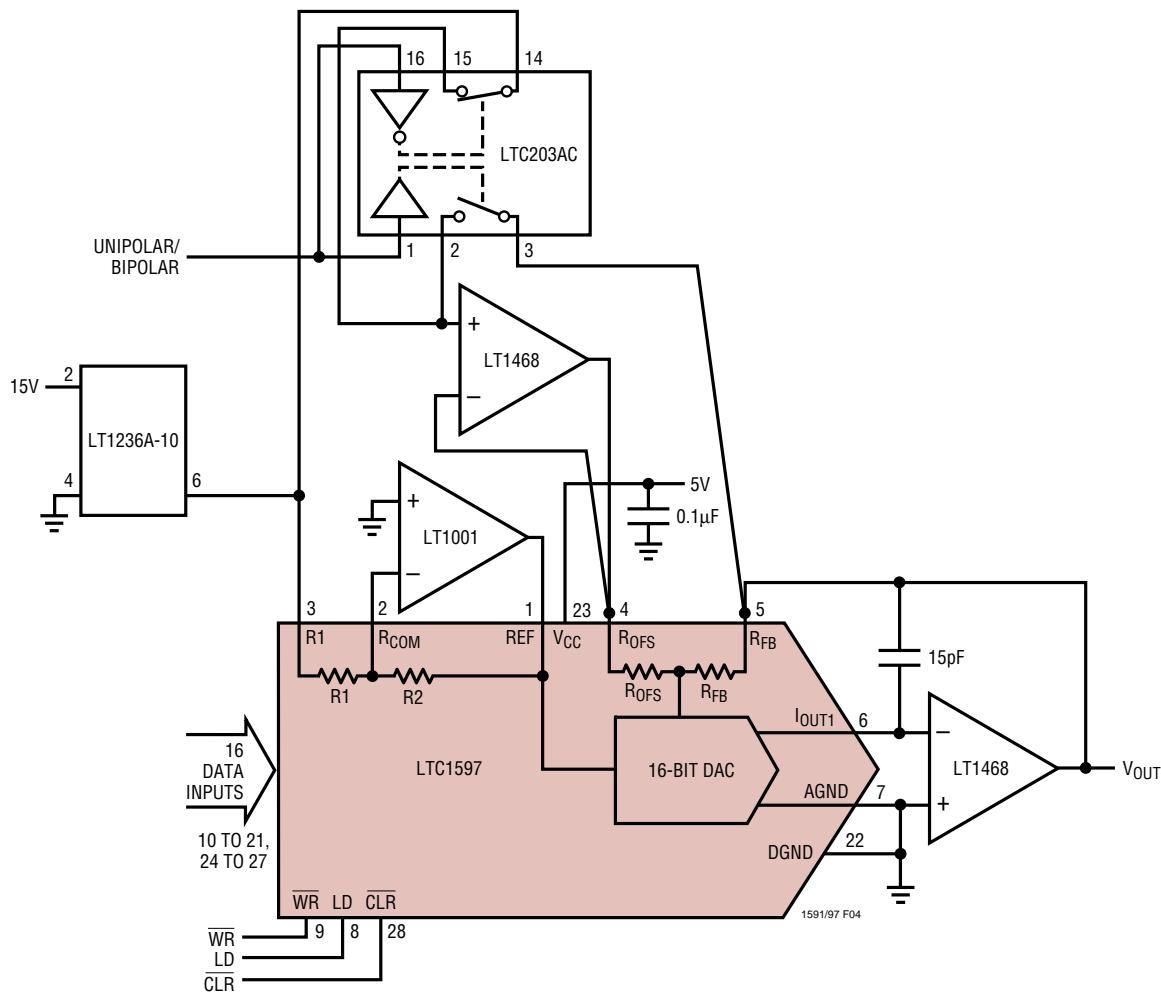

TYPICAL APPLICATIONS


Digital Waveform Generator

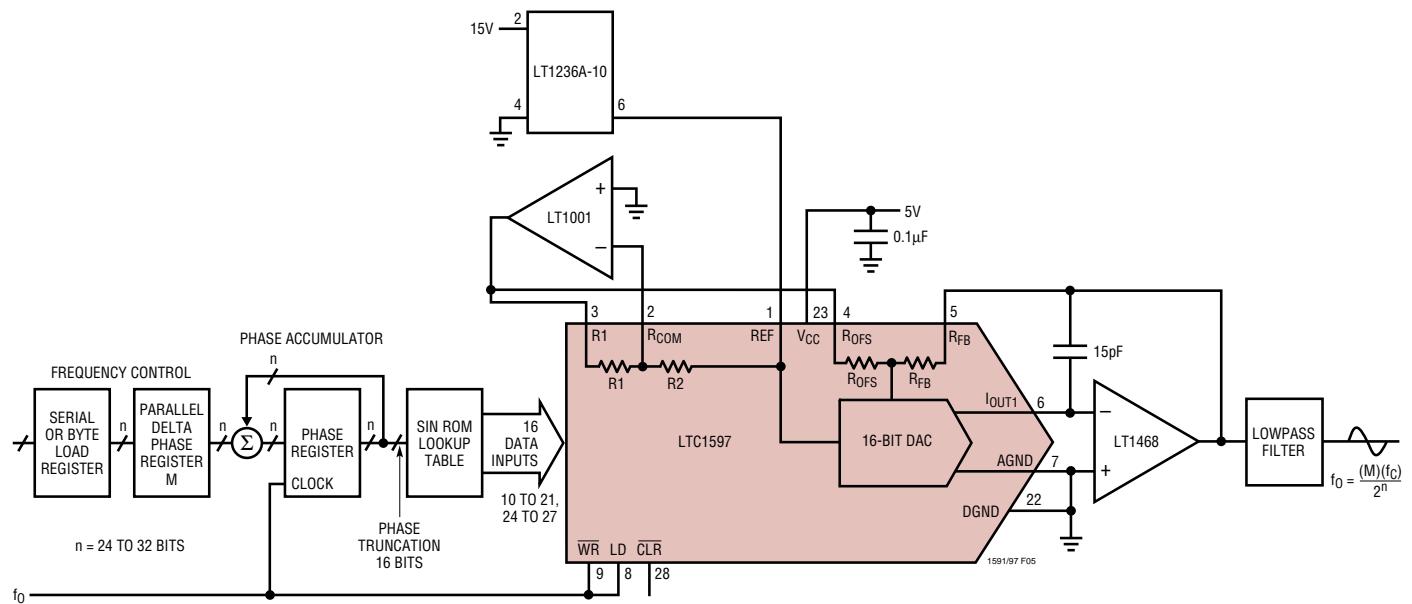

PACKAGE DESCRIPTION


Dimensions in inches (millimeters) unless otherwise noted.

G Package
28-Lead Plastic SSOP (0.209)
(LTC DWG # 05-08-1640)

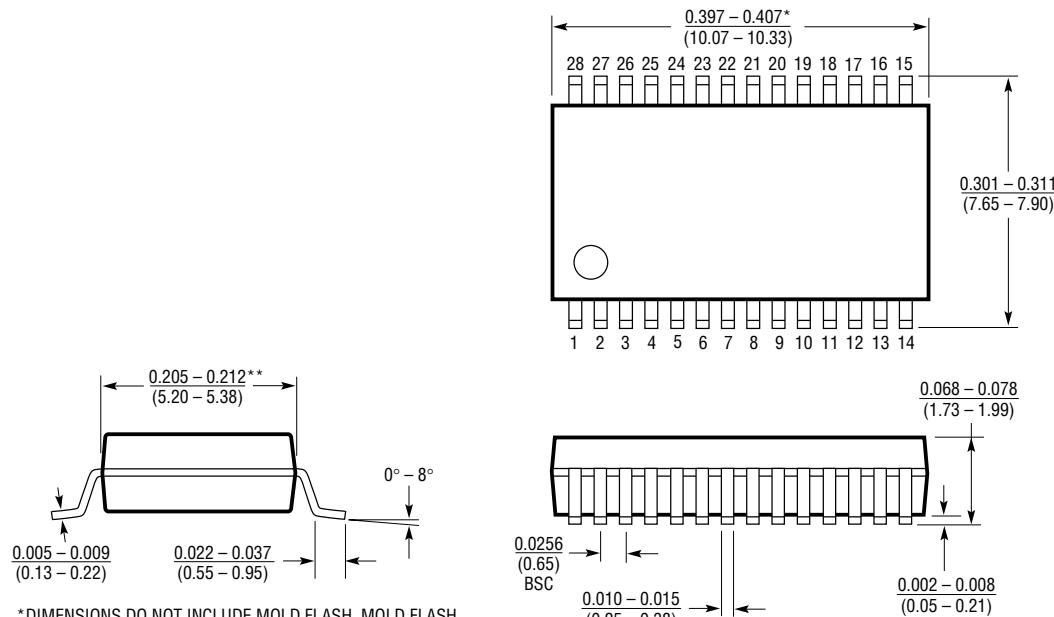

G28 SSOP 0694

N Package
28-Lead PDIP (Narrow 0.300)
(LTC DWG # 05-08-1510)

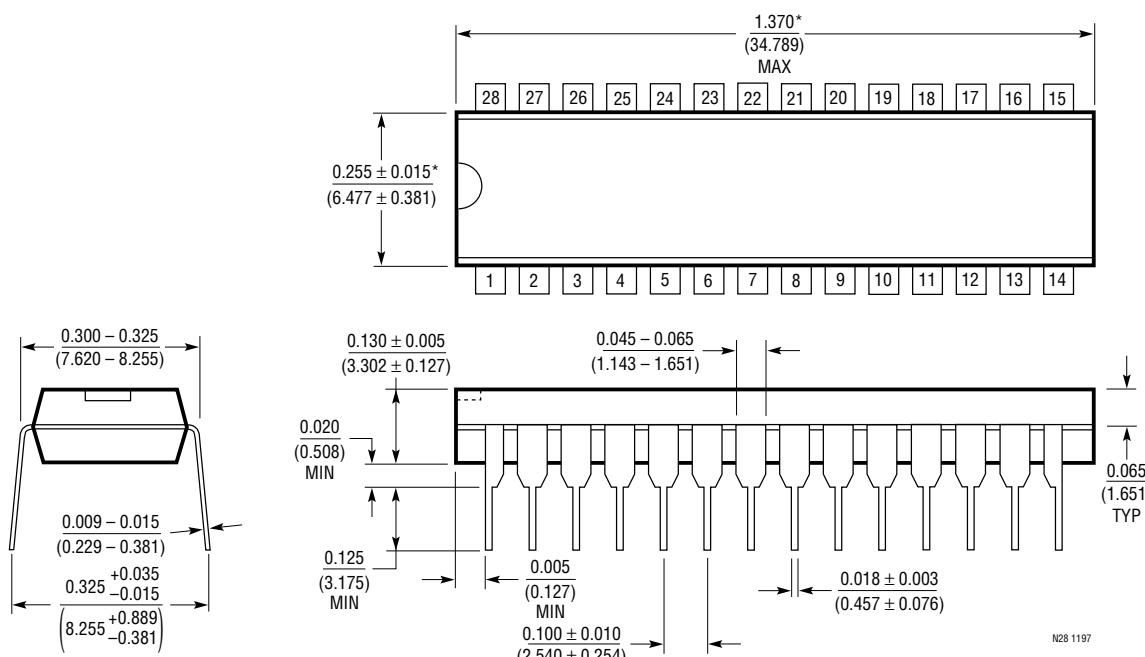


N28 1197

*THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.010 INCH (0.254mm)

LTC1591/LTC1597

TYPICAL APPLICATION

17-Bit Sign Magnitude DAC with Bipolar Zero Error of $140\mu V$ (0.92LSB at 17 Bits) at $25^\circ C$

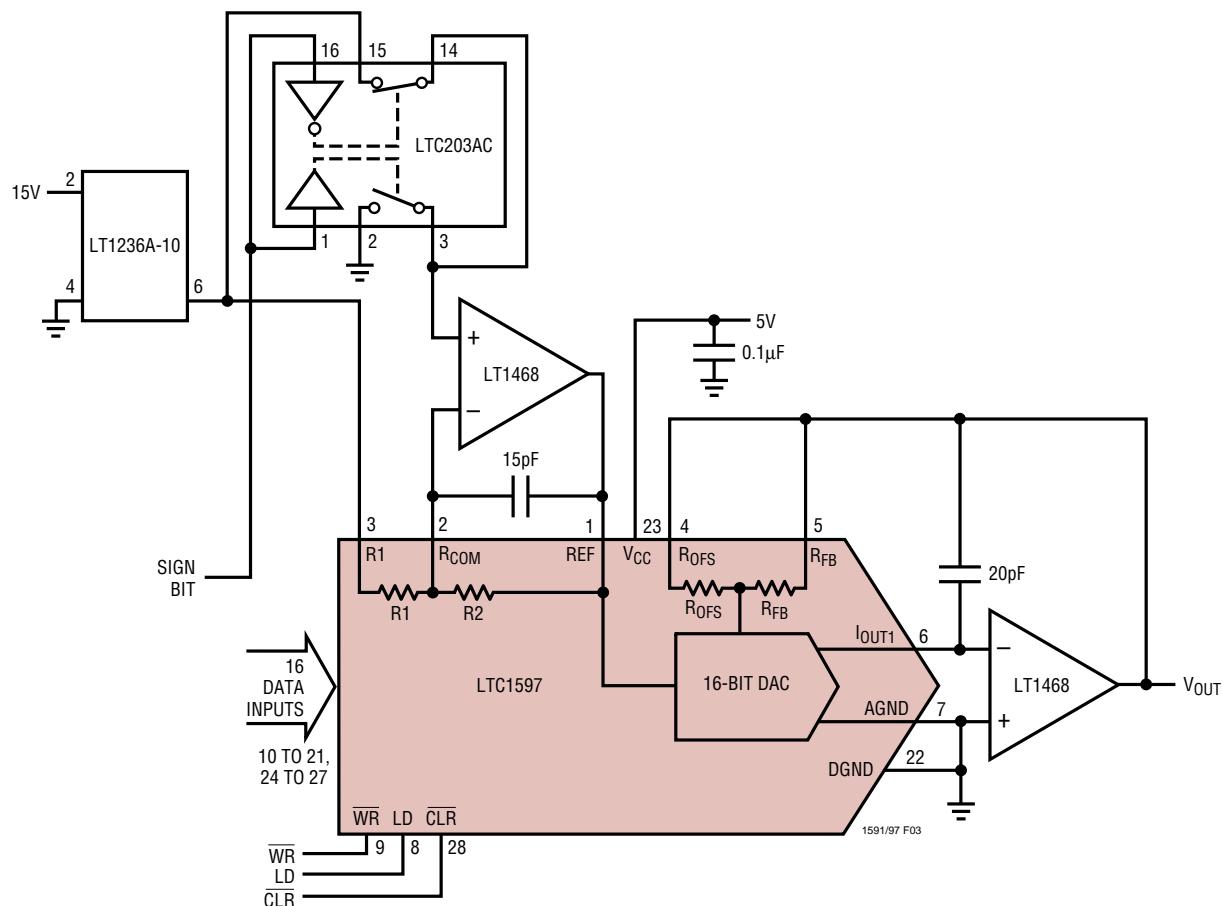

RELATED PARTS

PART NUMBER	DESCRIPTION	COMMENTS
Op Amps	LT1001	Precision Operational Amplifier
	LT1112	Dual Low Power, Precision Picoamp Input Op Amp
	LT1468	90MHz, 22V/μs, 16-Bit Accurate Op Amp
DAs	LTC1595/LTC1596	Serial 16-Bit Current Output DACs
	LTC1650	Serial 16-Bit Voltage Output DAC
	LTC1658	Serial 14-Bit Voltage Output DAC
ADCs	LTC1418	14-Bit, 200ksps 5V Sampling ADC
	LTC1604	16-Bit, 333ksps Sampling ADC
	LTC1605	Single 5V, 16-Bit 100ksps ADC
References	LT1236	Precision Reference