
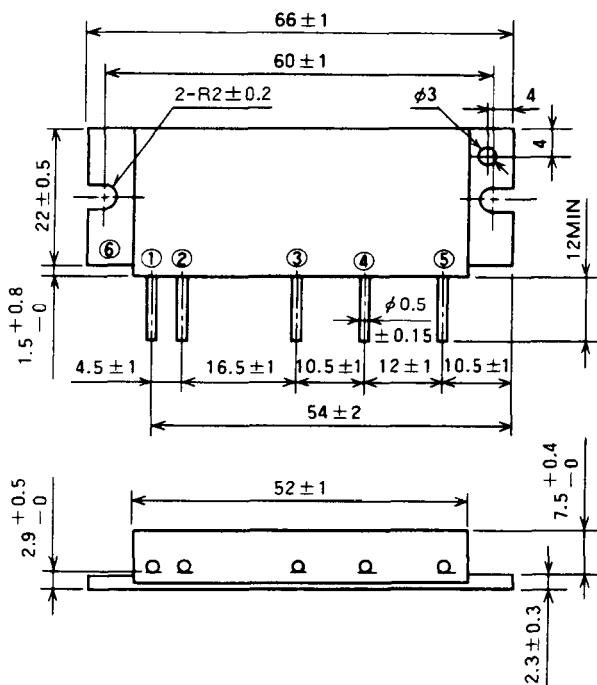


OUTLINE DRAWING

Dimensions in mm

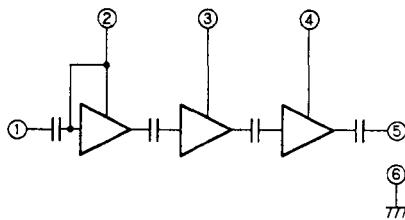

H3

BLOCK DIAGRAM

PIN :

- ① Pin : RF INPUT
- ② VCC1 : 1st. DC SUPPLY
- ③ VCC2 : 2nd. DC SUPPLY
- ④ VCC3 : 3rd. DC SUPPLY
- ⑤ PO : RF OUTPUT
- ⑥ GND : FIN

ABSOLUTE MAXIMUM RATINGS ($T_c = 25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Conditions	Ratings	Unit
Vcc	Supply voltage		17	V
Icc	Total current		4	A
Pin(max)	Input power	$Z_G = Z_L = 50 \Omega$	0.2	W
Po(max)	Output power	$Z_G = Z_L = 50 \Omega$	12	W
Tc(OP)	Operation case temperature		-30 to 110	°C
Tstg	Storage temperature		-40 to 110	°C

Note. Above parameters are guaranteed independently.

ELECTRICAL CHARACTERISTICS ($T_c = 25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Test conditions	Limits		Unit
			Min	Max	
f	Frequency range	$P_{in} = 0.1\text{W}$ $V_{cc} = 12.5$ $V_{ZG} = Z_L = 50 \Omega$	470	490	MHz
Po	Output power		7		W
η_T	Total efficiency		38		%
2fo	2nd. harmonic			-30	dBc
ρ_{in}	Input VSWR			2	-
-	Load VSWR tolerance	$V_{cc} = 15.2\text{V}$, $P_{in} = 7\text{W}$ (P_{in} : controlled) Load VSWR=20:1 (All phase), 2sec. $Z_G = 50 \Omega$	No degradation or destroy		-

Note. Above parameters, ratings, limits and conditions are subject to change.

NOV. '97