



17 μ A Max, Dual/Quad, Single-Supply, Precision Op Amps

General Description

The MAX478 and MAX479 are dual and quad micro-power, precision op amps available in 8-pin and 14-pin DIP and small-outline packages, respectively. Both devices feature an extremely low, 17 μ A max supply current per op amp, 70 μ V max offset voltage, 2.2 μ V/ $^{\circ}$ C max offset voltage drift (0.5 μ V/ $^{\circ}$ C typ), and 250pA max input offset current.


The MAX478 and MAX479 operate from a single supply. The input voltage range includes ground, and the output swings to within a few millivolts of ground, which eliminates pull-down resistors and saves power.

Both devices are optimized for single 3V and 5V supply operation, with guaranteed specifications at each supply voltage. Specifications for ± 15 V operation are also provided.

Applications

Battery- or Solar-Powered Systems:
 Portable Instrumentation
 Remote Sensor Amplifier
 Satellite Circuitry
 Micropower Sample-and-Hold
 Thermocouple Amplifier
 Micropower Filters
 Single Lithium Cell Powered Systems

Typical Operating Circuit

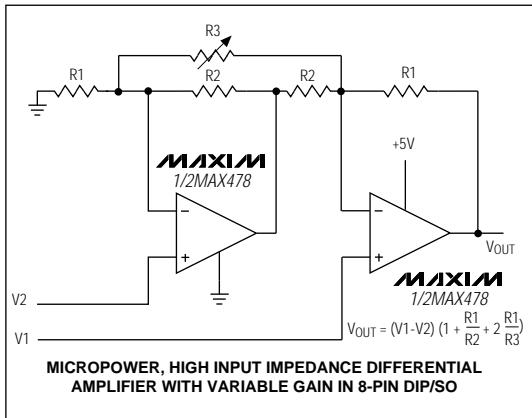

Features


- ♦ 17 μ A Max Supply Current (MAX478A/MAX479A)
- ♦ 70 μ V Max Offset Voltage (MAX478A)
- ♦ Single-Supply Operation:
 Input Voltage Range Includes Ground
 Output Swings to Ground While Sinking Current
 No Pull-Down Resistors Required
- ♦ Dual Op Amp in 8-Pin DIP/SO Package (MAX478), Quad Op Amp in 14-Pin DIP/SO Package (MAX479)
- ♦ 250pA Max Input Offset Current (MAX478A/MAX479A)
- ♦ 0.5 μ V/ $^{\circ}$ C Offset-Voltage Drift
- ♦ Output Sources and Sinks 5mA Load Current

Ordering Information

PART	TEMP. RANGE	PIN-PACKAGE
MAX478ACPA	0°C to +70°C	8 Plastic DIP
MAX478CPA	0°C to +70°C	8 Plastic DIP
MAX478CSA	0°C to +70°C	8 SO
MAX478C/D	0°C to +70°C	Dice*
MAX478EPA	-40°C to +85°C	8 Plastic DIP
MAX478ESA	-40°C to +85°C	8 SO
MAX479ACPD	0°C to +70°C	14 Plastic DIP
MAX479CPD	0°C to +70°C	14 Plastic DIP
MAX479CSD	0°C to +70°C	14 SO
MAX479EPD	-40°C to +85°C	14 Plastic DIP
MAX479ESD	-40°C to +85°C	14 SO

* Dice are specified at $T_A = +25^{\circ}\text{C}$, DC parameters only.

Pin Configurations

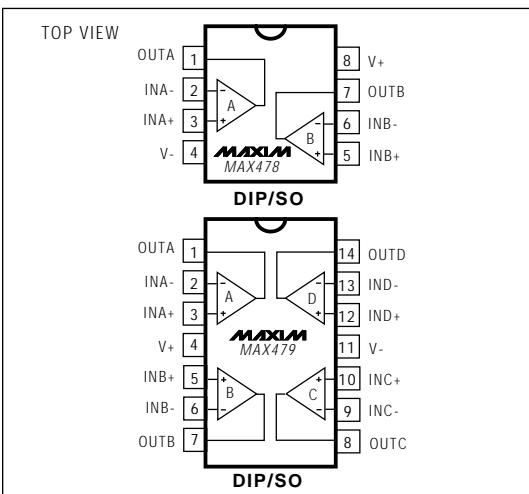

17 μ A Max, Dual/Quad, Single-Supply, Precision Op Amps

ABSOLUTE MAXIMUM RATINGS

Supply Voltage	±22V	Operating Temperature Ranges:		
Differential Input Voltage	±30V	MAX47_ACP/C.....0°C to +70°C		
Input Voltage	Equal to Positive Supply Voltage 5V Below Negative Supply Voltage	MAX47_E.....-40°C to +85°C		
Output Short-Circuit Duration	Continuous	Storage Temperature Range-65°C to +150°C		
Continuous Power Dissipation ($T_A = +70^\circ\text{C}$):		Lead Temperature (soldering, 10sec).....+300°C		
8-Pin Plastic DIP (derate 9.09mW/ $^\circ\text{C}$ above $+70^\circ\text{C}$)	727mW			
14-Pin Plastic DIP (derate 10.00mW/ $^\circ\text{C}$ above $+70^\circ\text{C}$) ..	800mW			
14-Pin Wide SO (derate 9.52mW/ $^\circ\text{C}$ above $+70^\circ\text{C}$) ...	762mW			

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS: 5V

($V_S = 5\text{V}$, 0V , $V_{CM} = 0.1\text{V}$, $V_O = 1.4\text{V}$, $T_A = +25^\circ\text{C}$, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MAX478AC			MAX478C/E			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
Input Offset Voltage	V_{OS}	MAX478ACP/CP/EP	30	70		40	120		μV
		MAX479ACP/CP/EP	35	100		40	150		
		MAX478CS/ES				80	180		
		MAX479CS/ES				90	250		
Long-Term Input Offset-Voltage Stability	$\frac{\Delta V_{OS}}{\Delta \text{Time}}$			0.5			0.6		$\mu\text{V}/\text{Mo.}$
Input Offset Current	I_{OS}		0.05	0.25		0.05	0.35		nA
Input Bias Current	I_B		3	5		3	6		nA
Input Noise Voltage	e_n	0.1Hz to 10Hz (Note 1)	0.9	2.0		0.9			$\mu\text{V}_{\text{p-p}}$
Input Noise Voltage Density		$f_0 = 10\text{Hz}$ (Note 1)	50	75		50			$\text{nV}/\sqrt{\text{Hz}}$
		$f_0 = 1000\text{Hz}$ (Note 1)	49	65		49			
Input Noise Current	i_n	0.1Hz to 10Hz (Note 1)	1.5	2.5		1.5			$\text{pA}_{\text{p-p}}$
Input Noise Current Density		$f_0 = 10\text{Hz}$ (Note 1)	0.03	0.07		0.03			$\text{pA}/\sqrt{\text{Hz}}$
		$f_0 = 1000\text{Hz}$	0.01			0.01			
Input Resistance	R_{IN}	Differential mode (Note 1)	0.8	2.0		0.6	2.0		$\text{G}\Omega$
		Common mode		12			12		
Input Voltage Range	$V_{IN (\text{CM})}$	Upper limit	3.5	3.9		3.5	3.9		V
		Lower limit	0	-0.3		0	-0.3		
Common-Mode Rejection Ratio	CMRR	$V_{CM} = 0\text{V}$ to 3.5V	93	103		90	102		dB
Power-Supply Rejection Ratio	PSRR	$V_S = 2.2\text{V}$ to 12V	94	104		92	104		dB
Large-Signal Voltage Gain	A_{VOL}	$V_O = 0.03\text{V}$ to 4V , no load (Note 1)	140	700		110	700		V/mV
		$V_O = 0.03\text{V}$ to 3.5V , $R_L = 50\text{k}\Omega$	80	200		70	200		

17µA Max, Dual/Quad, Single-Supply, Precision Op Amps

ELECTRICAL CHARACTERISTICS: 5V (continued)

($V_S = 5V$, $0V$, $V_{CM} = 0.1V$, $V_O = 1.4V$, $T_A = +25^\circ C$, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MAX478AC MAX479AC			MAX478C/E MAX479C/E			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
Output Voltage Swing	V_{OUT}	Output low, no load	6.5	9.0		6.5	9.0		mV
		Output low, $2k\Omega$ to GND	0.2	0.6		0.2	0.6		
		Output low, $I_{SINK} = 100\mu A$	120	160		120	160		
		Output high, no load	4.2	4.4		4.2	4.4		V
		Output high, $2k\Omega$ to GND	3.5	3.8		3.5	3.8		
Slew Rate	SR	$A_V = +1$, $C_L = 1pF$ (Note 1)	0.013	0.025		0.013	0.025		V/µs
Gain-Bandwidth Product	GBW	$f_O \leq 5kHz$	60			60			kHz
Supply Current per Amplifier	I_S		13	18		14	21		µA
		$V_S = \pm 1.5V$, $V_O = 0V$	12	17		13	20		
Channel Separation		$\Delta V_{IN} = 3V$, $R_L = 10k\Omega$	130			130			dB
Minimum Supply Voltage	V_S	(Note 2)	2.0	2.2		2.0	2.2		V

ELECTRICAL CHARACTERISTICS: 5V

($V_S = 5V$, $0V$, $V_{CM} = 0.1V$, $V_O = 1.4V$, $T_A = 0^\circ C$ to $+70^\circ C$, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MAX478AC MAX479AC			MAX478C MAX479C			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
Input Offset Voltage	V_{OS}	MAX478ACP/CP	50	170		65	250		µV
		MAX479ACP/CP	60	200		70	290		
		MAX478CS				120	300		
		MAX479CS				130	400		
Input Offset Voltage Drift	$\frac{\Delta V_{OS}}{\Delta T}$	MAX47_AC/CP (Note 1)	0.5	2.2		0.6	3.0		µV/°C
		MAX47_CS (Note 1)				0.8	4.5		
Input Offset Current	I_{OS}		0.06	0.35		0.06	0.50		nA
Input Bias Current	I_B		3	6		3	7		nA
Common-Mode Rejection Ratio	CMRR	$V_{CM} = 0V$ to $3.4V$	90	101		86	100		dB
Power-Supply Rejection Ratio	PSRR	$V_S = 2.5V$ to $12V$	90	102		88	102		dB
Large-Signal Voltage Gain	A_{VOL}	$V_O = 0.05V$ to $4V$, no load (Note 1)	105	500		80	500		V/mV
		$V_O = 0.05V$ to $3.5V$, $R_L = 50k\Omega$	55	160		45	160		
Output Voltage Swing	V_{OUT}	Output low, no load	8	11		8	11		mV
		Output low, $I_{SINK} = 100\mu A$	140	190		140	190		
		Output high, no load	4.1	4.3		4.1	4.3		V
		Output high, $2k\Omega$ to GND	3.3	3.8		3.3	3.8		
Supply Current per Amplifier	I_S		14	21		15	24		µA

17 μ A Max, Dual/Quad, Single-Supply, Precision Op Amps

ELECTRICAL CHARACTERISTICS: 5V

($V_S = 5V$, 0V, $V_{CM} = 0.1V$, $V_O = 1.4V$, $T_A = -40^\circ C$ to $+85^\circ C$, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MAX478EP MAX479EP			MAX478ES MAX479ES			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
Input Offset Voltage	V_{OS}	MAX478		80	315		150	400	μ V
		MAX479		80	345		160	530	
Input Offset Voltage Drift	$\frac{\Delta V_{OS}}{\Delta T}$	(Note 1)		0.6	3.0		0.8	4.5	μ V/ $^\circ$ C
Input Offset Current	I_{OS}			0.07	0.7		0.07	0.7	nA
Input Bias Current	I_B			4	8		4	8	nA
Common-Mode Rejection Ratio	CMRR	$V_{CM} = 0.05V$ to $3.2V$	84	98		84	98		dB
Power-Supply Rejection Ratio	PSRR	$V_S = 3.0V$ to $12V$	86	100		86	100		dB
Large-Signal Voltage Gain	A_{VOL}	$V_O = 0.05V$ to $4V$, no load (Note 1)	55	350		55	350		V/mV
		$V_O = 0.05V$ to $3.5V$, $R_L = 50k\Omega$	35	130		35	130		
Output Voltage Swing	V_{OUT}	Output low, no load		9	13		9	13	mV
		Output low, $I_{SINK} = 100\mu A$	160	220		160	220		
		Output high, no load	3.9	4.2		3.9	4.2		V
		Output high, $2k\Omega$ to GND	3.0	3.7		3.0	3.7		
Supply Current per Amplifier	I_S			15	27		15	27	μ A

17 μ A Max, Dual/Quad, Single-Supply, Precision Op Amps

ELECTRICAL CHARACTERISTICS: 3V

($V_S = 3V, 0V$, $V_{CM} = 0.1V$, $V_O = 0.8V$, $T_A = +25^\circ C$, unless otherwise noted.)

MAX478/MAX479

PARAMETER	SYMBOL	CONDITIONS	MAX478AC MAX479AC			MAX478C/E MAX479C/E			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
Input Offset Voltage	V_{OS}	MAX478ACP/CP/EP		30	90		40	140	μV
		MAX479ACP/CP/EP		35	120		40	170	
		MAX478CS/ES					80	200	
		MAX479CS/ES					90	270	
Input Offset Current	I_{OS}			0.05			0.05		nA
Input Bias Current	I_B			3			3		nA
Input Noise Voltage	e_N	0.1Hz to 10Hz		1.0			1.0		μV_{p-p}
Input Voltage Range	$V_{IN} (CM)$	Upper limit	1.7	1.9		1.7	1.9		V
		Lower limit	0	-0.3		0	-0.3		
Common-Mode Rejection Ratio	CMRR	$V_{CM} = 0V$ to 1.7V	93	103		90	102		dB
Power-Supply Rejection Ratio	PSRR	$V_S = 2.2V$ to 12V	94	104		92	104		dB
Large-Signal Voltage Gain	A_{VOL}	$V_O = 0.03V$ to 2V, no load (Note 1)	100	600		100	600		V/mV
		$V_O = 0.03V$ to 1.5V, $R_L = 50k\Omega$	60	180		60	180		
Output Voltage Swing	V_{OUT}	Output low, no load	6	9		6	9		mV
		Output low, 2k Ω to GND	0.2	0.6		0.2	0.6		
		Output high, no load	2.2	2.4		2.2	2.4		V
		Output high, 2k Ω to GND	1.8	2.0		1.8	2.0		
Gain-Bandwidth Product	GBW	$f_O \leq 5kHz$		50			50		kHz
Supply Current per Amplifier	I_S		12	17		13	20		μA
Minimum Supply Voltage	V_S				2.2		2.2		V
		With 300 μV V_{OS} degradation		1.7			1.7		

*17μA Max, Dual/Quad, Single-Supply,
Precision Op Amps*

ELECTRICAL CHARACTERISTICS: ±15V

($V_S = \pm 15V$, $T_A = +25^\circ C$, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MAX478AC MAX479AC			MAX478C/E MAX479C/E			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
Input Offset Voltage	V_{OS}		80	350		100	480		μV
Input Offset Current	I_{OS}		0.05	0.25		0.05	0.35		nA
Input Bias Current	I_B		3	5		3	6		nA
Input Voltage Range	$V_{IN} (\text{CM})$	Upper limit	13.5	13.9		13.5	13.9		V
		Lower limit	-15.0	-15.3		-15.0	-15.3		
Common-Mode Rejection Ratio	CMRR	$V_{CM} = +13.5V, -15V$	97	106		94	106		dB
Power-Supply Rejection Ratio	PSRR	$V_S = 5V, 0V$ to ±18V	96	112		94	112		dB
Large-Signal Voltage Gain	A_{VOL}	$V_O = \pm 10V, R_L = 50k\Omega$	300	1200		250	1000		V/mV
		$V_O = \pm 10V$, no load	600	2500		400	2500		
Output Voltage Swing	V_{OUT}	$R_L = 50k\Omega$	$\pm 13.0 \pm 14.2$		$\pm 13.0 \pm 14.2$				V
		$R_L = 2k\Omega$	$\pm 11.0 \pm 12.7$		$\pm 11.0 \pm 12.7$				
Slew Rate	SR	$A_V = +1V, C_L = 15pF$	0.02	0.04		0.02	0.04		V/μs
Gain-Bandwidth Product	GBW	$f_O \leq 5\text{kHz}$	85		85				kHz
Supply Current per Amplifier	I_S		16	21		17	25		μA

*17µA Max, Dual/Quad, Single-Supply,
Precision Op Amps*

ELECTRICAL CHARACTERISTICS: ±15V

($V_S = \pm 15V$, $T_A = 0^\circ C$ to $+70^\circ C$, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MAX478AC MAX479AC			MAX478C MAX479C			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
Input Offset Voltage	V_{OS}		100	480		130	660		µV
Input Offset-Voltage Drift	$\frac{\Delta V_{OS}}{\Delta T}$	MAX47_ACP/CP (Note 1)	0.6	2.8		0.7	4.0		µV/°C
		MAX47_CS (Note 1)				0.9	5.5		
Input Offset Current	I_{OS}		0.06	0.35		0.06	0.35		nA
Input Bias Current	I_B		3	6		3	7		nA
Large-Signal Voltage Gain	A_{VOL}	$V_O = \pm 10V$, $R_L = 50k\Omega$	200	800		150	750		V/mV
Common-Mode Rejection Ratio	CMRR	$V_{CM} = +13V$, -15V	94	104		91	104		dB
Power-Supply Rejection Ratio	PSRR	$V_S = 5V$, 0V to $\pm 18V$	93	110		91	110		dB
Output Voltage Swing	V_{OUT}	$R_L = 5k\Omega$	±11.0	±13.5		±11.0	±13.5		V
Supply Current per Amplifier	I_S		17	24		18	28		µA

17 μ A Max, Dual/Quad, Single-Supply, Precision Op Amps

ELECTRICAL CHARACTERISTICS: $\pm 15V$

($V_S = \pm 15V$, $T_A = -40^\circ C$ to $+85^\circ C$, unless otherwise noted.)


PARAMETER	SYMBOL	CONDITIONS	MAX478EP MAX479EP			MAX478ES MAX479ES			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
Input Offset Voltage	V_{OS}		130	740		130	740		μV
Input Offset-Voltage Drift	$\frac{\Delta V_{OS}}{\Delta T}$	(Note 1)	0.7	4.0		0.9	5.5		$\mu V/C$
Input Offset Current	I_{OS}		0.07	0.70		0.07	0.70		nA
Input Bias Current	I_B		4	8		4	8		nA
Large-Signal Voltage Gain	A_{VOL}	$V_O = \pm 10V$, $R_L = 50k\Omega$	100	500		100	500		V/mV
Common-Mode Rejection Ratio	CMRR	$V_{CM} = +13V$, $-14.9V$	88	103		88	103		dB
Power-Supply Rejection Ratio	PSRR	$V_S = 5V$, 0V to $\pm 18V$	88	109		88	109		dB
Output Voltage Swing	V_{OUT}	$R_L = 5k\Omega$	± 11.0	± 13.5		± 11.0	± 13.5		V
Supply Current per Amplifier	I_S		19	30		19	30		μA

Note 1: Guaranteed by design.

Note 2: Power-supply rejection ratio is measured at the minimum supply voltage. The op amps actually work at 1.7V supply, but with additional input offset-voltage skew.









17 μ A Max, Dual/Quad, Single-Supply, Precision Op Amps

Typical Operating Characteristics

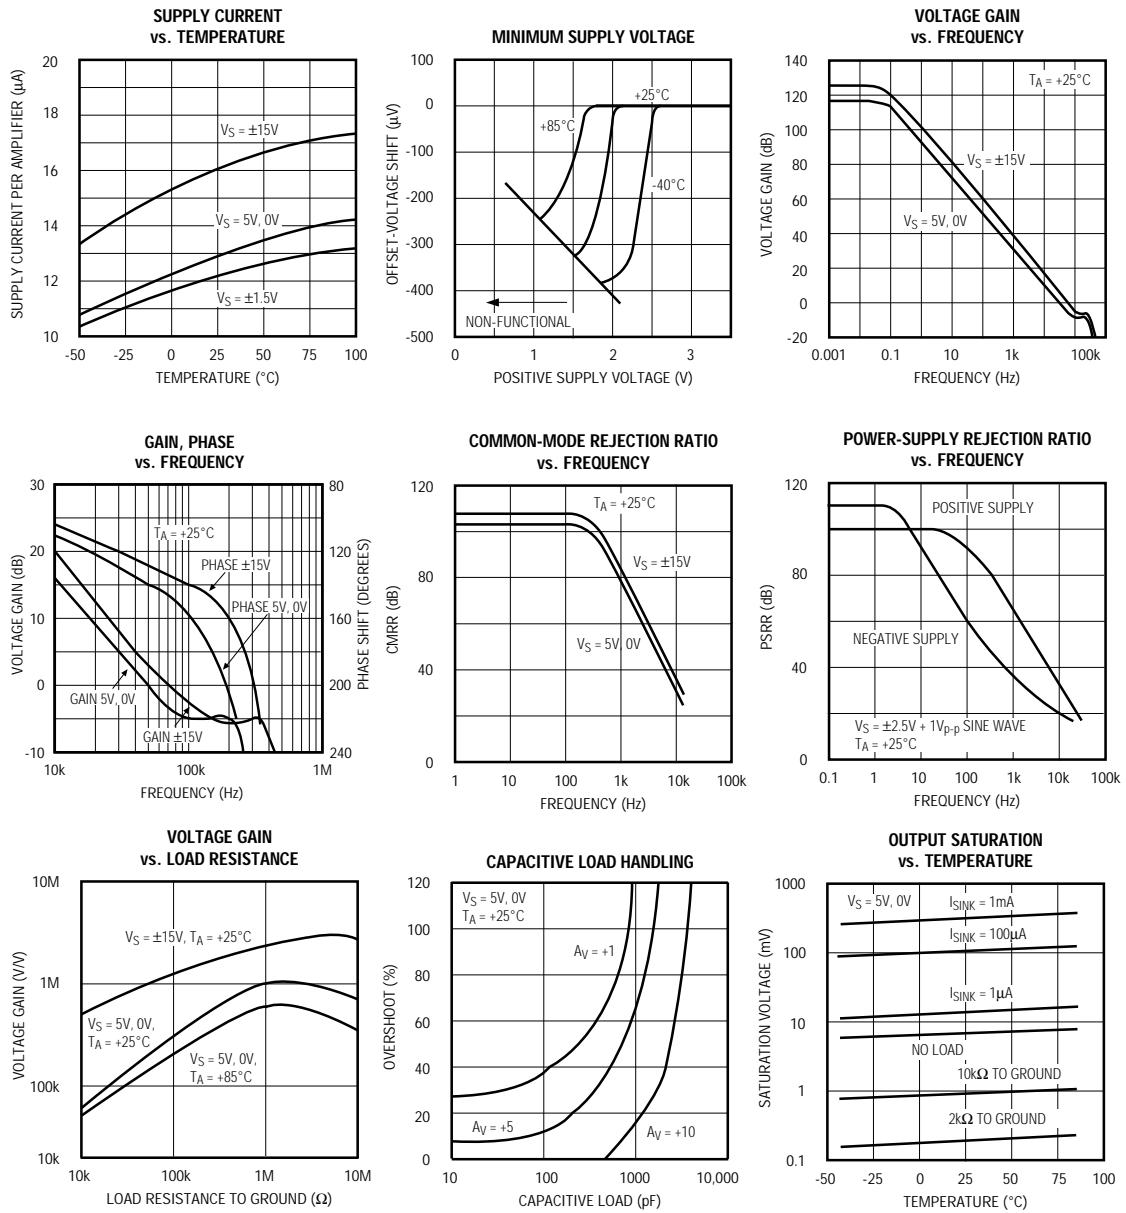


17 μ A Max, Dual/Quad, Single-Supply, Precision Op Amps

Typical Operating Characteristics (continued)

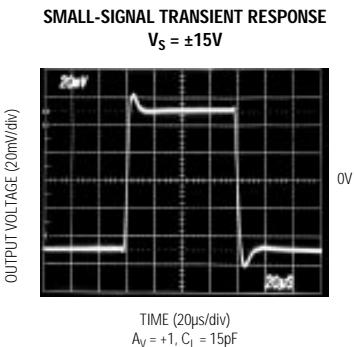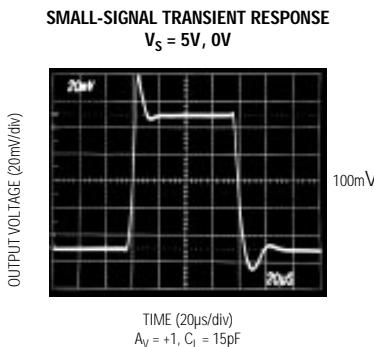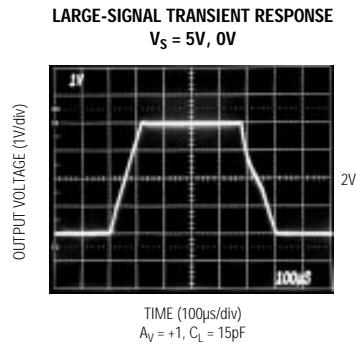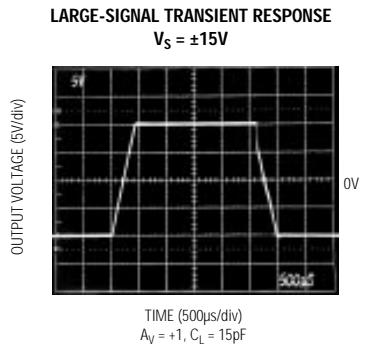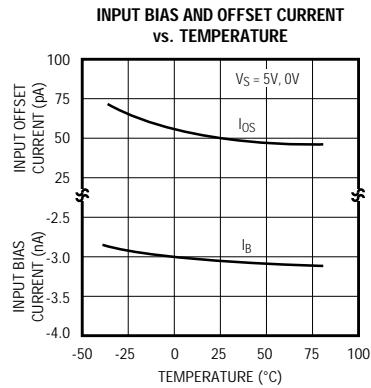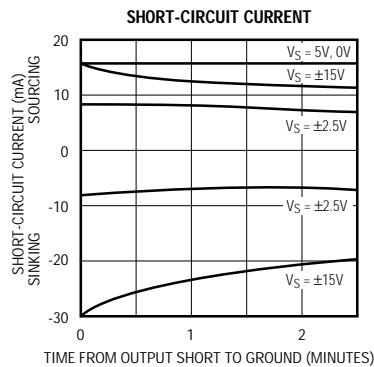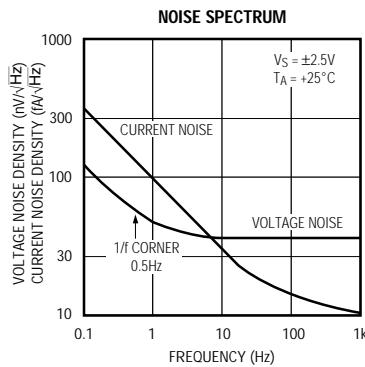


17 μ A Max, Dual/Quad, Single-Supply, Precision Op Amps


Typical Application Circuit

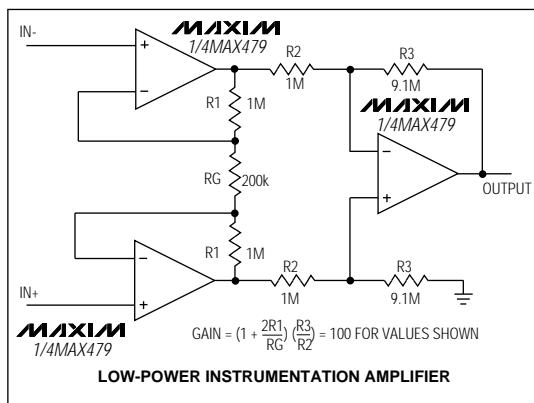

Chip Topography


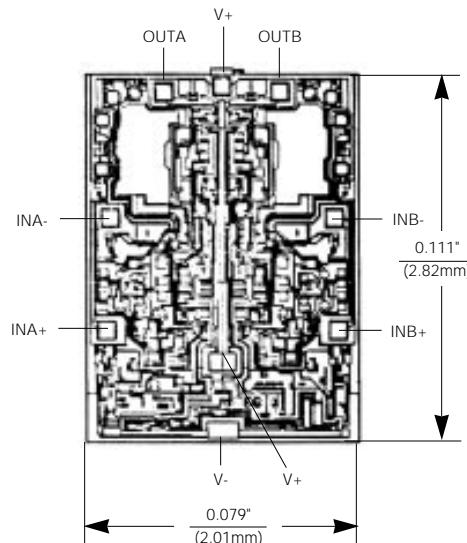


Package Information

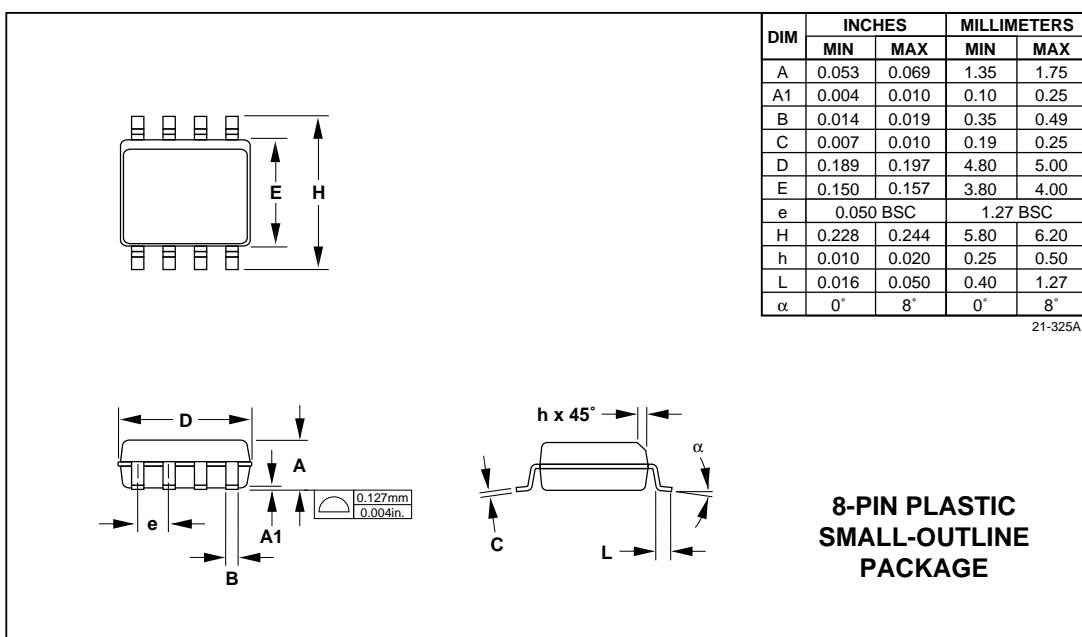

17 μ A Max, Dual/Quad, Single-Supply, Precision Op Amps

Package Information (continued)

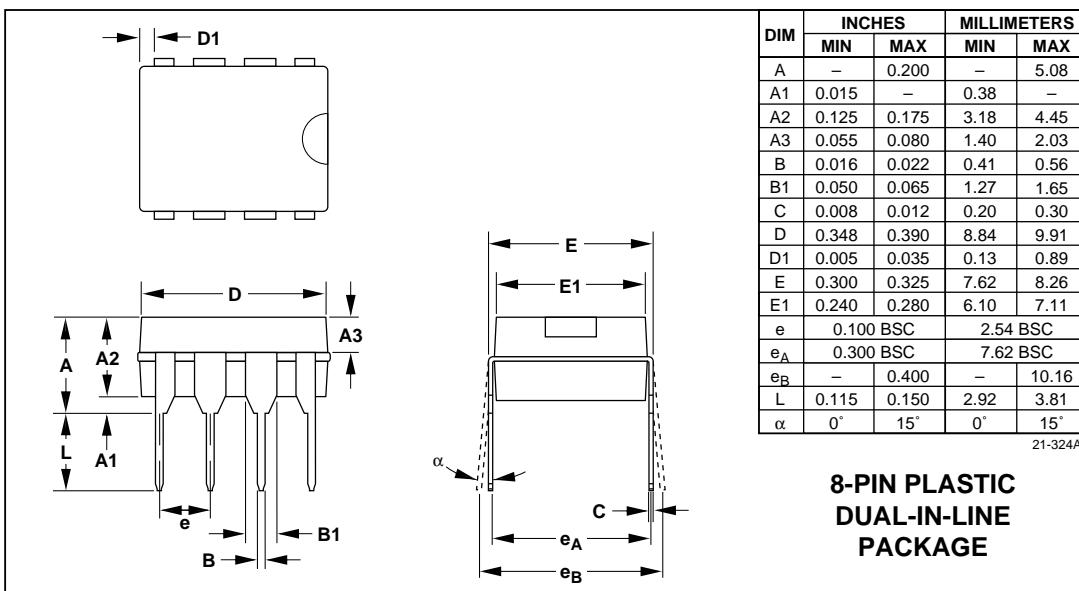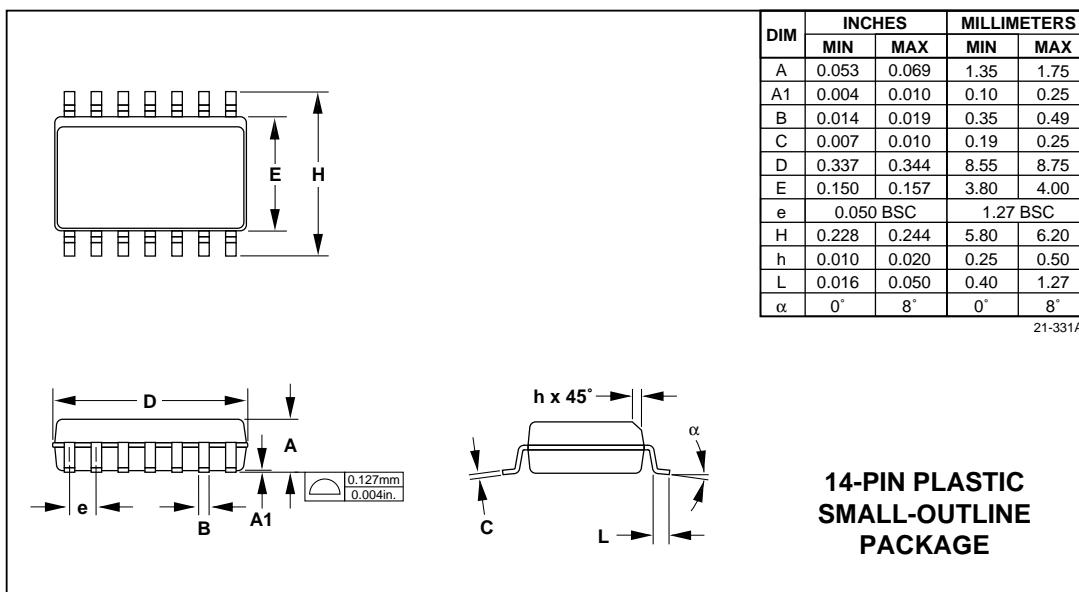

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

12 _____ Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 (408) 737-7600

© 1993 Maxim Integrated Products

Printed USA

MAXIM

is a registered trademark of Maxim Integrated Products.