




J-FET INPUT DUAL OP-AMPs

- LOW POWER CONSUMPTION
- WIDE COMMON-MODE AND DIFFERENTIAL VOLTAGE RANGE
- LOW INPUT BIAS AND OFFSET CURRENT
- OUTPUT SHORT-CIRCUIT PROTECTION
- HIGH INPUT IMPEDANCE J-FET INPUT STAGE
- INTERNAL FREQUENCY COMPENSATION
- LATCH UP FREE OPERATION
- HIGH SLEW RATE : 13 V/ μ s (typ)

DESCRIPTION


These circuits are high speed J-FET input dual operational amplifiers incorporating well matched, high voltage J-FET and bipolar transistors in a monolithic integrated circuit.

The devices feature high slew rates, low input bias and offset current, and low offset voltage temperature coefficient.

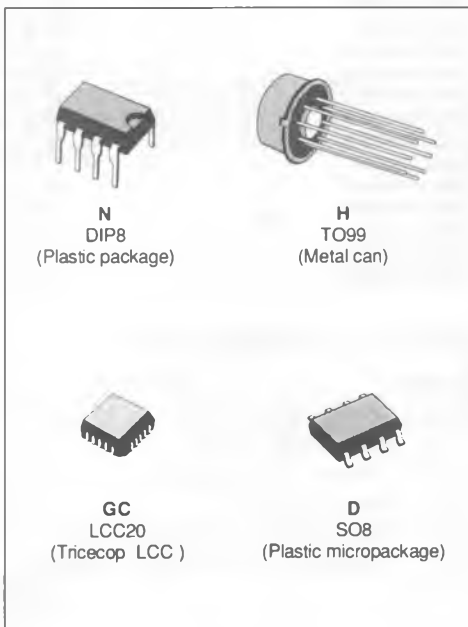


PIN CONNECTIONS (Top views)

**DIP8
SO8**



- 1 - Output 1
- 2 - Inverting input 1
- 3 - Non-inverting input 1
- 4 - V_{CC}
- 5 - Non-inverting input 2
- 6 - Inverting input 2
- 7 - Output 2
- 8 - V_{CC}

TO99



LCC20



- | | |
|---------------------------|----------------------------|
| 1 - NC | 11 - NC |
| 2 - Output 1 | 12 - Non-inverting input 2 |
| 3 - NC | 13 - NC |
| 4 - NC | 14 - NC |
| 5 - Inverting input 1 | 15 - Inverting input 2 |
| 6 - NC | 16 - NC |
| 7 - Non-inverting input 1 | 17 - Output 2 |
| 8 - NC | 18 - NC |
| 9 - NC | 19 - NC |
| 10 - V_{CC} | 20 - V_{CC} |

ORDER CODES


Part Number	Temperature	Package
MC35002GC	– 55 °C to + 125 °C	LCC
MC35002AGC	– 55 °C to + 125 °C	LCC
MC35002BGC	– 55 °C to + 125 °C	LCC
MC35002H	– 55 °C to + 125 °C	METAL CAN
MC35002AH	– 55 °C to + 125 °C	METAL CAN
MC35002BH	– 55 °C to + 125 °C	METAL CAN
MC33002N	– 40 °C to + 105 °C	DIP8
MC33002AN	– 40 °C to + 105 °C	DIP8
MC33002BN	– 40 °C to + 105 °C	DIP8
MC33002D	– 40 °C to + 105 °C	SO8
MC33002AD	– 40 °C to + 105 °C	SO8
MC33002BD	– 40 °C to + 105 °C	SO8
MC34002N	0 °C to + 70 °C	DIP8
MC34002AN	0 °C to + 70 °C	DIP8
MC34002BN	0 °C to + 70 °C	DIP8
MC34002D	0 °C to + 70 °C	SO8
MC34002AD	0 °C to + 70 °C	SO8
MC34002BD	0 °C to + 70 °C	SO8

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V _{CC}	Supply Voltage (note 1)	± 18	V
V _I	Input Voltage (note 3)	± 15	V
V _{CC}	Diff. Input Voltage (note 2)	± 30	V
P _{tot}	Power Dissipation	680	mW
	Output Short-circuit Duration (note 4)	Infinite	
T _{oper}	Operating Free Air Temperature Range MC34002, A, B MC33002, A, B MC35002, A, B	0 to 70 – 40 to 105 – 55 to 125	°C
T _{stg}	Storage Temperature Range	– 65 to 150	°C

- Notes :
1. All voltage values, except differential voltage, are with respect to the zero reference level (ground) of the supply voltages where the zero reference level is the midpoint between V_{CC} and V_{CC}.
 2. Differential voltages are at the non-inverting input terminal with respect to the inverting input terminal.
 3. The magnitude of the input voltage must never exceed the magnitude of the supply voltage or 15 volts, whichever is less.
 4. The output may be shorted to ground or to either supply. Temperature and/or supply voltages must be limited to ensure that the dissipation rating is not exceeded.

SCHEMATIC DIAGRAM

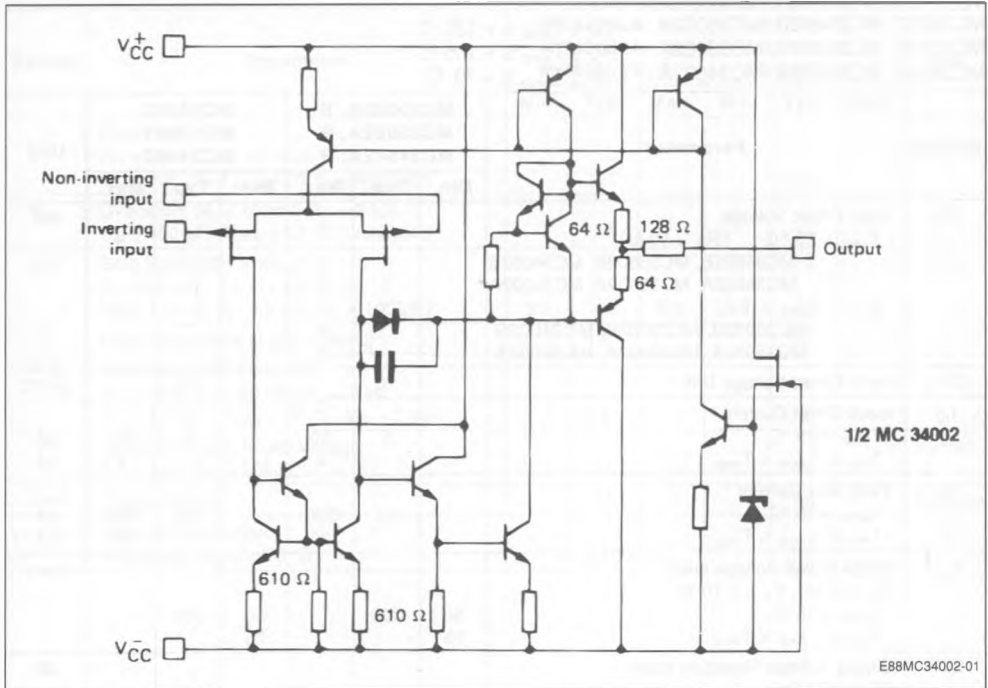

Case	Outputs	Non-inverting Inputs	Inverting Inputs	V_{CC}	V_{CC}	N.C.
DIP8 SO8 TO99	1, 7	3, 5	2, 6	4	8	
LCC20	2, 17	7, 12	5, 15	10	20	*

* LCC20 : Other pins are not connected.

ELECTRICAL CHARACTERISTICS


V_{CC} = ± 15 V (unless otherwise specified)
MC35002, MC35002B, MC35002A - 55 ≤ T_{amb} ≤ + 125 °C
MC33002, MC33002B, MC33002A - 40 ≤ T_{amb} ≤ + 105 °C
MC34002, MC34002B, MC34002A 0 ≤ T_{amb} ≤ + 70 °C

Symbol	Parameter	MC35002A, B MC33002A, B MC34002A, B			MC35002 MC33002 MC34002			Unit
		Min.	Typ.	Max.	Min.	Typ.	Max.	
V _{IO}	Input Offset Voltage T _{amb} = 25 °C (R _S < 10 kΩ) MC35002B, MC33002B, MC34002B MC35002A, MC33002A, MC34002A T _{min} ≤ T _{amb} ≤ T _{max} MC35002B, MC33002B, MC34002B MC35002A, MC33002A, MC34002A		3 1	5 2		3	8 13	mV
DV _{IO}	Input Offset Voltage Drift		10			10		μV/°C
I _{IO}	Input Offset Current * T _{amb} = 25 °C T _{min} ≤ T _{amb} ≤ T _{max}		5	50 4		5	50 4	pA nA
I _{IB}	Input Bias Current * T _{amb} = 25 °C T _{min} ≤ T _{amb} ≤ T _{max}		20	200 20		20	200 20	pA nA
A _{VD}	Large Signal Voltage Gain (R _L ≥ 2 kΩ, V _O = ± 10 V) T _{amb} = 25 °C T _{min} ≤ T _{amb} ≤ T _{max}	50 25	200		50 25	200		V/mV
SVR	Supply Voltage Rejection Ratio (R _S < 10 kΩ) T _{amb} = 25 °C T _{min} ≤ T _{amb} ≤ T _{max}	80 80	86		80 80	86		dB
I _{CC}	Supply Current, per Amp, no Load T _{amb} = 25 °C T _{min} ≤ T _{amb} ≤ T _{max}		1.4	2.5 2.5		1.4	2.5 2.5	mA
V _I	Input Voltage Range T _{amb} = 25 °C T _{min} ≤ T _{amb} ≤ T _{max}	- 11		+ 11	- 11		+ 11	V
CMR	Common Mode Rejection Ratio (R _S ≤ 10 kΩ) T _{amb} = 25 °C T _{min} ≤ T _{amb} ≤ T _{max}	80 80	86		70 70	86		dB
I _{OS}	Output Short-circuit Current T _{amb} = 25 °C T _{min} ≤ T _{amb} ≤ T _{max}	10 10	40	60 60	10 10	40	60 60	mA
± V _{OPP}	Output Voltage Swing T _{amb} = 25 °C T _{min} ≤ T _{amb} ≤ T _{max}	R _L ≥ 2 kΩ R _L ≥ 10 kΩ R _L ≥ 2 kΩ R _L ≥ 10 kΩ	11 12 11 12	12 13.5	11 12 11 12	12 13.5		V
S _{VO}	Slew-rate (V _I = 10 V, R _L = 2 kΩ) C _L ≤ 100 pF, T _{amb} = 25 °C, unity gain	12	16		12	16		V/μs


* The input bias currents are junction leakage currents wich approximatively double for every 10 °C increase in the junction temperature.

ELECTRICAL CHARACTERISTICS (continued)


Symbol	Parameter	MC34002A, B MC33002A, B MC35002A, B			MC34002 MC33002 MC35002			Unit
		Min.	Typ.	Max.	Min.	Typ.	Max.	
t_r	Rise Time ($V_i = 20$ mV, $R_L = 2$ k Ω) $C_L = 100$ pF, $T_{amb} = 25$ °C, unity Gain		0.1			0.1		μ s
K_{OV}	Overshoot ($V_i = 20$ mV, $R_L = 2$ k Ω) $C_L \leq 100$ pF, $T_{amb} = 25$ °C, unity gain)		10			10		%
GBP	Gain Bandwidth Product ($f = 100$ kHz, $T_{amb} = 25$ °C $V_{IN} = 10$ mV, $R_L = 2$ k Ω , $C_L = 100$ pF)	3.3	4.0	5.0	3.3	4.0	5.0	MHz
R_i	Input Resistance ($T_{amb} = 25$ °C)		10^{12}			10^{12}		Ω
THD	Total Harmonic Distortion ($f = 1$ kHz, $A_v = 20$ dB, $R_L = 2$ k Ω $C_L \leq 100$ pF, $T_{amb} = 25$ °C, $V_O = 2$ V _{PP})		0.01			0.01		%
V_n	Equivalent Input Noise Voltage ($f = 1$ kHz, $R_g = 100$ Ω)		15			15		nV/ $\sqrt{\text{Hz}}$
ϕ_m	Phase Margin		45			45		Degrees
V_{O1}/V_{O2}	Channel Separation $A_{VD} = 100$, $T_{amb} = 25$ °C		120			120		dB

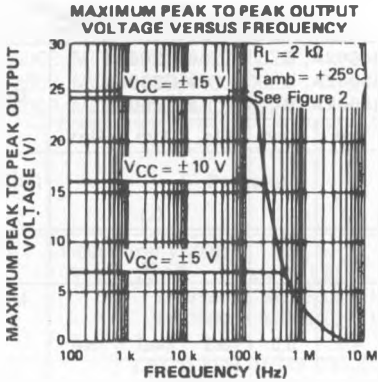


E88MC34002-02

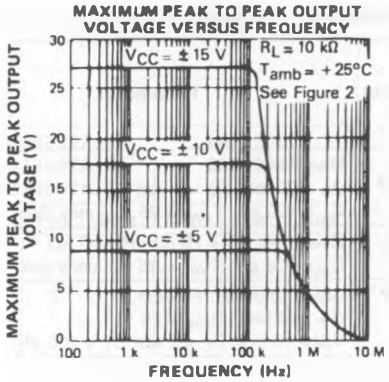


E88MC34002-03

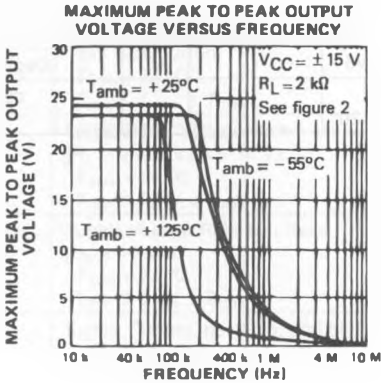


E88MC34002-04

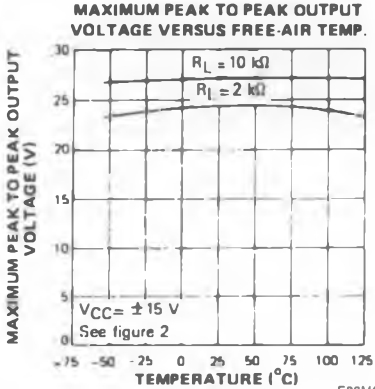


E88MC34002-05

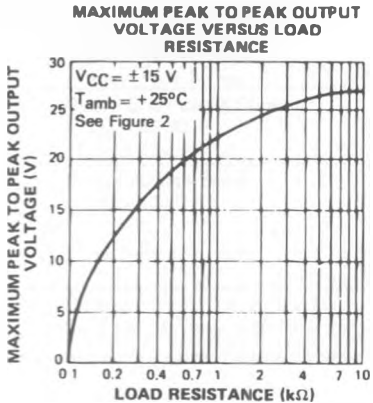


E88MC34002-06

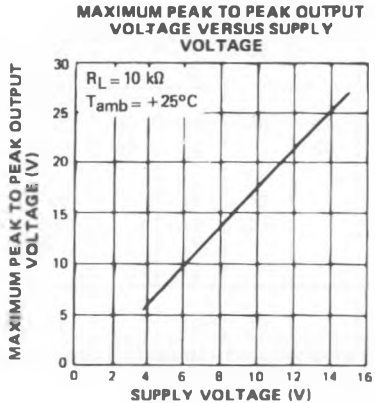


E88MC34002-07

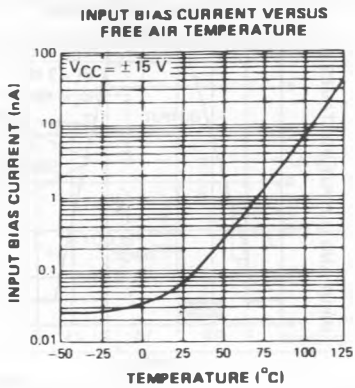


E88MC34002-08

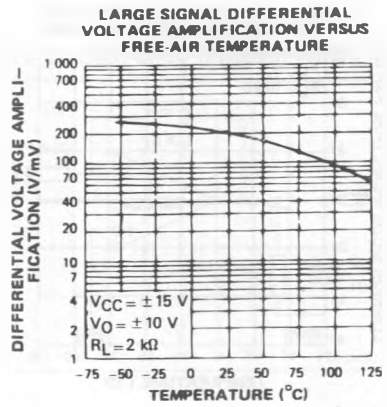


E88MC34002-09

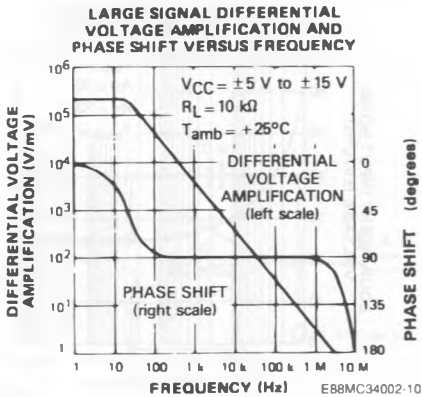


E88MC34002-10

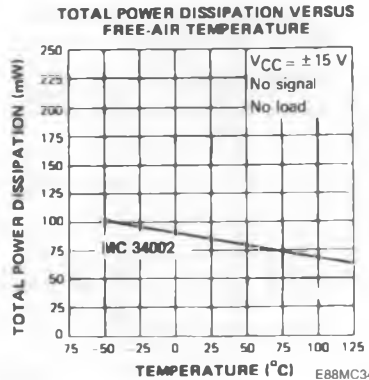

E88MC34002-11

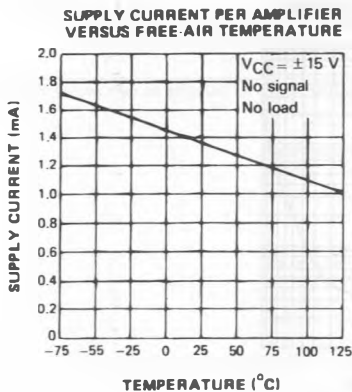


E88MC34002-12

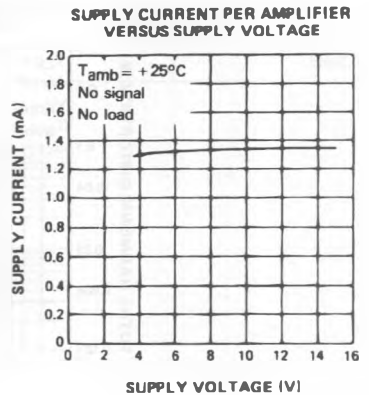


E88MC34002-13

COMMON MODE REJECTION RATIO
VERSUS FREE-AIR TEMPERATURE

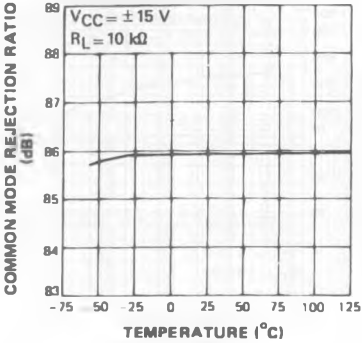


E88MC34002-14

VOLTAGE FOLLOWER LARGE
SIGNAL PULSE RESPONSE

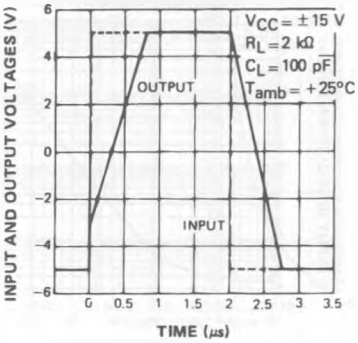


E88MC34002-15

OUTPUT VOLTAGE VERSUS TIME

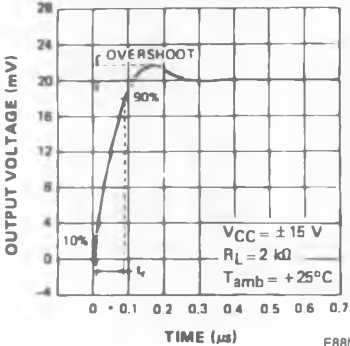


E88MC34002-16

EQUIVALENT INPUT NOISE VOL-
TAGE VERSUS FREQUENCY

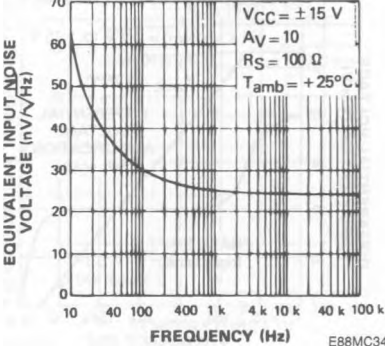

E88MC34002-17

TOTAL HARMONIC DISTORTION
VERSUS FREQUENCY

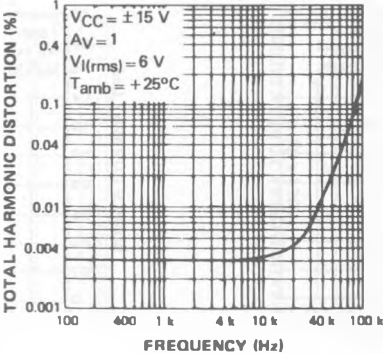

E88MC34002-18

PARAMETER MEASUREMENT INFORMATION

Figure 1 : Voltage Follower.



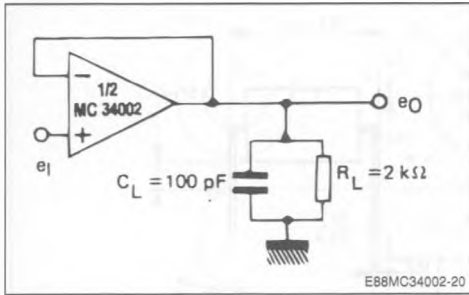


Figure 2 : Gain-of-10 Inverting Amplifier.

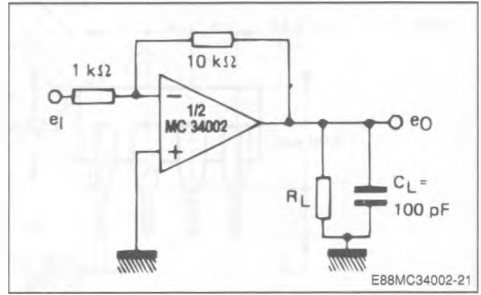

TYPICAL APPLICATION


QUADRATURE OSCILLATOR

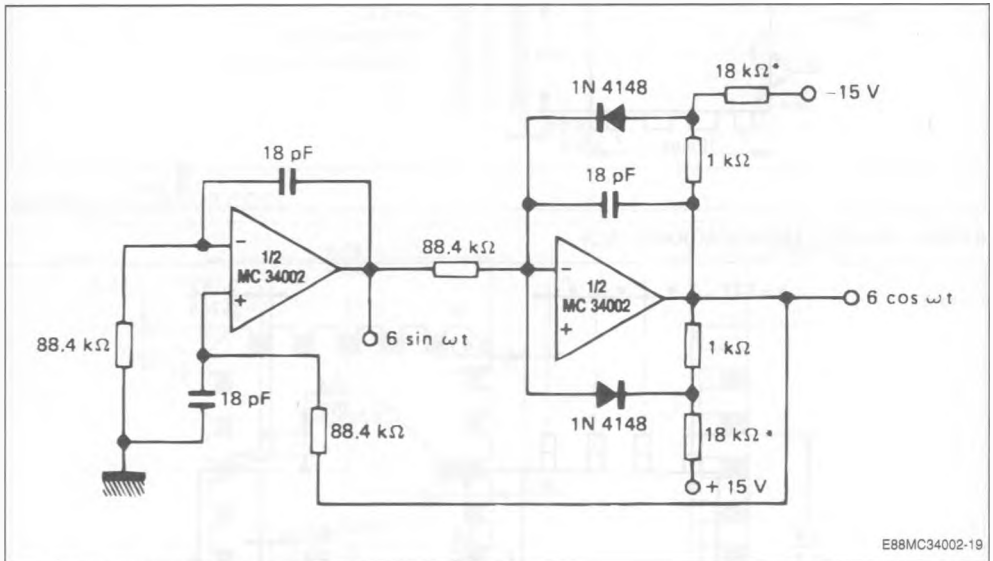


* These resistor values may be adjusted for a symmetrical output.

PACKAGE MECHANICAL DATA


8 PINS - PLASTIC DIP

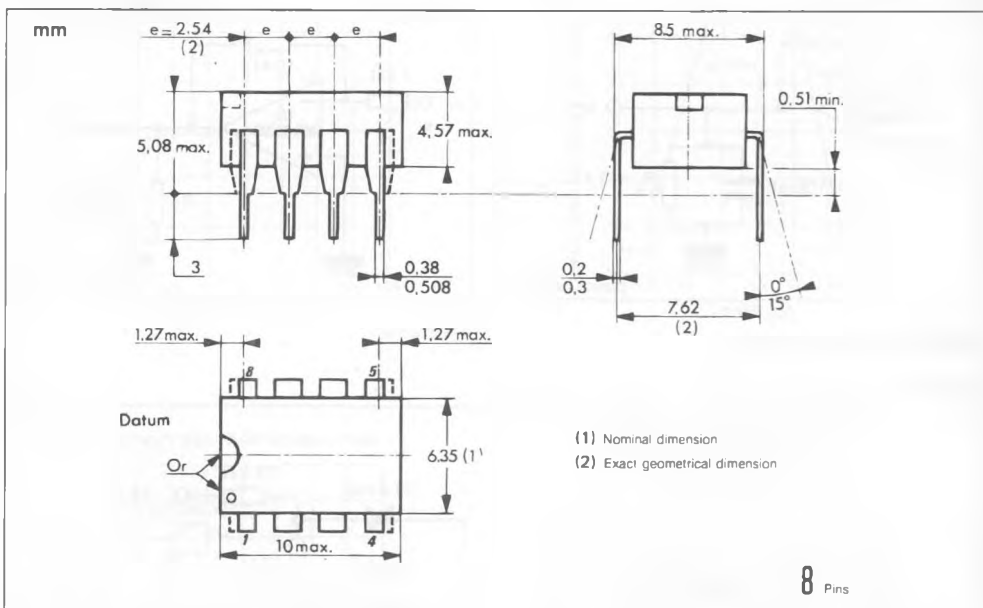

8 PINS - PLASTIC MICROPACKAGE (SO)

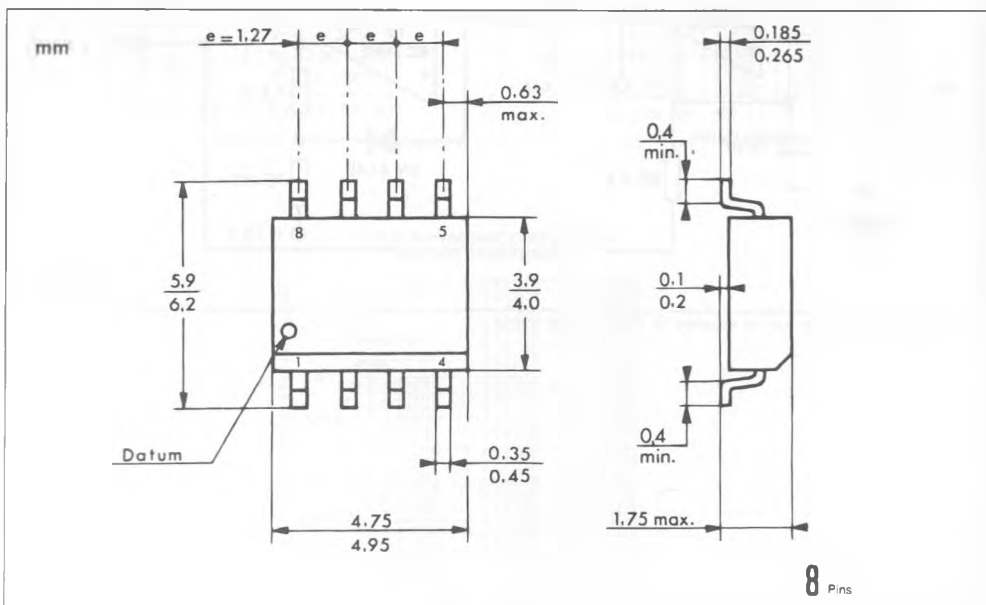

TO99 – METAL CAN

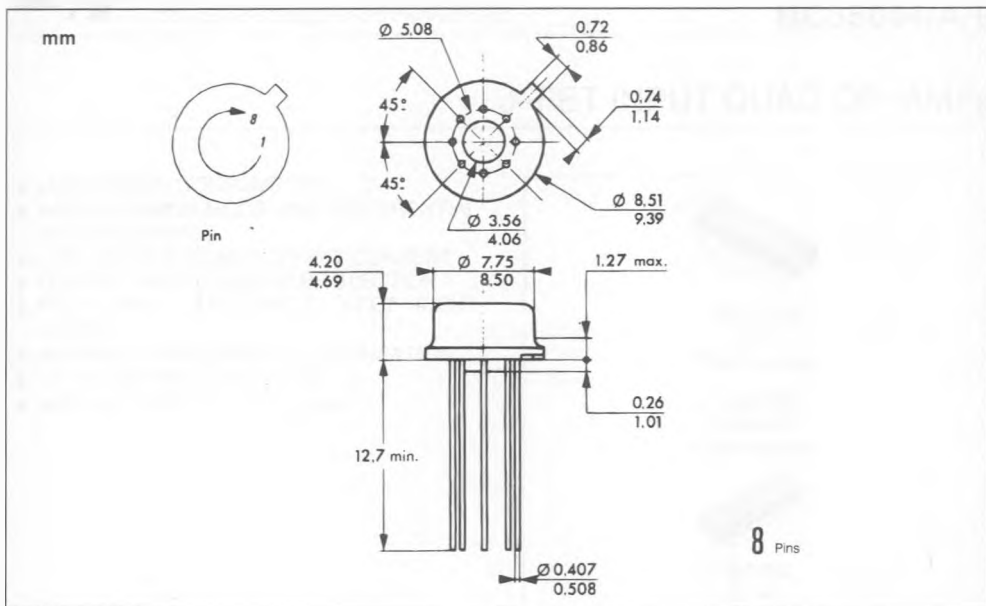

20 PINS – TRICECOP (LCC)

