


J-FET INPUT QUAD OP-AMPS

- LOW POWER CONSUMPTION
- WIDE COMMON-MODE AND DIFFERENTIAL VOLTAGE RANGE
- LOW INPUT BIAS AND OFFSET CURRENT
- OUTPUT SHORT-CIRCUIT PROTECTION
- HIGH INPUT IMPEDANCE J-FET INPUT STAGE
- INTERNAL FREQUENCY COMPENSATION
- LATCH UP FREE OPERATION
- HIGH SLEW RATE : 13 V/ μ s (typ)


DESCRIPTION

These circuits are high speed J-FET input quad operational amplifiers incorporating well matched, high voltage J-FET and bipolar transistors in a monolithic integrated circuit.


The devices feature high slew rates, low input bias and offset current, and low offset voltage temperature coefficient.



N SUFFIX
DIP14
(Plastic package)



J SUFFIX
CERDIP14
(Cerdip package)




D SUFFIX
SO14
(Plastic micropackage)



GC SUFFIX
LCC20
(Tricop LCC)

PIN CONNECTIONS (Top views)

**DIP14
CERDIP14
SO14**



- | | |
|---------------------------|----------------------------|
| 1 - Output 1 | 8 - Output 3 |
| 2 - Inverting input 1 | 9 - Inverting input 3 |
| 3 - Non-inverting input 1 | 10 - Non-inverting input 3 |
| 4 - V_{CC} | 11 - V_{CC} |
| 5 - Non-inverting input 2 | 12 - Non-inverting input 4 |
| 6 - Inverting input 2 | 13 - Inverting input 4 |
| 7 - Output 2 | 14 - Output 4 |

LCC20



- | | |
|---------------------------|----------------------------|
| 1 - NC | 11 - NC |
| 2 - Output 1 | 12 - Output 3 |
| 3 - Inverting input 1 | 13 - Inverting input 3 |
| 4 - Non-inverting input 1 | 14 - Non-inverting input 3 |
| 5 - NC | 15 - NC |
| 6 - V_{CC} | 16 - V_{CC} |
| 7 - NC | 17 - NC |
| 8 - Non-inverting input 2 | 18 - Non-inverting input 4 |
| 9 - Inverting input 2 | 19 - Inverting input 4 |
| 10 - Output 2 | 20 - Output 4 |

ORDER CODES

Part Number	Temperature	Package
MC35004GC	- 55 °C to + 125 °C	LCC
MC35004AGC	- 55 °C to + 125 °C	LCC
MC35004BGC	- 55 °C to + 125 °C	LCC
MC35004J	- 55 °C to + 125 °C	CERDIP
MC35004AJ	- 55 °C to + 125 °C	CERDIP
MC35004BJ	- 55 °C to + 125 °C	CERDIP
MC33004N	- 40 °C to + 105 °C	DIP 14
MC33004AN	- 40 °C to + 105 °C	DIP 14
MC33004BN	- 40 °C to + 105 °C	DIP 14
MC33004D	- 40 °C to + 105 °C	SO 14
MC33004AD	- 40 °C to + 105 °C	SO 14
MC33004BD	- 40 °C to + 105 °C	SO 14
MC34004N	0 °C to + 70 °C	DIP 14
MC34004AN	0 °C to + 70 °C	DIP 14
MC34004BN	0 °C to + 70 °C	DIP 14
MC34004D	0 °C to + 70 °C	SO 14
MC34004AD	0 °C to + 70 °C	SO 14
MC34004BD	0 °C to + 70 °C	SO 14


ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_{CC}	Supply Voltage (note 1)	± 18	V
V_I	Input Voltage (note 3)	± 15	V
V_{CC}	Diff. Input Voltage (note 2)	± 30	V
P_{Tot}	Power Dissipation	680	mW
	Output Short-circuit Duration (note 4)	Infinite	
T_{oper}	Operating Free Air Temperature Range	MC34004, A, B 0 to 70 MC33004, A, B - 40 to 105 MC35004, A, B - 55 to 125	°C
T_{sig}	Storage Temperature Range	- 65 to 150	°C

Notes : 1. All voltage values, except differential voltage, are with respect to the zero reference level (ground) of the supply voltages where the zero reference level is the midpoint between V_{CC} and V_{CC} .

- Differential voltages are at the non-inverting input terminal with respect to the inverting input terminal
- The magnitude of the input voltage must never exceed the magnitude of the supply voltage or 15 volts, whichever is less
- The output may be shorted to ground or to either supply. Temperature and /or supply voltages must be limited to ensure that the dissipation rating is not exceeded.

SCHEMATIC (each amplifier)

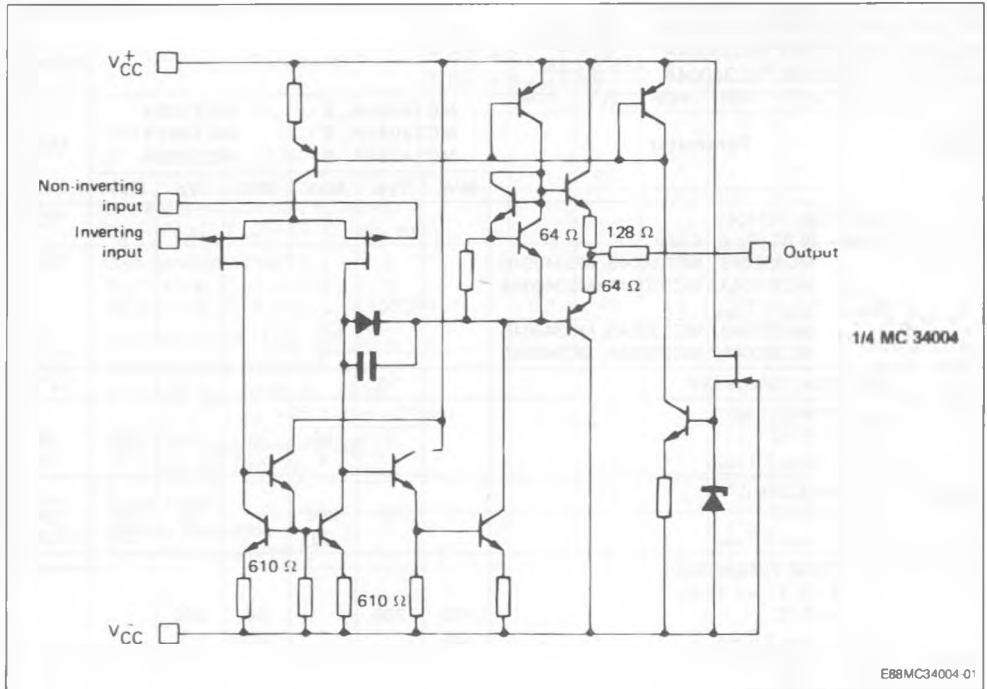

Case	Outputs	Inverting Inputs	Non-inverting Inputs	V_{CC}^+	V_{CC}^-	N.C.
DIP14 CERDIP14 SO14	1, 7, 14, 8	2, 6, 13, 9	3, 5, 12, 10	4	11	
LCC20	2, 10, 12, 20	3, 9, 13, 19		4, 8, 14, 18	6	16

* LCC20 : Other pins are not connected.

ELECTRICAL CHARACTERISTICS


 $V_{CC} = \pm 15$ V (unless otherwise specified)MC35004, MC35004B, MC35004A $-55 \leq T_{amb} \leq +125$ °CMC33004, MC33004B, MC33004A $-40 \leq T_{amb} \leq +105$ °CMC34004, MC34004B, MC34004A $0 \leq T_{amb} \leq +70$ °C

Symbol	Parameter	MC35004A, B MC33004A, B MC34004A, B			MC35004 MC33004 MC34004			Unit
		Min.	Typ.	Max.	Min.	Typ.	Max.	
V_{IO}	Input Offset Voltage $T_{amb} = 25$ °C ($R_s \leq 10$ k Ω) MC35004B, MC33004B, MC34004B MC35004A, MC33004A, MC34004A $T_{min} \leq T_{amb} \leq T_{max}$ MC35004B, MC33004B, MC34004B MC35004A, MC33004A, MC34004A		3 1	5 2		3 8	13	mV
DV_{IO}	Input Offset Voltage Drift		10			10		μ V/°C
I_{IO}	Input Offset Current * $T_{amb} = 25$ °C $T_{min} \leq T_{amb} \leq T_{max}$		5	50 4		5 50 4		pA nA
I_{IB}	Input Bias Current * $T_{amb} = 25$ °C $T_{min} \leq T_{amb} \leq T_{max}$		30	200 20		30 200 20		pA nA
A_{VD}	Large Signal Voltage Gain ($R_L > 2$ k Ω , $V_o = \pm 10$ V) $T_{amb} = 25$ °C $T_{min} \leq T_{amb} \leq T_{max}$	50 25	200		50 25	200		V/mV
SVR	Supply Voltage Rejection Ratio ($R_s < 10$ k Ω) $T_{amb} = 25$ °C $T_{min} \leq T_{amb} \leq T_{max}$	80 80	86		80 80	86		dB
I_{CC}	Supply Current, per Amp, no Load $T_{amb} = 25$ °C $T_{min} \leq T_{amb} \leq T_{max}$		1.4	2.5 2.5		1.4 2.5 2.5		mA
V_i	Input Voltage Range $T_{amb} = 25$ °C $T_{min} \leq T_{amb} \leq T_{max}$	- 11		+ 11	- 11		+ 11	V
CMR	Common Mode Rejection Ratio ($R_s < 10$ k Ω) $T_{amb} = 25$ °C $T_{min} \leq T_{amb} \leq T_{max}$	80 80	86		70 70	86		dB
I_{OS}	Output Short-circuit Current $T_{amb} = 25$ °C $T_{min} \leq T_{amb} \leq T_{max}$	10 10	40	60 60	10 10	40 60 60		mA
$\pm V_{OPP}$	Output Voltage Swing $T_{amb} = 25$ °C $T_{min} \leq T_{amb} \leq T_{max}$ $R_L \geq 2$ k Ω $R_L \geq 10$ k Ω $R_L \geq 2$ k Ω $R_L \geq 10$ k Ω	11 12 11 12	12 13.5		11 12 11 12	12 13.5		V
S_{VO}	Slew-rate ($V_i = 10$ V, $R_L = 2$ k Ω) $C_L \leq 100$ pF, $T_{amb} = 25$ °C, unity gain	12	16		12	16		V/ μ s


* The input bias currents are junction leakage currents which are approximately double for every 10 °C increase in the junction temperature.

ELECTRICAL CHARACTERISTICS (continued)


Symbol	Parameter	MC34004A, B MC33004A, B MC35004A, B			MC34004 MC33004 MC35004			Unit
		Min.	Typ.	Max.	Min.	Typ.	Max.	
t_r	Rise Time ($V_I = 20$ mV, $R_L = 2$ k Ω) $C_L = 100$ pF, $T_{amb} = 25$ °C, unity Gain		0.1			0.1		μ s
K_{OV}	Overshoot ($V_I = 20$ mV, $R_L = 2$ k Ω) $C_L \leq 100$ pF, $T_{amb} = 25$ °C, unity gain)		10			10		%
GBP	Gain Bandwidth Product ($f = 100$ kHz, $T_{amb} = 25$ °C $V_{IN} = 10$ mV, $R_L = 2$ k Ω , $C_L = 100$ pF)	3.3	4.0	5.0	3.3	4.0	5.0	MHz
R_I	Input Resistance ($T_{amb} = 25$ °C)		10^{12}			10^{12}		Ω
THD	Total Harmonic Distortion ($f = 1$ kHz, $A_V = 20$ dB, $R_L = 2$ k Ω) $C_L \leq 100$ pF, $T_{amb} = 25$ °C, $V_O = 2$ V _{PP})		0.01			0.01		%
V_n	Equivalent Input Noise Voltage ($f = 1$ kHz, $R_g = 100$ Ω)		15			15		nV/ $\sqrt{Hz}$
ϕ_m	Phase Margin		45			45		Degrees
V_{O1}/V_{O2}	Channel Separation $A_{VD} = 100$, $T_{amb} = 25$ °C		120					120

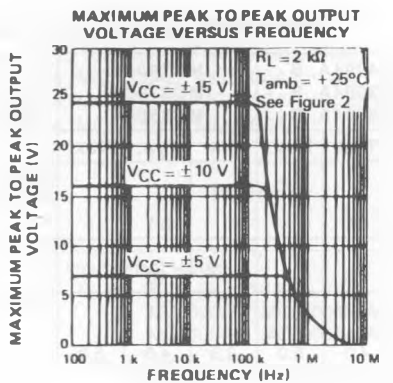


E88MC34004-02

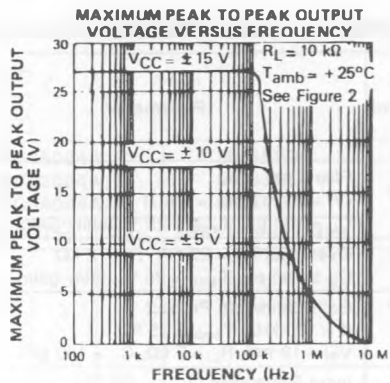


E88MC34004-03

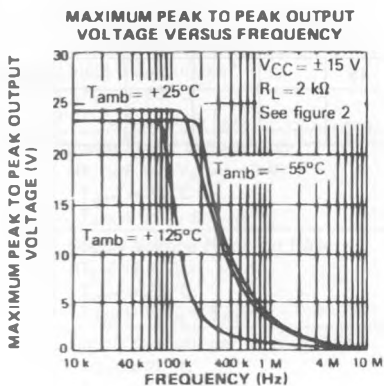


E88MC34004-04

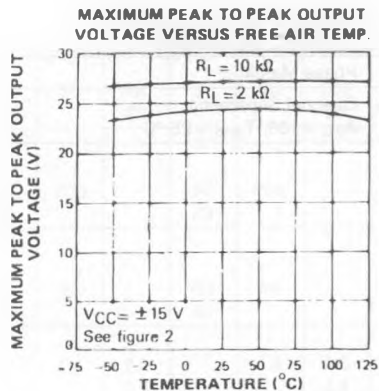

E88MC34004-05

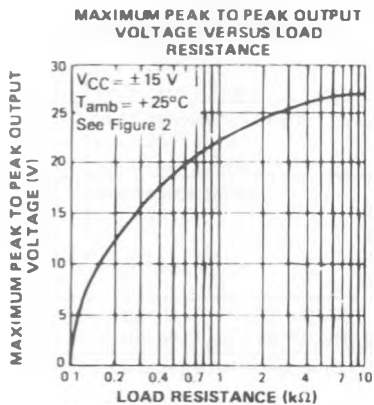


E88MC34004-06

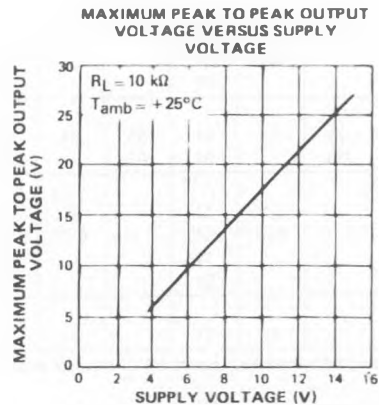


E88MC34004-07


INPUT BIAS CURRENT VERSUS
FREE AIR TEMPERATURE

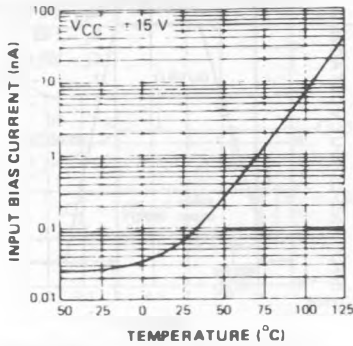


LARGE SIGNAL DIFFERENTIAL
VOLTAGE AMPLIFICATION VERSUS
FREE AIR TEMPERATURE

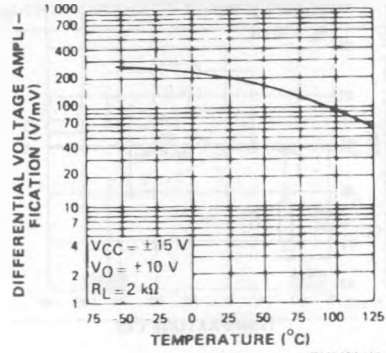


LARGE SIGNAL DIFFERENTIAL
VOLTAGE AMPLIFICATION AND
PHASE SHIFT VERSUS FREQUENCY

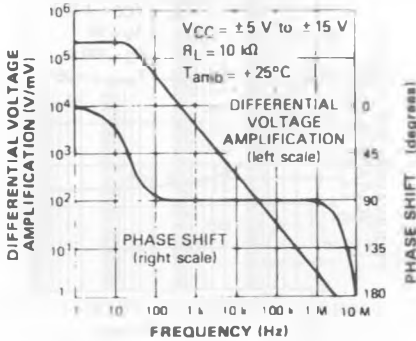


TOTAL POWER DISSIPATION VERSUS
FREE AIR TEMPERATURE

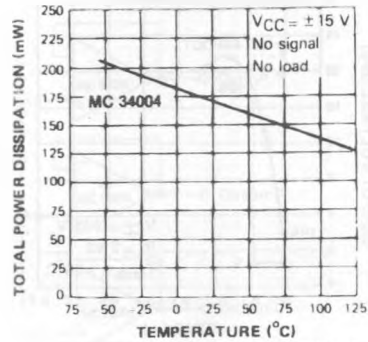


SUPPLY CURRENT PER AMPLIFIER
VERSUS FREE AIR TEMPERATURE

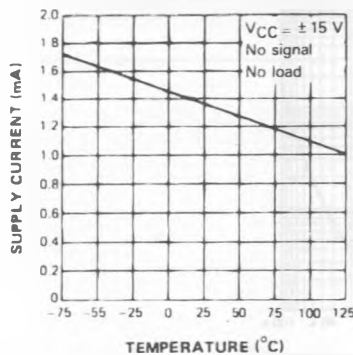

SUPPLY CURRENT PER AMPLIFIER
VERSUS SUPPLY VOLTAGE

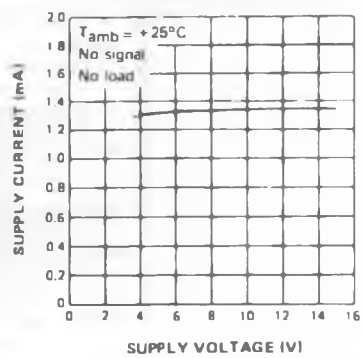


COMMON MODE REJECTION RATIO
VERSUS FREE-AIR TEMPERATURE

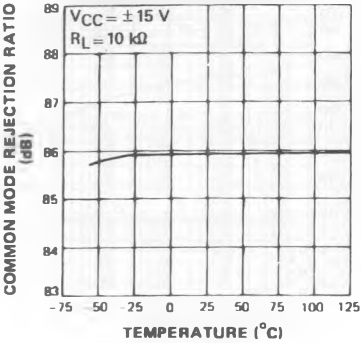


E88MC34004-14

VOLTAGE FOLLOWER LARGE
SIGNAL PULSE RESPONSE

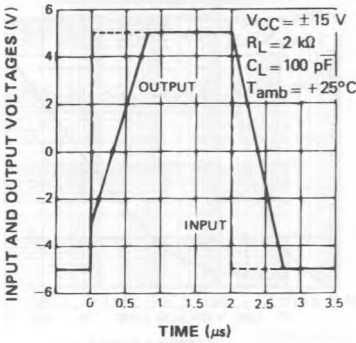


E88MC34004-15

OUTPUT VOLTAGE VERSUS TIME




E88MC34004-16

EQUIVALENT INPUT NOISE VOL-
TAGE VERSUS FREQUENCY

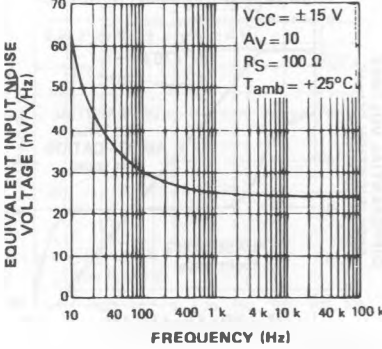

E88MC34004-17

TOTAL HARMONIC DISTORTION
VERSUS FREQUENCY

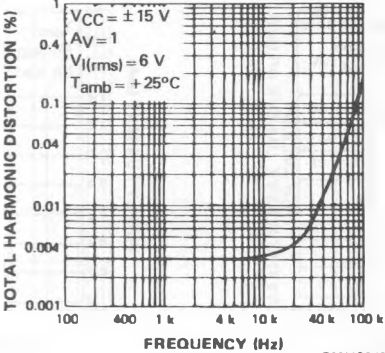

E88MC34004-18

PARAMETER MEASUREMENT INFORMATION

Figure 1 : Voltage Follower.



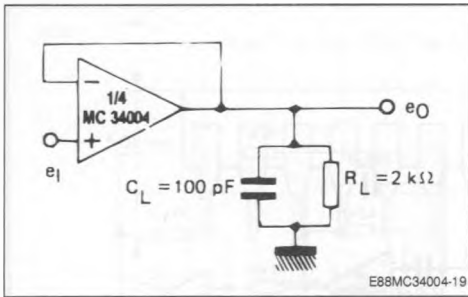


Figure 2 : Gain-of-10 Inverting Amplifier.

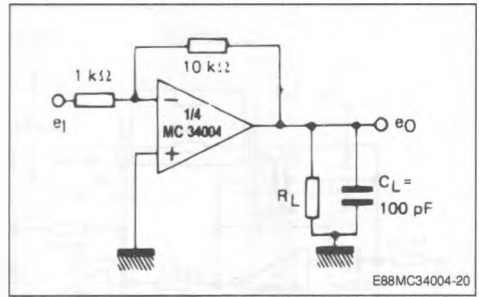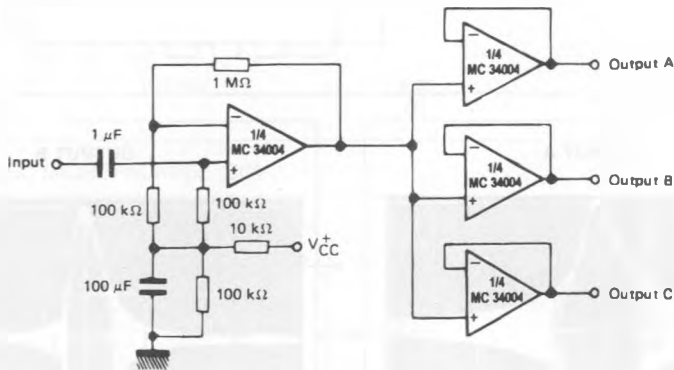


AUDIO DISTRIBUTION AMPLIFIER

 $f_0 = 100\text{ kHz}$ 

PACKAGE MECHANICAL DATA

14 PINS – PLASTIC DIP OR CerdIP

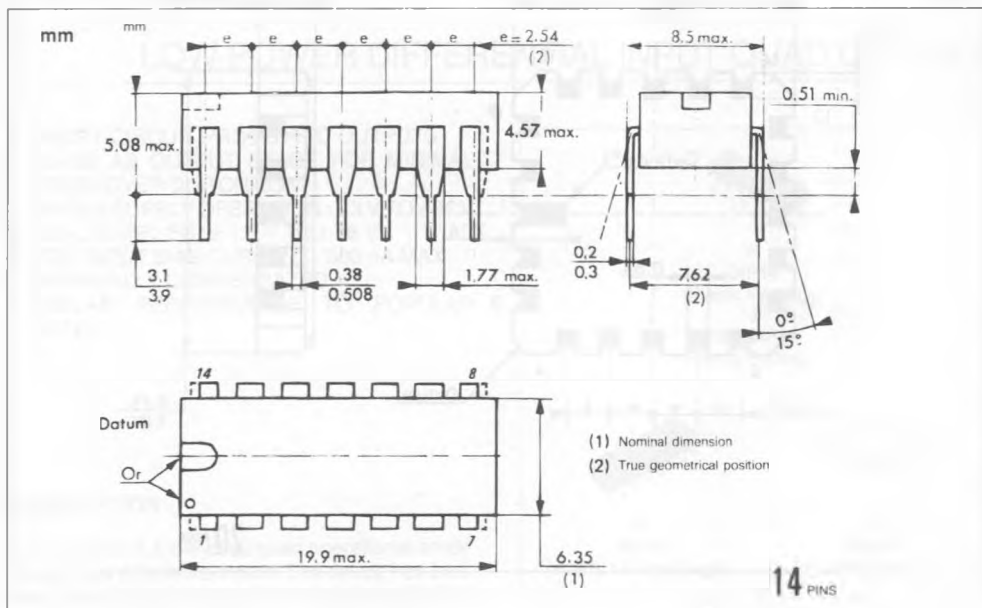

14 PINS – PLASTIC MICROPACKAGE (SO)

