

# RC4136, RM4136, RV4136 QUAD GENERAL-PURPOSE OPERATIONAL AMPLIFIERS

The RM4136 and RV4136 are obsolete and are no longer supplied.

SLOS072A – MARCH 1978 – REVISED JANUARY 2002

- Continuous Short-Circuit Protection
- Wide Common-Mode and Differential Voltage Ranges
- No Frequency Compensation Required
- Low Power Consumption
- No Latch-Up
- Unity-Gain Bandwidth . . . 3 MHz Typ
- Gain and Phase Match Between Amplifiers
- Designed To Be Interchangeable With Raytheon RC4136, RM4136, and RV4136
- Low Noise . . .  $8 \text{ nV}\sqrt{\text{Hz}}$  Typ at 1 kHz


## description

The RC4136, RM4136, and RV4136 are quad general-purpose operational amplifiers, with each amplifier electrically similar to the  $\mu\text{A}741$ , except that offset null capability is not provided.


The high common-mode input voltage range and the absence of latch-up make these amplifiers ideal for voltage-follower applications. The devices are short-circuit protected and the internal frequency compensation ensures stability without external components.

The RC4136 is characterized for operation from  $0^\circ\text{C}$  to  $70^\circ\text{C}$ , the RM4136 is characterized for operation over the full military temperature range of  $-55^\circ\text{C}$  to  $125^\circ\text{C}$ , and the RV4136 is characterized for operation from  $-40^\circ\text{C}$  to  $85^\circ\text{C}$ .

RM4136 . . . J OR W PACKAGE  
ALL OTHERS . . . D OR N PACKAGE  
(TOP VIEW)

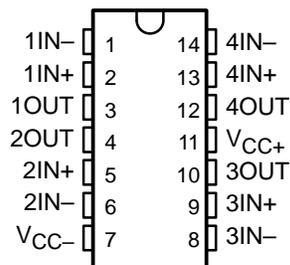


RM4136 . . . FK PACKAGE  
(TOP VIEW)

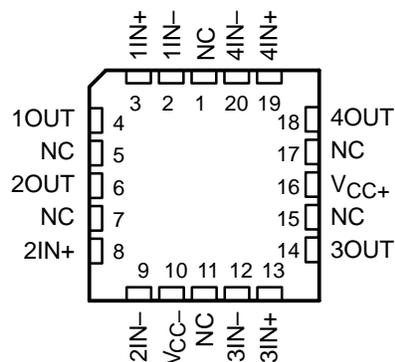

NC – No internal connection

## symbol (each amplifier)

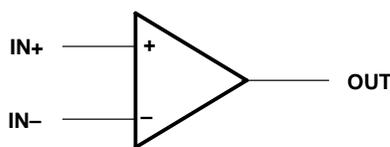

## AVAILABLE OPTIONS

| T <sub>A</sub> | V <sub>IO</sub> MAX<br>AT 25°C | PACKAGE              |                      |                    |                    |             |
|----------------|--------------------------------|----------------------|----------------------|--------------------|--------------------|-------------|
|                |                                | SMALL OUTLINE<br>(D) | CHIP CARRIER<br>(FK) | CERAMIC DIP<br>(J) | PLASTIC DIP<br>(N) | FLAT<br>(W) |
| 0°C to 70°C    | 6 mV                           | RC4136D              | —                    | —                  | RC4136N            | —           |
| -40°C to 85°C  | 6 mV                           | RV4136D              | —                    | —                  | RV4136N            | —           |
| -55°C to 125°C | 4 mV                           | —                    | RM4136FK             | RM4136J            | —                  | RM4136W     |

The D packages are available taped and reeled. Add the suffix R to the device type (e.g., RC4136DR).



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

 **TEXAS  
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265


Copyright © 2002, Texas Instruments Incorporated  
On products compliant to MIL-PRF-38535, all parameters are tested unless otherwise noted. On all other products, production processing does not necessarily include testing of all parameters.

# RC4136, RM4136, RV4136 QUAD GENERAL-PURPOSE OPERATIONAL AMPLIFIERS

The RM4136 and RV4136 are  
obsolete and are no longer supplied.

SLOS072A – MARCH 1978 – REVISED JANUARY 2002

## schematic (each amplifier)

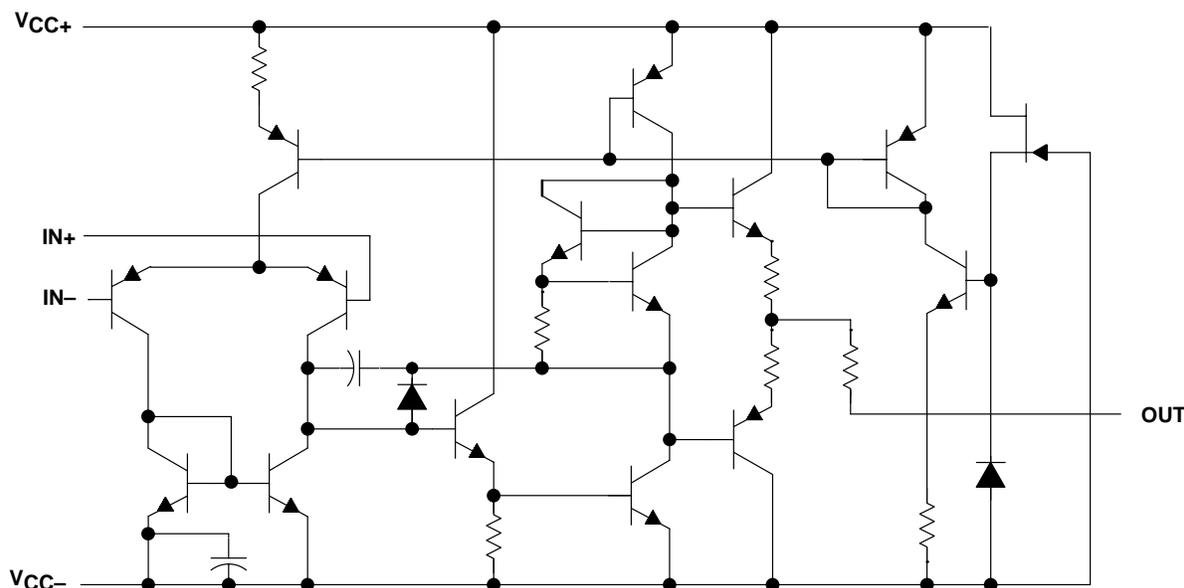

## absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

|  |                              |
|--|------------------------------|
| Supply voltage (see Note 1): $V_{CC+}$ , RC4136 and RV4136                       | 18 V                         |
| $V_{CC+}$ , RM4136   | 22 V                         |
| $V_{CC-}$ , RC4136 and RV4136  | -18 V                        |
| $V_{CC-}$ , RM4136   | -22 V                        |
| Differential input voltage, $V_{ID}$ (see Note 2)                                | $\pm 30$ V                   |
| Input voltage, $V_I$ (any input) (see Notes 1 and 3)                             | $\pm 15$ V                   |
| Duration of output short circuit to ground, one amplifier at a time (see Note 4) | Unlimited                    |
| Continuous total dissipation   | See Dissipation Rating Table |
| Package thermal impedance, $\theta_{JA}$ (see Note 5): D package                 | 86°C/W                       |
| N package  | 80°C/W                       |
| Case temperature for 60 seconds: FK package                                      | 260°C                        |
| Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds: D or N package     | 260°C                        |
| Lead temperature 1,6 mm (1/16 inch) from case for 60 seconds: J or W package     | 300°C                        |
| Storage temperature range, $T_{stg}$   | -65°C to 150°C               |

† Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES:
1. All voltage values, unless otherwise noted, are with respect to the midpoint between  $V_{CC+}$  and  $V_{CC-}$ .
  2. Differential voltages are at IN+ with respect to IN-.
  3. The magnitude of the input voltage must never exceed the magnitude of the supply voltage or 15 V, whichever is less.
  4. Temperature and/or supply voltages must be limited to ensure that the dissipation rating is not exceeded.
  5. The package thermal impedance is calculated in accordance with JESD 51-7.

DISSIPATION RATING TABLE

| PACKAGE | $T_A \leq 25^\circ\text{C}$<br>POWER RATING | DERATING<br>FACTOR | DERATE<br>ABOVE $T_A$ | $T_A = 70^\circ\text{C}$<br>POWER RATING | $T_A = 85^\circ\text{C}$<br>POWER RATING | $T_A = 125^\circ\text{C}$<br>POWER RATING |
|---------|---|--------------------|-----------------------|--|--|---|
| FK      | 800 mW                                      | 11.0 mW/°C         | 77°C                  | 800 mW                                   | 715 mW                                   | 275 mW                                    |
| J       | 800 mW                                      | 11.0 mW/°C         | 77°C                  | 800 mW                                   | 715 mW                                   | 275 mW                                    |
| W       | 800 mW                                      | 8.0 mW/°C          | 50°C                  | 640 mW                                   | 520 mW                                   | 200 mW                                    |



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

# RC4136, RM4136, RV4136 QUAD GENERAL-PURPOSE OPERATIONAL AMPLIFIERS

The RM4136 and RV4136 are  
obsolete and are no longer supplied.

SLOS072A – MARCH 1978 – REVISED JANUARY 2002

## recommended operating conditions

|           |                | MIN | MAX | UNIT |
|-----------|----------------|-----|-----|------|
| $V_{CC+}$ | Supply voltage | 5   | 15  | V    |
| $V_{CC-}$ | Supply voltage | -5  | -15 | V    |

## electrical characteristics at specified free-air temperature, $V_{CC+} = 15\text{ V}$ , $V_{CC-} = -15\text{ V}$

| PARAMETER  | TEST CONDITIONS†  | RC4136     |      |      | RM4136 |      |      | RV4136 |                       |     | UNIT |
|--|---|------------|------|------|--------|------|------|--------|-----------------------|-----|------|
|  |   | MIN        | TYP  | MAX  | MIN    | TYP  | MAX  | MIN    | TYP                   | MAX |      |
| $V_{IL}$ Input offset voltage  | $V_O = 0$   | 25°C       | 0.5  | 6    | 0.5    | 4    | 0.5  | 6      | mV                    |     |      |
|  |   | Full range | 7.5  |      | 6      |      | 7.5  |        |                       |     |      |
| $I_{IO}$ Input offset current  | $V_O = 0$   | 25°C       | 5    | 200  | 5      | 150  | 5    | 200    | nA                    |     |      |
|  |   | Full range | 300  |      | 500    |      | 500  |        |                       |     |      |
| $I_{IB}$ Input bias current  | $V_O = 0$   | 25°C       | 140  | 500  | 140    | 400  | 140  | 500    | nA                    |     |      |
|  |   | Full range | 800  |      | 1500   |      | 1500 |        |                       |     |      |
| $V_i$ Input voltage range  |   | 25°C       | ±12  | ±14  | ±12    | ±14  | ±12  | ±14    | V                     |     |      |
| $V_{OM}$ Maximum peak output voltage swing                             | $R_L = 10\text{ k}\Omega$   | 25°C       | ±12  | ±14  | ±12    | ±14  | ±12  | ±14    | V                     |     |      |
|  | $R_L = 2\text{ k}\Omega$  | 25°C       | ±10  | ±13  | ±10    | ±13  | ±10  | ±13    |                       |     |      |
|  | $R_L \geq 2\text{ k}\Omega$   | Full range | ±10  |      | ±10    |      | ±10  |        |                       |     |      |
| $A_{VD}$ Large-signal differential voltage amplification               | $V_O = \pm 10\text{ V}$ ,<br>$R_L \geq 2\text{ k}\Omega$            | 25°C       | 20   | 300  | 50     | 350  | 20   | 300    | V/mV                  |     |      |
|  |   | Full range | 15   |      | 25     |      | 15   |        |                       |     |      |
| $B_1$ Unity-gain bandwidth   |   | 25°C       | 3    |      | 3.5    |      | 3    |        | MHz                   |     |      |
| $r_i$ Input resistance   |   | 25°C       | 0.3* | 5    | 0.3*   | 5    | 0.3* | 5      | MΩ                    |     |      |
| CMRR Common-mode rejection ratio                                       | $V_O = 0$ , $R_S = 50\ \Omega$                                      | 25°C       | 70   | 90   | 70     | 90   | 70   | 90     | dB                    |     |      |
| $k_{SVS}$ Supply-voltage sensitivity ( $\Delta V_{IO}/\Delta V_{CC}$ ) | $V_{CC} = \pm 9\text{ V to } \pm 15\text{ V}$ ,<br>$V_O = 0$        | 25°C       | 30   | 150  | 30     | 150  | 30   | 150    | μV/V                  |     |      |
| $V_n$ Equivalent input noise voltage (closed loop)                     | $A_{VD} = 100$ ,<br>BW = 1 Hz,<br>f = 1 kHz,<br>$R_S = 100\ \Omega$ | 25°C       | 8    |      | 8      |      | 8    |        | nV $\sqrt{\text{Hz}}$ |     |      |
| $I_{CC}$ Supply current (all four amplifiers)                          | $V_O = 0$ , No load   | 25°C       | 5    | 11.3 | 5      | 11.3 | 5    | 11.3   | mA                    |     |      |
|  |   | MIN $T_A$  | 6    | 13.7 | 6      | 13.3 | 6    | 13.7   |                       |     |      |
|  |   | MAX $T_A$  | 4.5  | 10   | 4.5    | 10   | 4.5  | 10     |                       |     |      |
| $P_D$ Total power dissipation (all four amplifiers)                    | $V_O = 0$ , No load   | 25°C       | 150  | 340  | 150    | 340  | 150  | 340    | mW                    |     |      |
|  |   | MIN $T_A$  | 180  | 400  | 180    | 400  | 180  | 400    |                       |     |      |
|  |   | MAX $T_A$  | 135  | 300  | 135    | 300  | 135  | 300    |                       |     |      |
| Crosstalk attenuation ( $V_{O1}/V_{O2}$ )                              | $A_{VD} = 100$ ,<br>f = 10 kHz,<br>$R_S = 1\text{ k}\Omega$         | 25°C       | 105  |      | 105    |      | 105  |        | dB                    |     |      |

\* This parameter is not production tested.

† All characteristics are measured under open-loop conditions with zero common-mode input voltage, unless otherwise specified. Full range is 0°C to 70°C for RC4136, -55°C to 125°C for RM4136, and -40°C to 85°C for RV4136. Minimum  $T_A$  is 0°C for RC4136, -55°C for RM4136, and -40°C for RV4136. Maximum  $T_A$  is 70°C for RC4136, 125°C for RM4136, and 85°C for RV4136.



# RC4136, RM4136, RV4136 QUAD GENERAL-PURPOSE OPERATIONAL AMPLIFIERS

The RM4136 and RV4136 are  
obsolete and are no longer supplied.

SLOS072A – MARCH 1978 – REVISED JANUARY 2002

operating characteristics,  $V_{CC+} = 15\text{ V}$ ,  $V_{CC-} = -15\text{ V}$ ,  $T_A = 25^\circ\text{C}$

| PARAMETER |                         | TEST CONDITIONS   | TYP  | UNIT                   |
|-----------|-------------------------|---|------|------------------------|
| $t_r$     | Rise time               | $V_I = 20\text{ mV}$ , $C_L = 100\text{ pF}$ , $R_L = 2\text{ k}\Omega$ | 0.13 | $\mu\text{s}$          |
|           | Overshoot factor        | $V_I = 20\text{ mV}$ , $C_L = 100\text{ pF}$ , $R_L = 2\text{ k}\Omega$ | 5    | %                      |
| SR        | Slew rate at unity gain | $V_I = 10\text{ V}$ , $C_L = 100\text{ pF}$ , $R_L = 2\text{ k}\Omega$  | 1.7  | $\text{V}/\mu\text{s}$ |



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

### Mailing Address:

Texas Instruments  
Post Office Box 655303  
Dallas, Texas 75265