



51K 400

Integrato finale 2×25 W


$V_{CC\ max}$	± 38	V	unit
T_C	105	°C	
T_{stg}	$-30 \sim +105$	°C	
t_B	$V_{CC} = \pm 26V, P_O = 25W$ $R_L = 8\Omega, f = 50Hz$	2	sec
V_{CC}	± 26	V	unit
R_L	8	Ω	

$T_a = 25^\circ C, V_{CC} = \pm 26V, R_L = 8\Omega, R_g = 600\Omega, V_G = 40dB,$



		min	typ	max	unit
I_{CC0}	$V_{CC} = \pm 30V$	20	40	120	mA
$P_O(1)$	$f = 20 \sim 20kHz, THD = 0.08\%$	25			W
$P_O(2)$	$V_{CC} = \pm 23V, f = 1kHz, THD = 0.2\%$ $R_L = 4\Omega$	30			W
THD	$f = 20 \sim 20kHz, P_O = 1W$			0.08	%
f_L, f_H	$P_O = 1W, +0_{-3}dB, f = 1kHz$		10~100k		Hz
r_i	$P_O = 1W, f = 1kHz$		32k		Ω
V_{NO}	$V_{CC} = \pm 30V, R_g = 10k\Omega$ シヤント			1.2	mVrms
V_N	$V_{CC} = \pm 30V$	-70	0	+70	mV

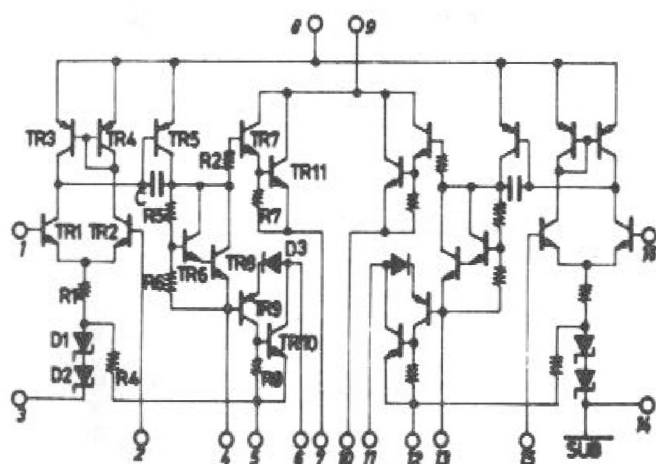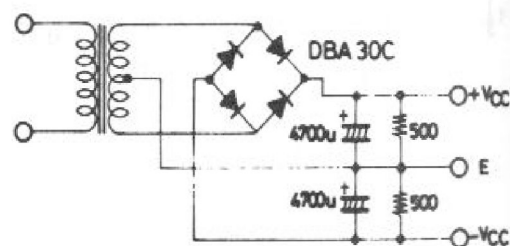

外形図 4016
(unit: mm)

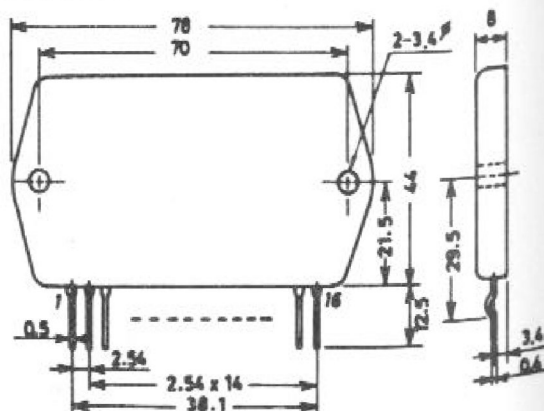

出力電力, P_O — W

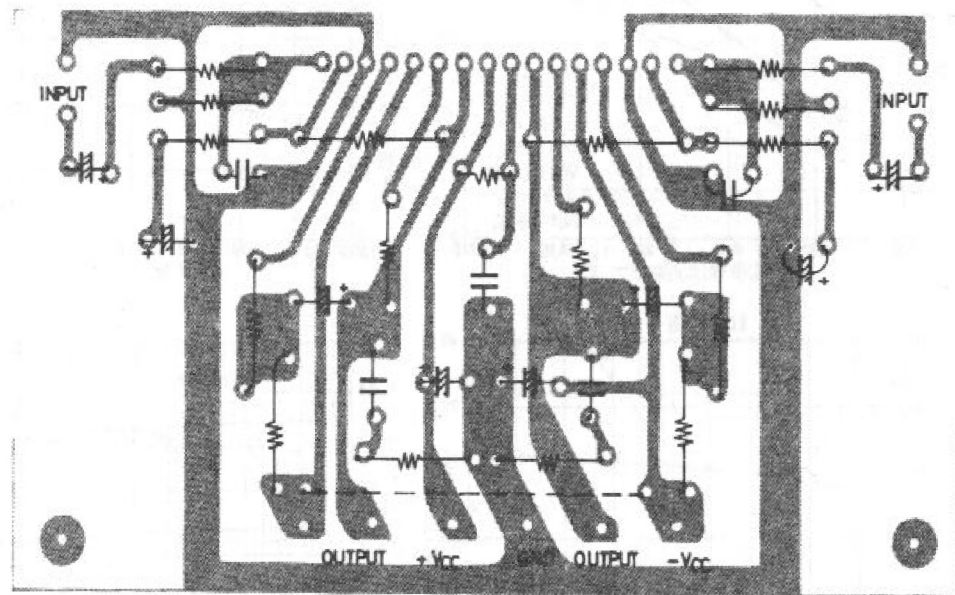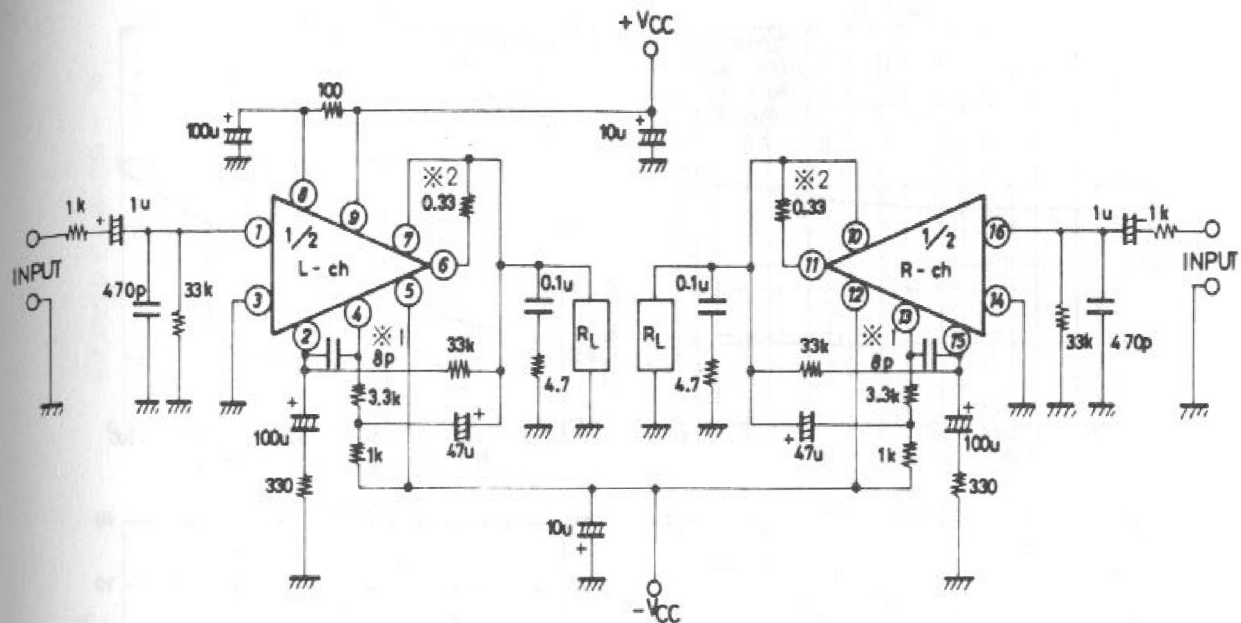

100×55 mm²)

注 ※1 VG=38dB
※2 0.1~0.22 Ω

$R_L=8\Omega$ 時で 0.03%

$R_L=4\Omega$

