

TOSHIBA CMOS DIGITAL INTEGRATED CIRCUIT SILICON MONOLITHIC


TC9271F, TC9271N, TC9271FS

MODULATION / TRANSMISSION IC FOR DIGITAL AUDIO INTERFACE

TC9271F/N/FS are modulation/transmission ICs for digital audio interface based on EIAJ CP-1201 standards.

FEATURES


- Based on EIAJ CP-1201 standards.
- Data input format selectable between MSB first or LSB first. Data length is 24 bit max.
- Two modes : 2 channel and 4 channel
- Channel status data easily set with external pins. The data can be input serially by microcontroller.
- User data can be transmitted.
- Double-speed operation
- Selectable LRCK polarity
- Three packages : 28-pin and 30-pin flat package, 28-pin shrink DIP package

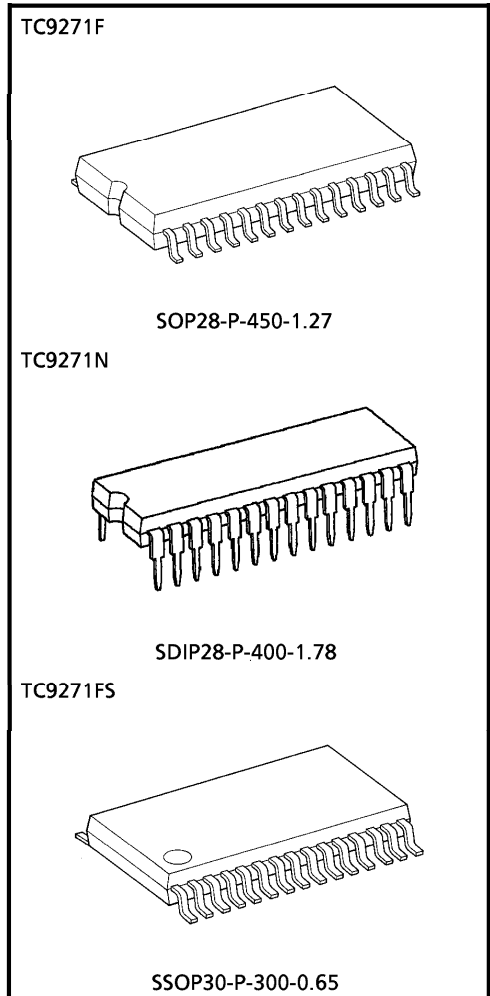


Weight
 SOP28-P-450-1.27 : 0.8 g (Typ.)
 SDIP28-P-400-1.78 : 2.2 g (Typ.)
 SSOP30-P-300-0.65 : 0.17 g (Typ.)

PIN CONNECTION


TC9271F, TC9271N

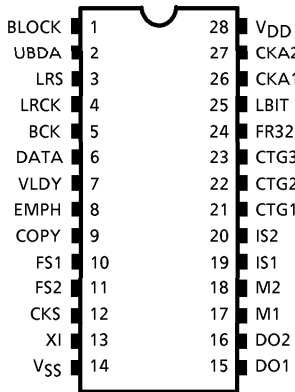

TC9271FS

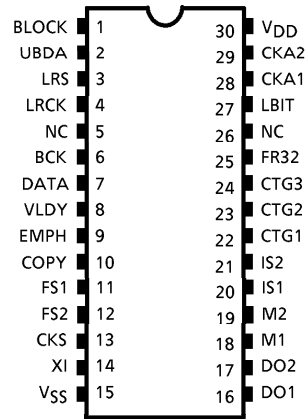

BLOCK DIAGRAM

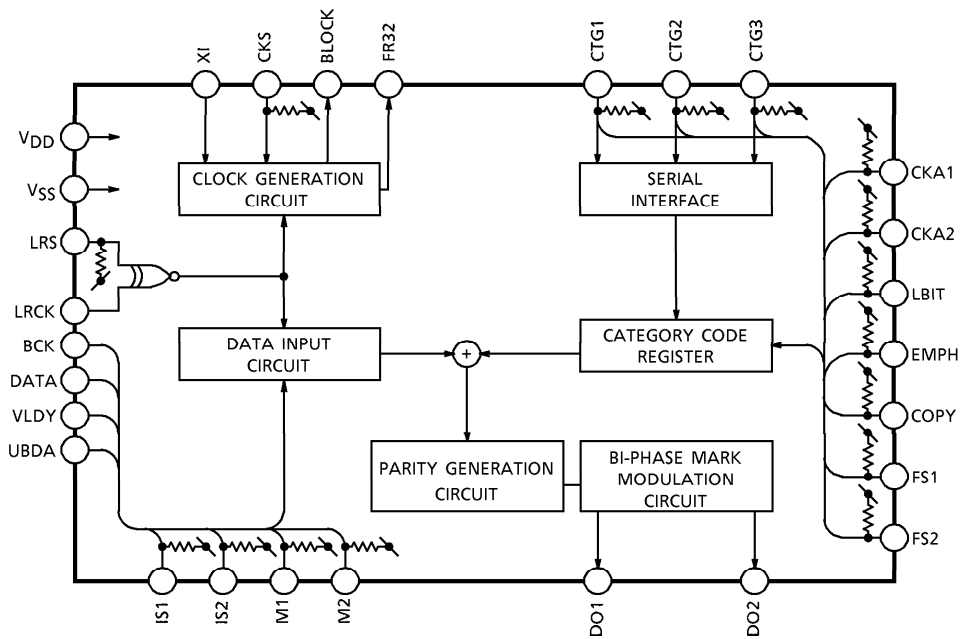

PIN FUNCTION

PIN No.		SYMBOL	I/O	FUNCTION	REMARKS											
TC9271F TC9271N	(*) TC9271FS															
1	1	BLOCK	O	Block top position output pin												
2	2	UBDA	I	User bit data input pin												
3	3	LRS	I	LRCK polarity selection pin <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td rowspan="2">LRS</td> <td colspan="2">LRCK</td> </tr> <tr> <td>L</td> <td>H</td> </tr> <tr> <td>L level</td> <td>R channel data</td> <td>L channel data</td> </tr> <tr> <td>H level</td> <td>L channel data</td> <td>R channel data</td> </tr> </table>	LRS	LRCK		L	H	L level	R channel data	L channel data	H level	L channel data	R channel data	With pull-up resistor
LRS	LRCK															
	L	H														
L level	R channel data	L channel data														
H level	L channel data	R channel data														
4	4	LRCK	I	LR clock input pin												
5	6	BCK	I	Bit clock input pin												
6	7	DATA	I	2 ch Data input pin	4 ch Data input pin 1											
7	8	VLDY	I	2 ch Correction flag input pin	4 ch Data input pin 1											
8	9	EMPH	I	Emphasis flag setting pin	With pull-up resistor											
9	10	COPY	I	P Copy flag setting pin	S Fixes to high. With pull-up resistor											
10	11	FS1	I	Sampling frequency setting pin 1	With pull-up resistor											
11	12	FS2	I	Sampling frequency setting pin 2	With pull-up resistor											
12	13	CKS	I	Clock divider selection pin	With pull-up resistor											
13	14	XI	I	Clock input pin												
14	15	V _{SS}	—	Ground pin												
15	16	DO1	O	Digital data output pin 1												
16	17	DO2	O	Digital data output pin 2												
17	18	M1	I	Channel mode setting pin 1	Select 2 ch or 4 ch mode. With pull-up resistor											
18	19	M2	I	Channel mode setting pin 2												
19	20	IS1	I	Data input mode setting pin 1	With pull-up resistor											
20	21	IS2	I	Data input mode setting pin 2	With pull-up resistor											
21	22	CTG1	I	P Category code setting pin 1	S Data input pin With pull-up resistor											
22	23	CTG2	I	P Category code setting pin 2	S Clock input pin With pull-up resistor											
23	24	CTG3	I	P Category code setting pin 3	S Latch pulse input With pull-up resistor											
24	25	FR32	O	FR32 output pin												
25	27	LBIT	I	P LBIT input pin	S 32 / 192 bit switching pin With pull-up resistor											
26	28	CKA1	I	P Clock accuracy setting pin 1	S Fixes to high. With pull-up resistor											
27	29	CKA2	I	P Clock accuracy setting pin 2	S Prohibits output at high level. With pull-up resistor											
28	30	V _{DD}	—	Power supply pin												

(Note) : In the above pin description, "2 ch" indicates 2 channel mode; "4 ch", 4 channel mode. "P" indicates parallel mode; "S", serial mode. For mode settings, use FS1 (pin 10) and FS2 (pin 11).

(*) : Pin 5 and pin 26 of TC9271FS are NC pin.

OPERATIONAL DESCRIPTION

1. Internal mode setting

1-1. 2 ch mode and 4 ch mode setting

To switch between 2 ch mode and 4 ch mode, use both the M1 and M2 pins.

The 4ch mode is further divided into two modes. In one mode, data are output from two channels from both output pins, DO1 and DO2. In the other mode, data are output from four channels from one output pin (DO1 output = DO2 output).

Two modes are also supported for inputting data. In the first mode, two channels of data are input from two input pins, DATA and VLDY. In the second mode, four channels of data are input from one input pin.

Table 1 2 Channel and 4 Channel Mode Setting

MODE SETTING		INPUT SIGNAL				OUTPUT SIGNAL		Comment
M2 PIN	M1 PIN	LRCK PIN	BCK PIN	DATA PIN	VLDY PIN	DO2 PIN	DO1 PIN	
L	L	Lrck	Bck	Din1	Valid	Dit1	Dit1	2 ch mode
L	H	Lrck	Bck	Din1	Din2	Dit2	Dit1	
H	L	Lrck	Bck	Din1	Din2	Dit1 + 2	Dit1 + 2	
H	H	Frck	Bck	Din1 + 2	Wdck	Dit1 + 2	Dit1 + 2	

(Note) : Adding validity flag

A validity flag can be added in 2 channel mode. However, in 4 channel mode, the flag is fixed to low, as VLDY (pin 7) functions as a data or clock input pin in this mode.

The signals in Table 1 are as follows.

- Lrck : Left channel and right channel selection clock
- Bck : Bit clock
- Frck : Frame clock (4 channel mode)
- Valid : Validity flag
- Wdck : Word clock (4 channel mode)
- Din1, Din2 : 2 channel multiplexed input data
- Din1 + 2 : 4 channel multiplexed input data
- Dit1, Dit2 : 2 channel multiplexed output data
- Dit1 + 2 : 4 channel multiplexed output data

1-2. Data input mode setting

Two data input modes are supported : LSB-first mode and MSB-first mode. Effective data are assumed to be before the change point of LRCK. However, MSB-first mode supports three input data bit length settings.

Table 2 shows the data input modes. In modes where up to 24 bit can be input, input the unused bits fixed to 0.

Table 2 Data Input Modes

SELECTION SIGNAL		INPUT FORMAT			
IS2 PIN	IS1 PIN	INPUT FORMAT	DATA POSITION	NUMBER OF BITS	NUMBER OF BCK
L	L	LSB first	A	24 max.	At least 24 clocks / ch
L	H	MSB first	B	24 max.	32 clocks / ch
H	L		A	20	At least 20 clocks / ch
H	H		A	16	At least 16 clocks / ch

A : Effective data before the change point of LRCK .
 B : Effective data after the change point of LRCK .

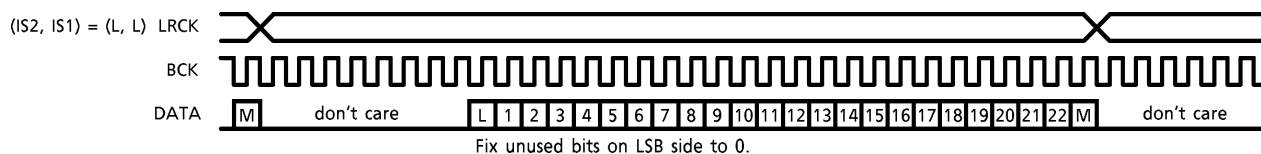


Figure 1a Data Input Format Example 1
 ((IS2, IS1) = (L, L); effective data before the change point of LRCK, 24 bit / ch max.)

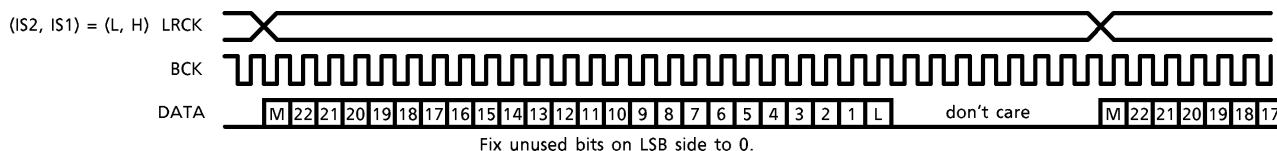


Figure 1b Data Input Format Example 2
 ((IS2, IS1) = (L, H); effective data after the change point of LRCK, 24 bit / ch max.)

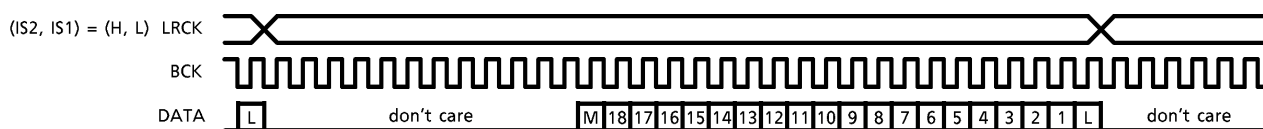


Figure 1c Data Input Format Example 3
 ((IS2, IS1) = (H, L); effective data before the change point of LRCK, 20 bit / ch)

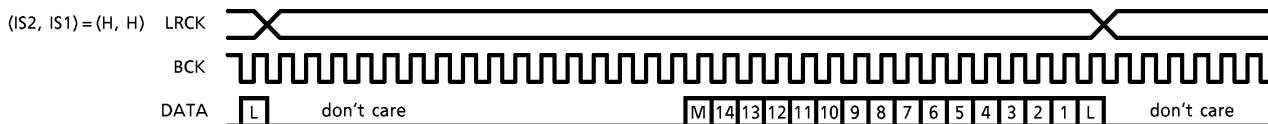


Figure 1d Data Input Format Example 4
 ((IS2, IS1) = (H, H); effective data before the change point of LRCK, 16 bit / ch)

1-3. User bits and validity flag input format

Synchronize the user bits and validity flag with the audio data. Because the validity input pin (VLDY) is used as a data or word clock input pin in other than 2 channel mode, the output data validity flag is fixed to 0.

Figure 2 shows the input timings.

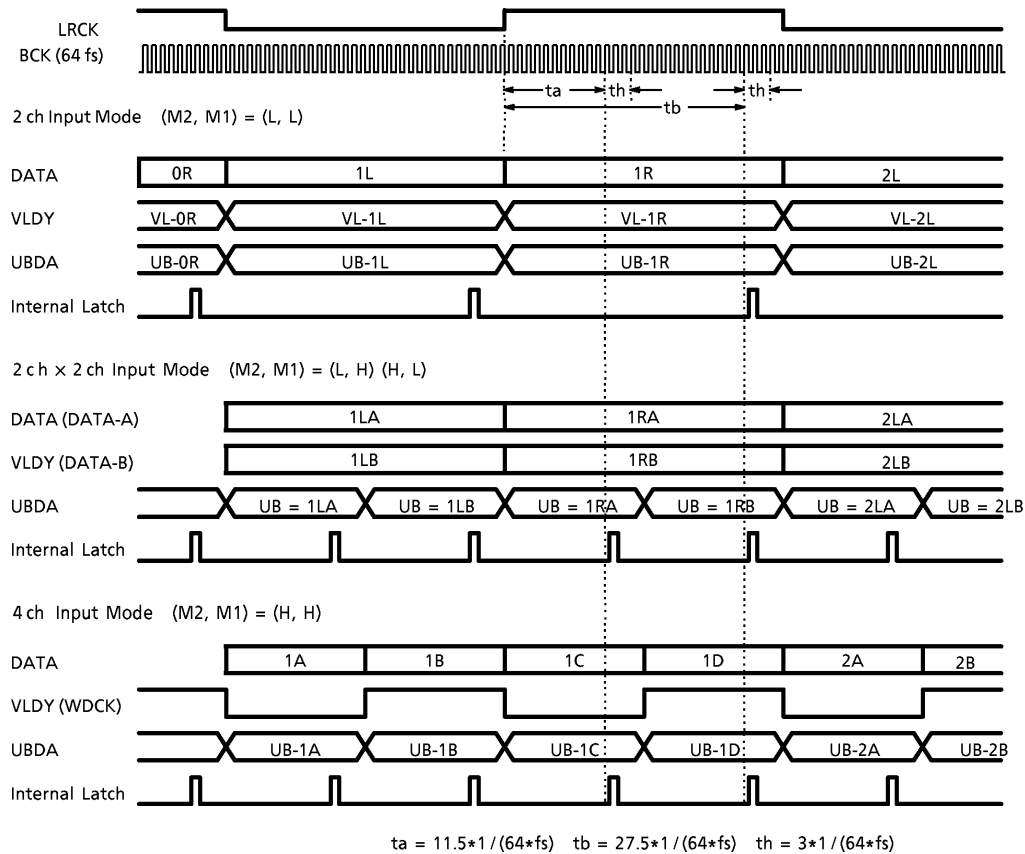


Figure 2 V and U Bit Input Timing Chart

1-4. LR clock polarity setting

The LRCK input polarity can be switched using the LRS pin. In 4 channel mode, when the LRCK polarity is reversed, the Frck (frame clock) and Wdck (word clock) polarities are also reversed, as in Figure 3b.

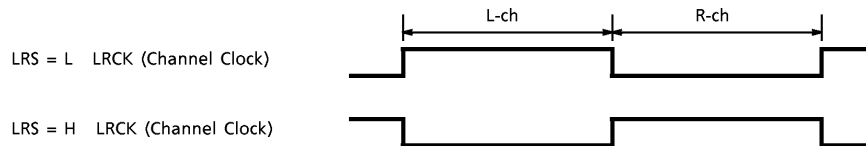


Figure 3a LRCK Polarity Setting Example in 2 ch Mode

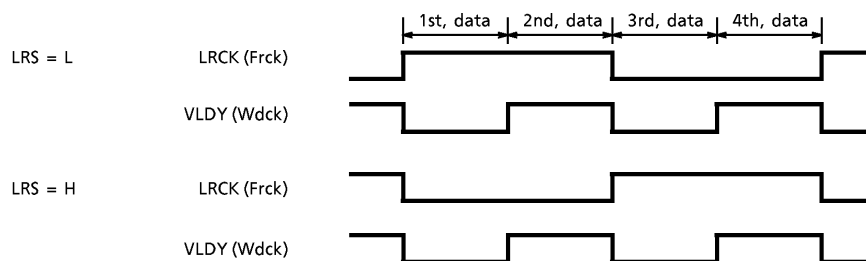


Figure 3b LRCK Polarity Setting Example in 4 ch Mode

1-5. System clock setting

The CKS pin is used to divide the clock input from XI by two is set. It is possible to compare the phase of the clock input to LRCK with the phase of the internal divided clock to automatically determine whether the clock input from the XI pin is a 256 fs- or a 384 fs-type clock.

Table 4 Clock Divider Setting

CKS PIN	CLOCK INPUT FROM XI PIN
L	256 fs / 384 fs
H	512 fs / 768 fs

(Note) : "fs" is the sampling frequency.
 When the 384 fs-type clock is input with CKS = low, the duty cycle must be controlled.

1-6. Data input/output formats

When LRS = high, the input/output formats depending on mode are as follows.

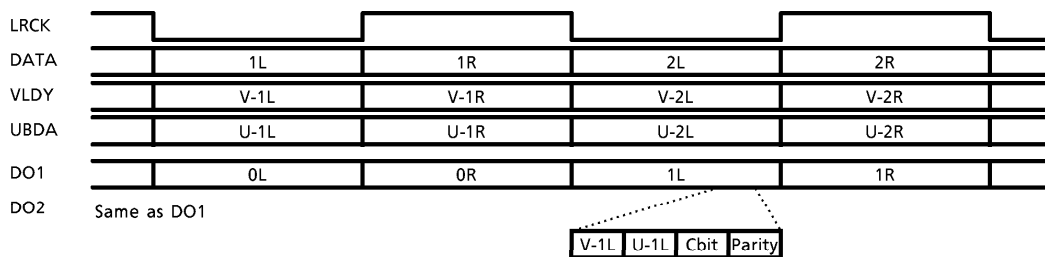


Figure 4a Data Input/Output Format Example 1 ((M2, M1) = (L, L) ; 2 ch input, 2 ch output mode)

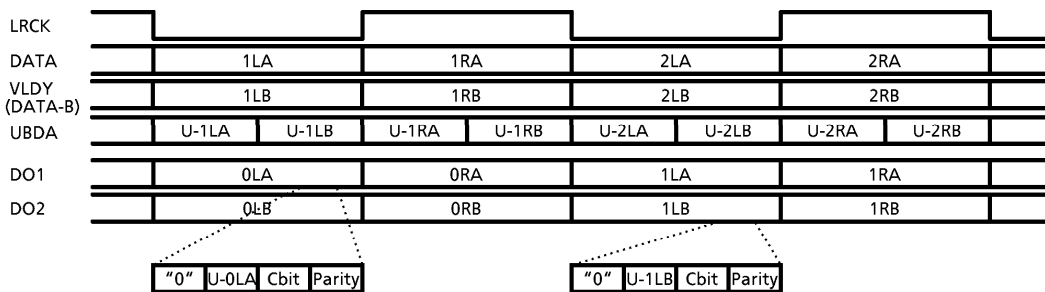


Figure 4b Data Input/Output Format Example 2 ((M2, M1) = (L, H) ; 2 ch x 2 input, 2 ch x 2 output mode)

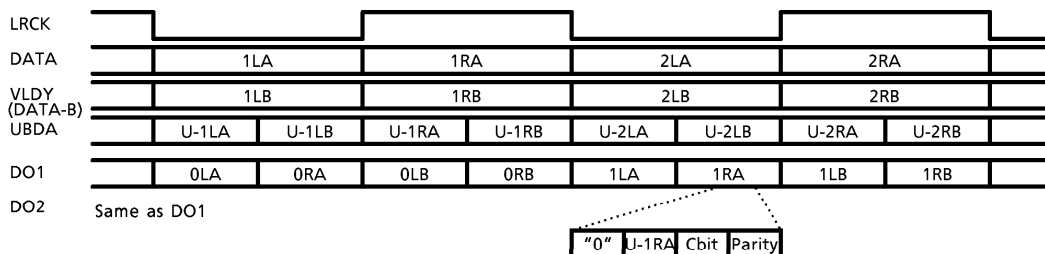


Figure 4c Data Input/Output Format Example 3 ((M2, M1) = (H, L) ; 2 ch x 2 input, 4 ch output mode)

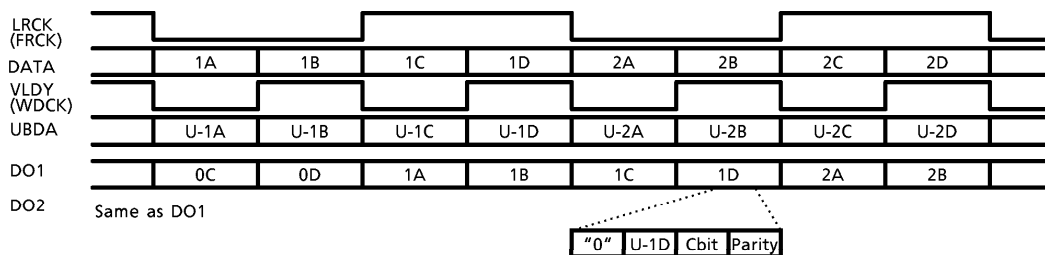


Figure 4d Data Input/Output Format Example 4 ((M2, M1) = (H, H) ; 4 ch input, 4 ch output mode)

2. Channel status setting

The channel status can be set by two methods. The first method is parallel DC setting. The second method is serial setting using a microcontroller. (Table 7)

The EMPH flag in channel status is set to the OR of the parallel data and the serial data in serial mode.

Time Slot

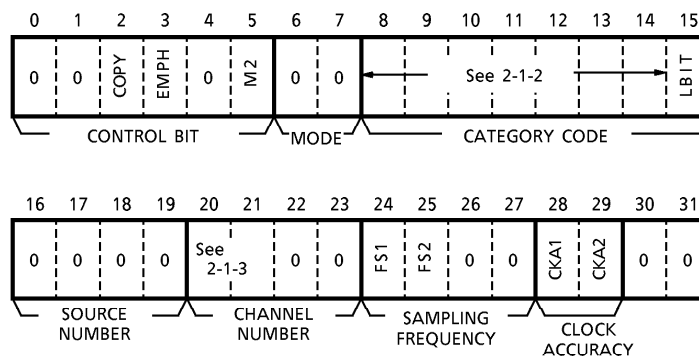


Figure 5 Channel Status Bit Correspondence

2-1. Parallel mode

This mode is used to make parallel DC setting of the channel status.

Figure 5 shows the bits which can be set. In Figure 5, "0" indicates that the bit is fixed to 0. Accordingly, in home digital audio equipment, the mode is fixed to 00 and the source number to 0000.

2-1-1. Control bit setting ;

Fixing three of the six control bits to 0 results in the following limitations.

- (a) Time Slot 0 = 0 ; Only for home equipment
- (b) Time Slot 1 = 0 ; Only for audio data
- (c) Time Slot 4 = 0 ; Only for fixing emphasis to 50 / 15 μ s

Bits other than these can be DC-set directly from the pin.

- (a) Time Slot 2 = COPY ; When COPY pin = H, no copy protection
When COPY pin = L, copy protection (Copying inhibited)
- (b) Time Slot 3 = EMPH ; When EMPH pin = H, emphasis is 50 / 15
When EMPH pin = L, no emphasis
- (c) Time Slot 5 = M2 ; For 2 channel output per output pin, set to two channels
For 4 channel output per output pin, set to four channels

2-1-2. Category code setting ;

The category code is set using pins CTG1~3.

The category bits shown in Table 5 as "L" can be freely set using the LBIT pin. For details, refer to the EIAJ CP-1201 standards.

Table 5 Category Code Setting

CTG			CATEGORY	
3	2	1		
0	0	0	General format	[000 00000]
		1	Digital mixer	[010 0100L]
	1	0	Sample rate converter	[010 1100L]
		1	Digital sampler	[010 0010L]
1	0	0	ADC (no copy right)	[011 0000L]
		1	ADC (copy right)	[011 0100L]
	1	0	Synthesizer	[101 0000L]
		1	Microphone	[101 1000L]

2-1-3. Channel number setting ;

In 2 channel mode, the channel number is added automatically. In 4 channel mode, all the bits are fixed to 0.

Table 6 shows the specific details.

Table 6 Channel Number Addition Correspondence

PIN NAME			CHANNEL NUMBER	
M2	M1	LRCK	LRS = H	LRS = L
L	L	L	[1000]	[0100]
		H	[0100]	[1000]
L	H	L	[1000]	[0100]
		H	[0100]	[1000]
Other combinations			[0000]	

2-1-4. Sampling frequency setting ;

Pins FS1 and FS2 are used for setting the sampling frequency.

Table 7 Sampling Frequency Setting

PIN INPUT		SETTING DATA		SETTING MODE (PINS CTG1~3, LBIT, CKA1~2)
FS1	FS2	SAMPLING FREQUENCY	[TS24-27]	
L	L	44.1 kHz	[0000]	Parallel mode
L	H	48 kHz	[0100]	
H	H	32 kHz	[1100]	
H	L	Setting by serial data transfer		Serial mode

(Note) : When FS1 = high and FS2 = low, serial mode is set. Thus, the mode becomes momentarily serial mode when the sampling frequency switches, momentarily disturbing clocks and data.

2-1-5. Clock accuracy bit setting ;

Use the CKA1 and CKA2 pins to set the clock accuracy. The following describes the modes.

(a) Standard mode (level II) ;

When setting to output disable mode, change CKA1 and CKA2 from low to high.

(b) Variable pitch mode (level III) ;

When setting to output disable mode, change CKA1 only from low to high and keep CKA2 high.

(c) Accuracy mode (level I) ;

When setting to output disable mode, change CKA2 only from low to high and keep CKA1 high.

Table 8 Clock Accuracy Setting

PIN INPUT		SETTING DATA		DO1, DO2 OUTPUT STATUS
CKA1	CKA2	CLOCK ACCURACY	[TS28, 29]	
L	L	Level II	[00]	Normal output
L	H	Level III	[01]	
H	L	Level I	[10]	
H	H	DO1 and DO2 output fixed to low (output disable mode)		

(Note) : When (CKA1, CKA2) = (H, H), output disable mode for digital data is entered, and DO1 and DO2 output is fixed to low.

2-2. Serial mode

This mode is used to serially set data for the channel status using a microcontroller.

As Table 9 shows, in serial mode some pin functions differ from those in parallel mode.

Table 9 Pin Functions in Serial Mode

PIN NAME	FUNCTION	REMARKS
EMPH	EMPH flag input	The flag is set based on the OR of EMPH and serial data.
COPY	— (Fixed to high)	
FS1	— (Fixed to high)	Set for serial mode
FS2	— (Fixed to low)	
CTG1	Data input	Channel status processing
CTG2	Clock input	
CTG3	Latch pulse input	
LBIT	32 / 192 bit switching	
CKA1	— (Fixed to high)	
CKA2	DO1 / 2 output setting	Set to high to disable DO1 and DO2 pin output.

(Note 1) : As channel status data, the EMPH flag uses the OR of the parallel data and serial data.

(Note 2) : The channel number (TIME SLOT 20 and 21 in Figure 5) is automatically set. (Effective only in 2 channel mode. (M2 pin = low))

(Note 3) : The serial setting register consists of 32 bit. To reset (clear) this register at power on, set to parallel mode. That is, fixing FS2 to low, set the FS1 pin to low at power on then to high.

2-2-1. Channel status input ;

The 32 and 192 bit input modes are supported to serially input the channel status.

(1) 32 bit input ; (LBIT = high)

This mode is used to input only 32 bit from the start of the channel status.
The timing of the data is conditioned to make them effective from the next block.

(2) 192 bit input ; (LBIT = low)

This mode is used to input all 192 channel status bits.
Input 192bit (32 × 6) data in sync with the FR32 and BLOCK signals. Because the internal register consists of 32 bit, input 32 bit data before the FR32 falling edge.
In this mode, 0~31 frames of input data are input while BLOCK output is high. Figure 6 is an input timing example.

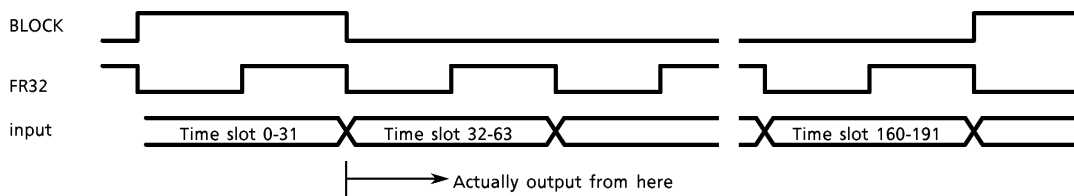


Figure 6 192 Bit Input Timing Example

2-2-2. Serial Interface

The serial interface processes data, clocks, and latch signals. Figure 7 shows an example of serial interface timing.

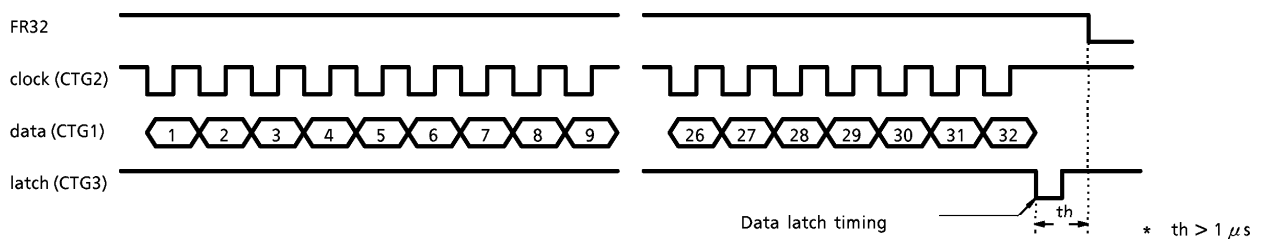


Figure 7 Serial Interface Timing Example

Data are latched at the clock rising edge.

In 192 bit input mode, data are latched to the internal registers at each falling edge of FR32. Accordingly, input the data between the FR32 falling edge and the next falling edge. An interval of at least 1 μs is required between the latch signal and the FR32 falling edge.

MAXIMUM RATINGS (Ta = 25°C)

ITEM	SYMBOL	RATING	UNIT
Power Supply Voltage	V _{DD}	-0.3~6.0	V
Input Voltage	V _{in}	-0.3~V _{DD} + 0.3	V
Power Dissipation	TC9271F	600	mW
	TC9271N	800	
	TC9271FS	350	
Operating Temperature	T _{opr}	-35~85	°C
Storage Temperature	T _{stg}	-55~150	°C

ELECTRICAL CHARACTERISTICS (Unless otherwise specified, Ta = 25°C, V_{DD} = 5 V)

DC characteristics

ITEM	SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Operating Power Supply Voltage	V _{DD}	—	Ta = -35~85°C	4.5	5.0	5.5	V	
			Ta = -35~60°C (*1)	2.7	3.0	3.3		
Current Consumption	I _{DD}	—	XI = 16.9 MHz CKS = low level	—	5	15	mA	
Input Voltage	"H" Level	V _{IH}	—	(*2)	V _{DD} × 0.8	V _{DD}	V	
	"L" Level	V _{IL}	—	(*2)	0.0	V _{DD} × 0.2		
Input Current	"H" Level	I _{IH}	—	(*2), V _{IN} = V _{DD}	—	—	1.0	μA
	"L" Level	I _{IL}	—	(*3), V _{IN} = 0 V	-1.0	—	—	
Output Current	"H" Level	I _{OH}	—	(*4), V _{OH} = 4.5 V	—	—	-1.6	mA
	"L" Level	I _{OL}	—	(*4), V _{OL} = 0.5 V	3.0	—	—	
Pull-up Resistance	RUP	—	(*5)	—	100	—	kΩ	

(*1) : At the low-voltage using, normal speed mode is guaranteed.

(*2) : All input pins

(*3) : All input pins other than (*5)

(*4) : All output pins

(*5) : All pins with pull-up resistor

AC characteristics

ITEM	SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Frequency	f _{opr}	—		7.5	16.9	40.0	MHz
Input Frequency	f _{LR}	—	LRCK duty cycle = 50%	30.0	44.1	100.0	kHz
	f _{BCK}	—	BCK duty cycle = 50%	0.96	1.41	6.40	
Rising Time	t _r	—	Pins LRCK, BCK, DATA, and XI (10~90%)	—	—	15	ns
Falling Time	t _f	—		—	—	15	
Delay Time	t _d	—	BCK falling edge → LRCK, DATA	—	—	40	

(1) Clock and data output timings

ITEM	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Rising Time	t_{or}	—	Pins BLOCK, DO1, DO2, and FR32 (10~90%)	—	—	20	ns
Output Falling Time	t_{of}			—	—	20	


(2) Microcontroller interface timing (in serial mode)

ITEM	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Strobe Pulse Width	t_{WP}	—	CTG3	0.5	—	—	μ s
Clock Pulse Width	"H" Level	t_{WH}	CTG2	1.0	—	—	
	"L" Level	t_{WL}	CTG2	1.0	—	—	
Hold Time	t_{HLD}	—	CTG1 → CTG2	0.5	—	—	
Delay Time	t_{CL}	—	CTG2 → CTG3	0.5	—	—	

(*6) : In 192 bit serial input mode, set $t_h > 1 \mu$ s.





(*7) : Input data in sync with the clock falling edge.

Data are loaded internally at the clock rising edge.

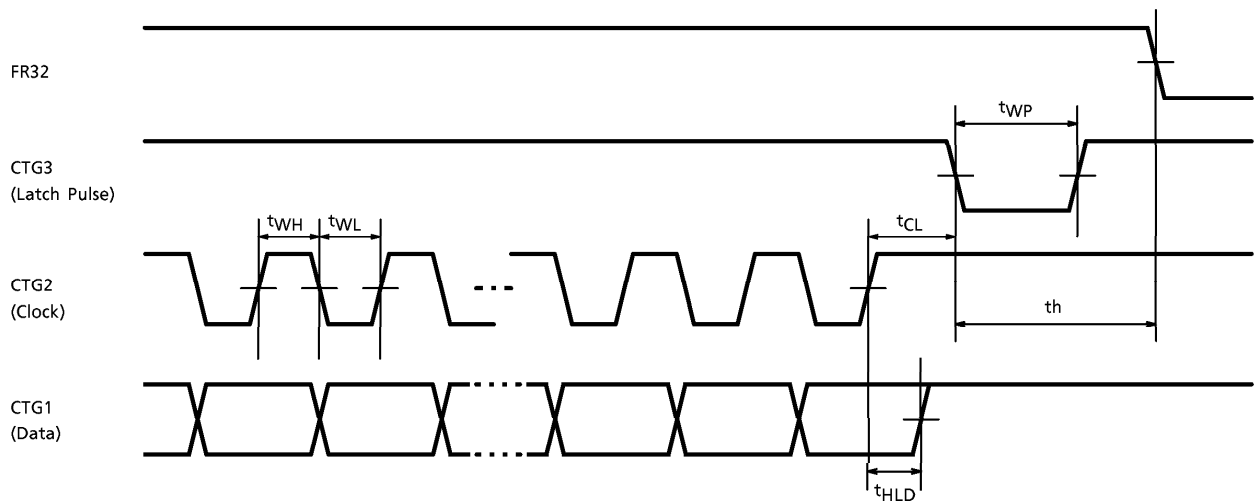

PACKAGE DIMENSIONS
SOP28-P-450-1.27


Unit : mm

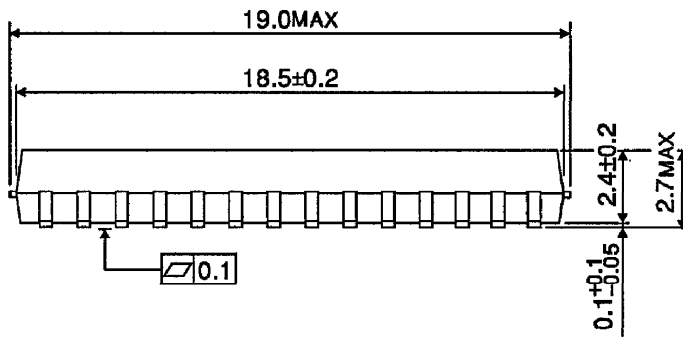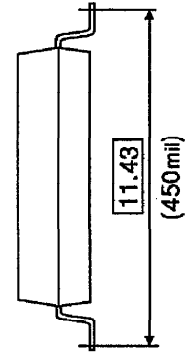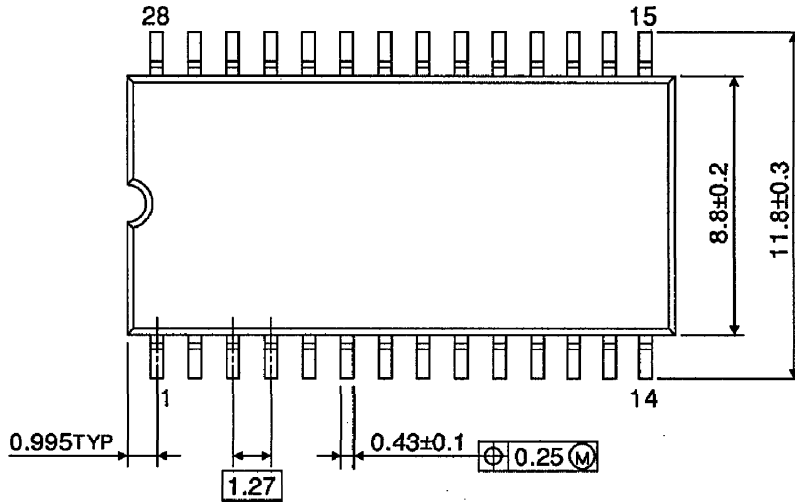

Weight : 0.8 g (Typ.)

PACKAGE DIMENSIONS
SDIP28-P-400-1.78




Unit : mm

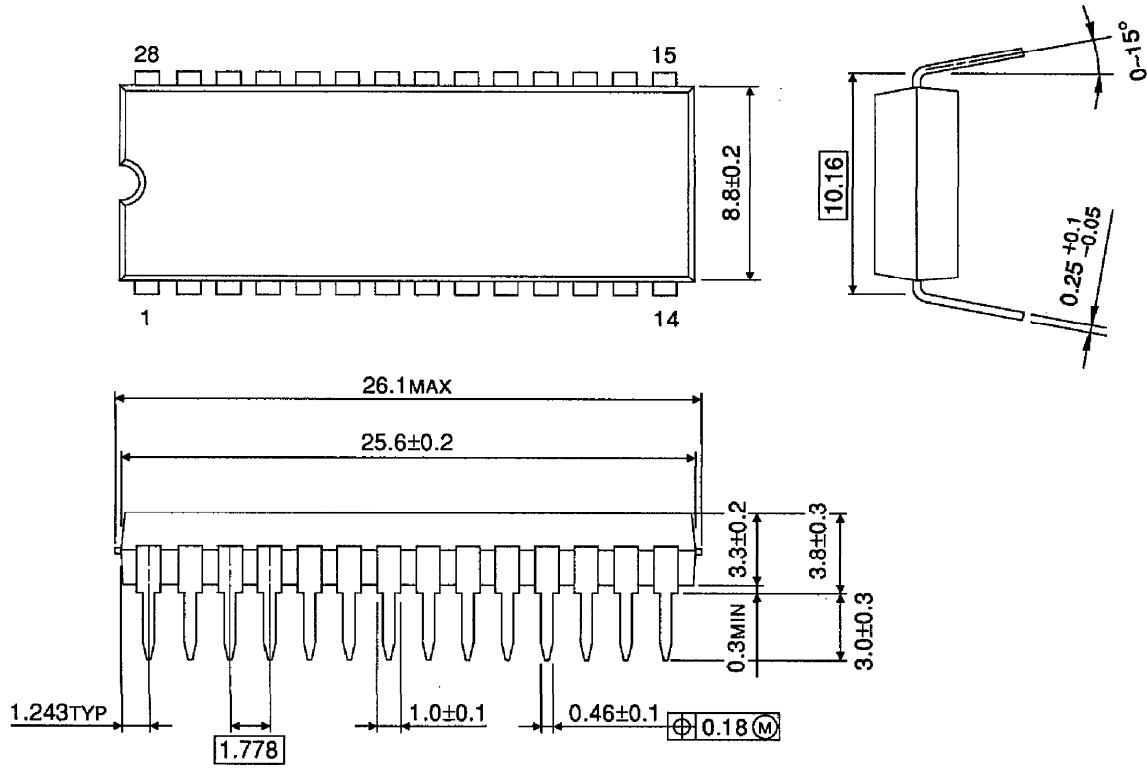

Weight : 2.2 g (Typ.)

PACKAGE DIMENSIONS
SSOP30-P-300-0.65

Unit : mm

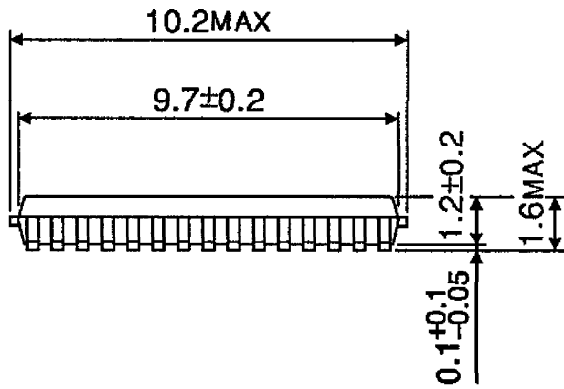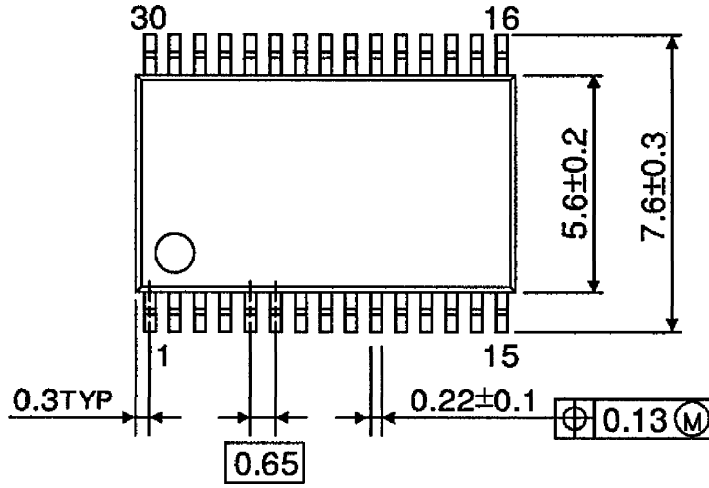

Weight : 0.17 g (Typ.)

RESTRICTIONS ON PRODUCT USE

000707EBA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.