

# New Jersey Semi-Conductor Products, Inc.

20 STERN AVE.  
SPRINGFIELD, NEW JERSEY 07081  
U.S.A.

TELEPHONE: (973) 376-2922  
(212) 227-6005  
FAX: (973) 376-8960

## 1N38B GOLD BONDED GERMANIUM DIODE

### FEATURES

Low forward voltage drop—low power consumption  
Thirty years of proven reliability—one million hours mean time between failures (MTBF)  
Very low noise level  
Metallurgically bonded


### ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	100 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

### ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	100		V	25 °C
Reverse Current	$I_r$	3 V		6	$\mu$ A	25 °C
Reverse Current	$I_r$	100 V		500	$\mu$ A	°C
Forward Voltage	$V_f$	4 mA		1	V	25 °C

### MECHANICAL

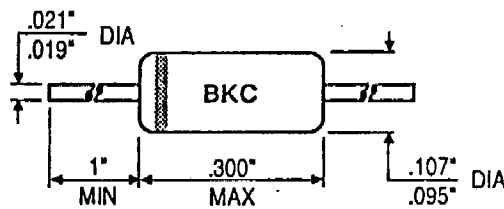

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.

