

HIGH EFFICIENCY FAST RECOVERY RECTIFIER DIODES


FEATURES

- SUITED FOR SMPS
- VERY LOW FORWARD LOSSES
- NEGLIGIBLE SWITCHING LOSSES
- HIGH SURGE CURRENT CAPABILITY
- HIGH AVALANCHE ENERGY CAPABILITY
- INSULATED VERSION TOP3I :
 - Insulating voltage = 2500 V DC
 - Capacitance = 12 pF

DESCRIPTION

Dual center tap rectifier suited for switchmode power supply and high frequency DC to DC converters.

Packaged in SOT93, or TOP3I this device is intended for use in low voltage, high frequency inverters, free wheeling and polarity protection applications.

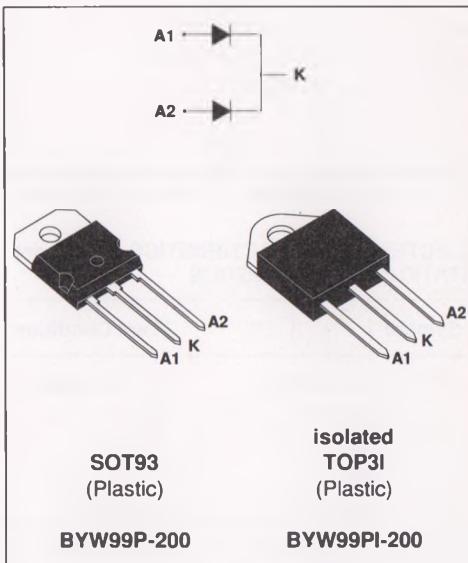

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter				Value	Unit
$I_{F(RMS)}$	RMS forward current		Per diode		35	A
$I_{F(AV)}$	Average forward current $\delta = 0.5$	SOT93	T _c =120°C	Per diode	15	A
		TOP3I	T _c =115°C	Per diode	15	
I_{FSM}	Surge non repetitive forward current		tp=10ms sinusoidal	Per diode	200	A
T_{stg} T_j	Storage and junction temperature range			- 40 to + 150		°C
				- 40 to + 150		°C

Symbol	Parameter	BYW99P-/PI-				Unit
		50	100	150	200	
V_{RRM}	Repetitive peak reverse voltage	50	100	150	200	V

THERMAL RESISTANCE

Symbol	Parameter			Value	Unit
Rth (j-c)	Junction to case	SOT93	Per diode	1.8	°C/W
			Total	1.0	
	TOP3I	TOP3I	Per diode	2.0	
			Total	1.25	
Rth (c)	Coupling	SOT93		0.2	°C/W
		TOP3I		0.5	

When the diodes 1 and 2 are used simultaneously :

$$T_j - T_c \text{ (diode 1)} = P(\text{diode 1}) \times R_{\text{th(j-c)}} \text{ (Per diode)} + P(\text{diode 2}) \times R_{\text{th(c)}}$$

ELECTRICAL CHARACTERISTICS (Per diode)

STATIC CHARACTERISTICS

Symbol	Test Conditions		Min.	Typ.	Max.	Unit
I _R *	T _j = 25°C	V _R = V _{RRM}			20	µA
	T _j = 100°C				1.5	mA
V _F **	T _j = 125°C	I _F = 12 A			0.85	V
	T _j = 125°C	I _F = 25 A			1.05	
	T _j = 25°C	I _F = 25 A			1.15	

Pulse test : * tp = 5 ms, duty cycle < 2 %

** tp = 380 µs, duty cycle < 2 %

To evaluate the conduction losses use the following equation :

$$P = 0.65 \times I_F(AV) + 0.016 \times I_F^2(RMS)$$

RECOVERY CHARACTERISTICS

Symbol	Test Conditions		Min.	Typ.	Max.	Unit
trr	T _j = 25°C	I _F = 0.5A I _R = 1A	I _{rr} = 0.25A		25	ns
		I _F = 1A V _R = 30V	dI _F /dt = -50A/µs		40	
tfr	T _j = 25°C	I _F = 1A V _{FR} = 1.1 x V _F	tr = 10 ns		15	ns
V _{FP}	T _j = 25°C	I _F = 1A	tr = 10 ns		2	V

Fig.1 : Average forward power dissipation versus average forward current.

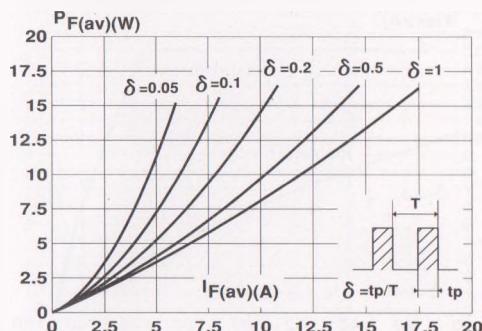


Fig.3 : Forward voltage drop versus forward current (maximum values).

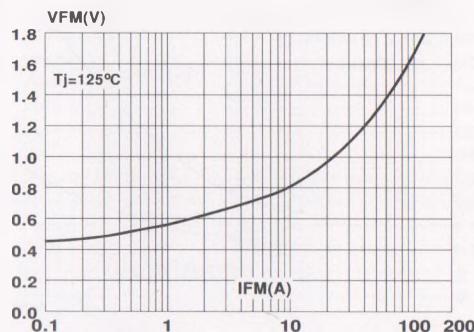


Fig.5 : Non repetitive surge peak forward current versus overload duration.
(SOD93)

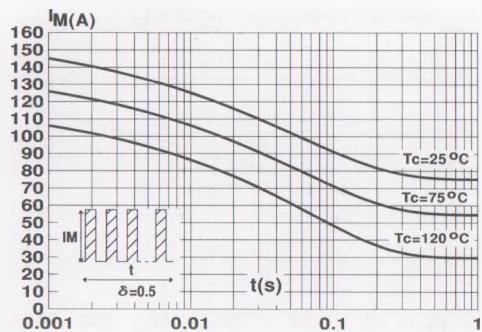


Fig.2 : Peak current versus form factor.

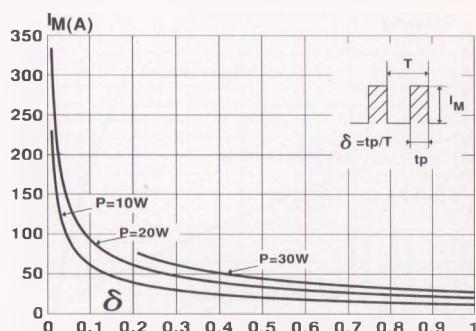


Fig.4 : Relative variation of thermal impedance junction to case versus pulse duration.

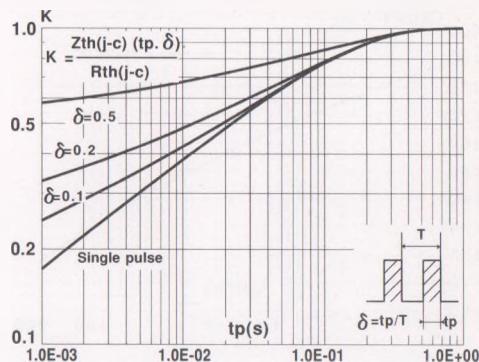


Fig.6 : Non repetitive surge peak forward current versus overload duration.
(TOP3I)

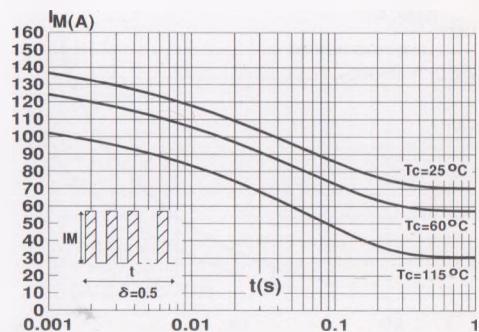


Fig.7 : Average current versus ambient temperature.
(duty cycle : 0.5) (SOD93)

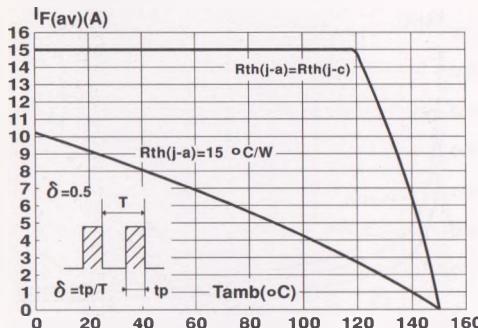


Fig.9 : Junction capacitance versus reverse voltage applied (Typical values).

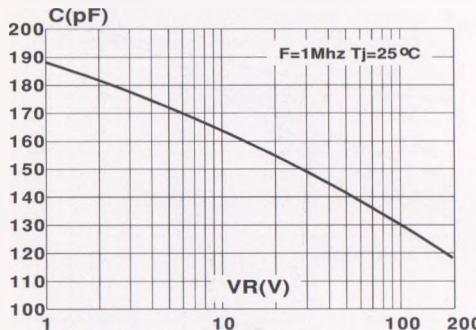


Fig.11 : Peak reverse current versus dIF/dt.

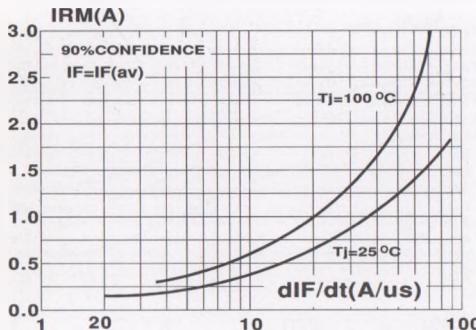


Fig.8 : Average current versus ambient temperature.
(duty cycle : 0.5) (TOP3I)

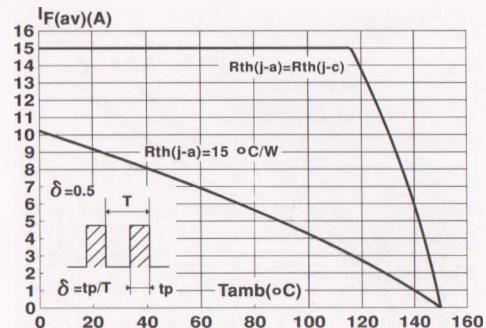


Fig.10 : Recovery charges versus dIF/dt.

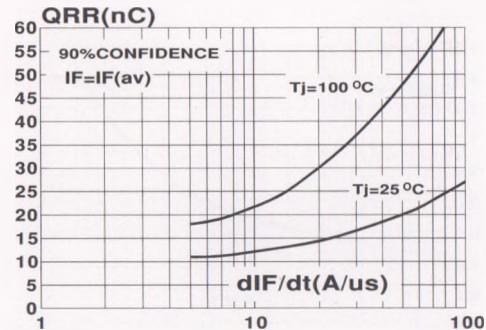


Fig.12 : Dynamic parameters versus junction temperature.

