

Central™
Semiconductor Corp.

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMDH2-3 type is a Silicon Schottky Diode, manufactured in a super-mini surface mount package, designed for fast switching applications requiring a low forward voltage drop.

MARKING CODE: S2



MAXIMUM RATINGS: ($T_A=25^\circ C$)

	SYMBOL		UNITS
Peak Repetitive Reverse Voltage	V_{RRM}	30	V
Average Forward Current	I_O	200	mA
Forward Surge Current, $t_p=10$ ms	I_{FSM}	1.0	A
Power Dissipation	P_D	250	mW
Operating and Storage			
Junction Temperature	T_J, T_{Stg}	-65 to +150	°C
Thermal Resistance	Θ_{JA}	500	°C/W

ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ C$)

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
BV_R	$I_R=100\mu A$	30			V
V_F	$I_F=2.0mA$		0.26		V
V_F	$I_F=15mA$		0.32		V
V_F	$I_F=100mA$		0.42		V
V_F	$I_F=200mA$		0.49	0.55	V
I_R	$V_R=30V$		0.40	50	μA
C_T	$V_R=10V, f=1.0$ MHz		15		pF

SOD-323 CASE - MECHANICAL OUTLINE

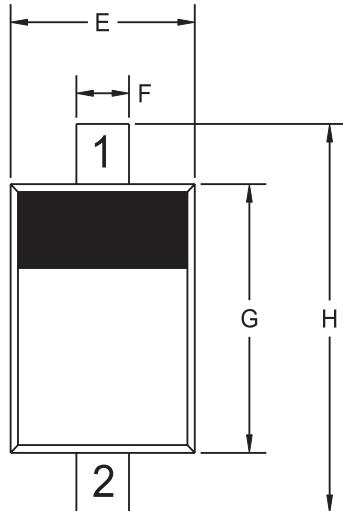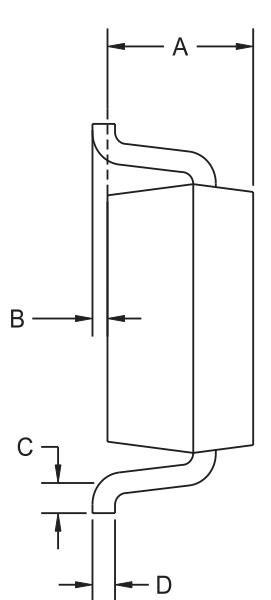

R4

LEAD CODE:

- 1) CATHODE
- 2) ANODE

MARKING CODE: S2

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.031	0.039	0.80	1.00
B	0.000	0.004	0.00	0.10
C	0.008	-	0.20	-
D	0.004	0.007	0.11	0.19
E	0.045	0.053	1.15	1.35
F	-	0.014	-	0.35
G	0.063	0.071	1.60	1.80
H	0.094	0.102	2.40	2.60

SOD-323 (REV: R4)

R2 (31-October 2002)