

1N5186 – SPD5192
3AMP FAST RECOVERY
RECTIFIER 100-1000V

CASE STYLE



FEATURES

- FAST RECOVERY 150 NSEC MAX
- PIV TO 1000 VOLTS
- LOW REVERSE LEAKAGE
- HERMETICALLY SEALED
- SINGLE CHIP CONSTRUCTION

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Peak Repetitive Reverse Voltage and DC Blocking Voltage	$V_{RM (rep)}$ V_R	100 200 400 600 800 1000	Volts
RMS Reverse Voltage	V_r	70 140 280 420 560 700	Volts
Half Wave Rectified Forward Current, Averaged Over Full Cycle (Resistive Load, 60Hz, Sine Wave $T_A = 55^\circ C$)	I_O	3	Amps
Peak Repetitive Forward Current ($T_A = 55^\circ C$, 8.3 ms Pulse, Allow Junction to Reach Equilibrium Between Pulses)	$I_{FM (rep)}$	25	Amps
Peak Surge Current ($T_A = 55^\circ C$, Superimposed on Rated Current at Rated Voltage, 8.3 ms Pulse)	$I_{FM (surge)}$	100	Amps
Operating and Storage Temperature	T_J, T_{stg}	-65 to +200	$^\circ C$

HERMAL CHARACTERISTICS

Characteristics	Symbol	Max	Unit
Thermal Resistance, Junction to Leads, $L = 3/8"$	$R_{\theta JL}$	27	$^\circ C/W$

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.




ELECTRICAL CHARACTERISTICS

Characteristics	Symbol	Value	Unit
Max Full Cycle Forward Voltage Drop, Averaged Over Full Cycle (I_O (Max), 60 Hz, Square Wave, $T_A = 55^\circ\text{C}$)	$V_{F(AV)}$.6	Vdc
Max Instantaneous Forward Voltage Drop ($I_F = 3\text{ A dc}$, $T_A = 25^\circ\text{C}$, 300 μs Pulse)	V_F	1.3	Vdc
Max Full Cycle Reverse Leakage Current, Averaged Over Full Cycle (Rated V_R , 60Hz, Square Wave, $T_A = 100^\circ\text{C}$)	$I_{R(AV)}$	100	$\mu\text{A dc}$
Max Reverse Leakage Current (Rated V_R , $T_A = 25^\circ\text{C}$)	I_R	5	$\mu\text{A dc}$
Max Junction Capacitance ($V_R = 10\text{ V}$, $T_A = 25^\circ\text{C}$)	C_J	40	pf

REVERSE RECOVERY CHARACTERISTICS

Characteristics	Symbol	Min	Typ	Max	Unit
Reverse Recovery Time ($I_F = 500\text{ma}$, $I_R = 1\text{A}$, $I_{RR} = 250\text{ma}$)	t_{rr}	--	--	150	ns
Characteristics	Symbol	Min	Typ	Max	Unit
Reverse Recovery Time ($I_F = 500\text{ma}$, $I_R = 1\text{A}$, $I_{RR} = 250\text{ma}$)	t_{rr}	--	--	250	ns
Characteristics	Symbol	Min	Typ	Max	Unit
Reverse Recovery Time ($I_F = 500\text{ma}$, $I_R = 1\text{A}$, $I_{RR} = 250\text{ma}$) SPD5191 & SPD5192	t_{rr}	--	--	500	ns

PHYSICAL DIMENSIONS

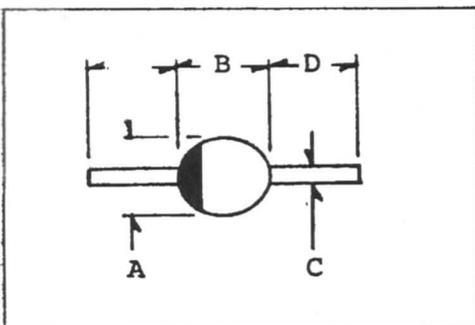

KEY TO DIMENSIONS:

(Inches)

- A = .170 - .250
- B = .240 - .260
- C = .048 - .052
- D = 1.10 Min.