

Silicon NPN Power Transistor

MJ16014

DESCRIPTION

- Collector-Emitter Sustaining Voltage-
: $V_{CEO(SUS)} = 450V(\text{Min})$
- High Switching Speed

APPLICATIONS

- Designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line operated switch-mode applications.

Typical applications:




- Switching regulators
- Inverters
- Solenoid and relay drivers
- Motor controls
- Deflection circuits

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CEV}	Collector-Emitter Voltage	850	V
$V_{CEO(SUS)}$	Collector-Emitter Voltage	450	V
V_{EBO}	Emitter-Base Voltage	6	V
I_C	Collector Current-Continuous	20	A
I_{CM}	Collector Current-Peak	30	A
I_B	Base Current-Continuous	10	A
I_{BM}	Base Current-Peak	20	A
P_C	Collector Power Dissipation@ $T_c=25^\circ\text{C}$	250	W
T_J	Junction Temperature	200	$^\circ\text{C}$
T_{stg}	Storage Temperature	-65~200	$^\circ\text{C}$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance, Junction to Case	0.7	$^\circ\text{C/W}$

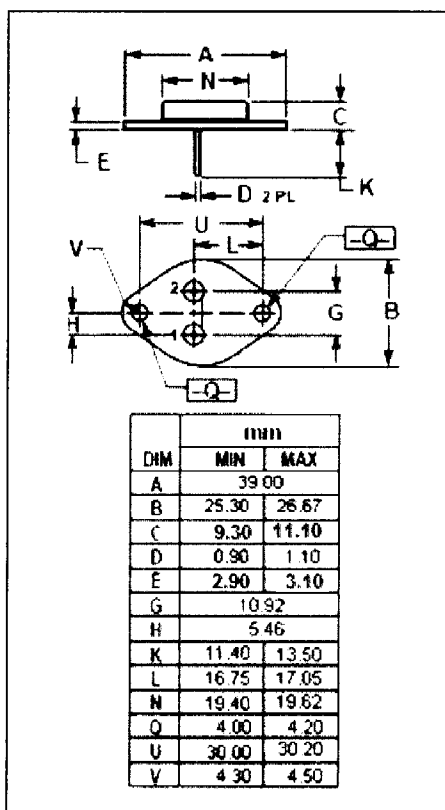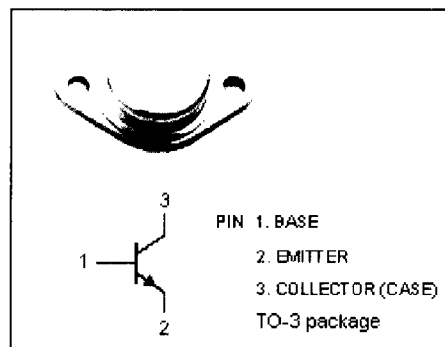

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.

Silicon NPN Power Transistor

MJ16014

ELECTRICAL CHARACTERISTICS

$T_C=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage	$I_C=100\text{mA}$; $I_B=0$	450			V
$V_{CE(sat)-1}$	Collector-Emitter Saturation Voltage	$I_C=10\text{A}$; $I_B=1.3\text{A}$			2.5	V
$V_{CE(sat)-2}$	Collector-Emitter Saturation Voltage	$I_C=15\text{A}$; $I_B=2\text{A}$ $I_C=15\text{A}$; $I_B=2\text{A}$, $T_C=100^{\circ}\text{C}$			3.0 3.0	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C=15\text{A}$; $I_B=2\text{A}$ $I_C=15\text{A}$; $I_B=2\text{A}$, $T_C=100^{\circ}\text{C}$			1.5 1.5	V
I_{CEV}	Collector Cutoff Current	$V_{CEV}=850\text{V}$; $V_{BE(off)}=1.5\text{V}$ $V_{CEV}=850\text{V}$; $V_{BE(off)}=1.5\text{V}$; $T_C=100^{\circ}\text{C}$			0.25 1.5	mA
I_{CER}	Collector Cutoff Current	$V_{CE}=850\text{V}$; $R_{BE}=50\Omega$; $T_C=100^{\circ}\text{C}$			2.5	mA
I_{EBO}	Emitter Cutoff Current	$V_{EB}=6\text{V}$; $I_C=0$			1.0	mA
h_{FE}	DC Current Gain	$I_C=20\text{A}$; $V_{CE}=5\text{V}$	5			
C_{OB}	Output Capacitance	$I_E=0$; $V_{CB}=10\text{V}$; $f_{test}=1.0\text{kHz}$			500	pF

Switching times; Resistive Load

t_d	Delay Time	$I_C=15\text{A}$, $V_{CC}=250\text{V}$, $R_{B2}=1.6\Omega$ $I_{B1}=2\text{A}$; $I_{B2}=-4\text{A}$, $PW=30\mu\text{s}$ Duty Cycle $\leq 2.0\%$		20	50	ns
t_r	Rise Time			200	500	ns
t_s	Storage Time			1200	2700	ns
t_f	Fall Time			200	350	ns