


## PNP Silicon High-Voltage Transistor

- High breakdown voltage
- Low collector-emitter saturation voltage
- Complementary type: SMBTA 42M (NPN)

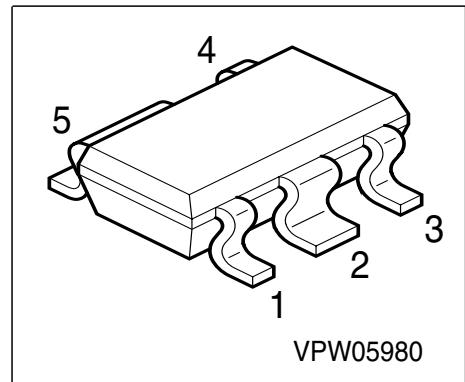

Type	Marking	Pin Configuration					Package
SMBTA 92M	s2D	1 = B	2 = C	3 = E	4=n.c.	5 = C	SCT-595

### Maximum Ratings

Parameter	Symbol	Value	Unit
Collector-emitter voltage	$V_{CEO}$	300	V
Collector-base voltage	$V_{CBO}$	300	
Emitter-base voltage	$V_{EBO}$	5	
DC collector current	$I_C$	500	mA
Base current	$I_B$	100	
Total power dissipation, $T_S \leq 83^\circ\text{C}$	$P_{tot}$	1.5	W
Junction temperature	$T_j$	150	$^\circ\text{C}$
Storage temperature	$T_{stg}$	-65 ... 150	

### Thermal Resistance

Junction ambient 1)	$R_{thJA}$	$\leq 100$	K/W
Junction - soldering point	$R_{thJS}$	$\leq 45$	

1) Package mounted on pcb 40mm x 40mm x 1.5mm / 6cm<sup>2</sup> Cu


**Electrical Characteristics** at  $T_A = 25^\circ\text{C}$ , unless otherwise specified.

<b>Parameter</b>	<b>Symbol</b>	<b>Values</b>			<b>Unit</b>
		<b>min.</b>	<b>typ.</b>	<b>max.</b>	
<b>DC characteristics</b>					
Collector-emitter breakdown voltage $I_C = 100 \mu\text{A}, I_B = 0$	$V_{(\text{BR})\text{CEO}}$	300	-	-	V
Collector-base breakdown voltage $I_C = 100 \mu\text{A}, I_B = 0$	$V_{(\text{BR})\text{CBO}}$	300	-	-	
Emitter-base breakdown voltage $I_E = 10 \mu\text{A}, I_C = 0$	$V_{(\text{BR})\text{EBO}}$	5	-	-	
Collector cutoff current $V_{CB} = 200 \text{ V}, I_E = 0$	$I_{\text{CBO}}$	-	-	250	nA
Collector-base cutoff current $V_{CB} = 200 \text{ V}, T_A = 150^\circ\text{C}$	$I_{\text{CBO}}$	-	-	20	µA
Emitter cutoff current $V_{EB} = 3 \text{ V}, I_C = 0$	$I_{\text{EBO}}$	-	-	100	nA
DC current gain 1) $I_C = 1 \text{ mA}, V_{CE} = 10 \text{ V}$ $I_C = 10 \text{ mA}, V_{CE} = 10 \text{ V}$ $I_C = 30 \text{ mA}, V_{CE} = 10 \text{ V}$	$h_{\text{FE}}$	25 40 25	- - -	- - -	-
Collector-emitter saturation voltage1) $I_C = 20 \text{ mA}, I_B = 2 \text{ mA}$	$V_{\text{CEsat}}$	-	-	0.5	V
Base-emitter saturation voltage 1) $I_C = 20 \text{ mA}, I_B = 2 \text{ mA}$	$V_{\text{BEsat}}$	-	-	0.9	
<b>AC Characteristics</b>					
Transition frequency $I_C = 10 \text{ mA}, V_{CE} = 20 \text{ V}, f = 100 \text{ MHz}$	$f_T$	50	-	-	MHz
Collector-base capacitance $V_{CB} = 20 \text{ V}, f = 1 \text{ MHz}$	$C_{\text{cb}}$	-	-	6	pF

1) Pulse test:  $t < 300\mu\text{s}$ ; D < 2%


**Total power dissipation**  $P_{\text{tot}} = f(T_A^*; T_S)$

\* Package mounted on epoxy

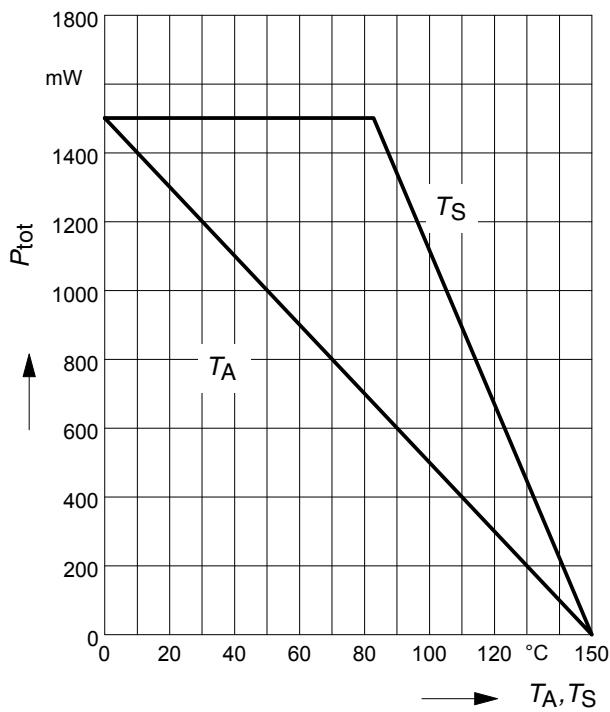


**DC current gain**  $h_{\text{FE}} = f(I_C)$

$V_{\text{CE}} = 10\text{V}$

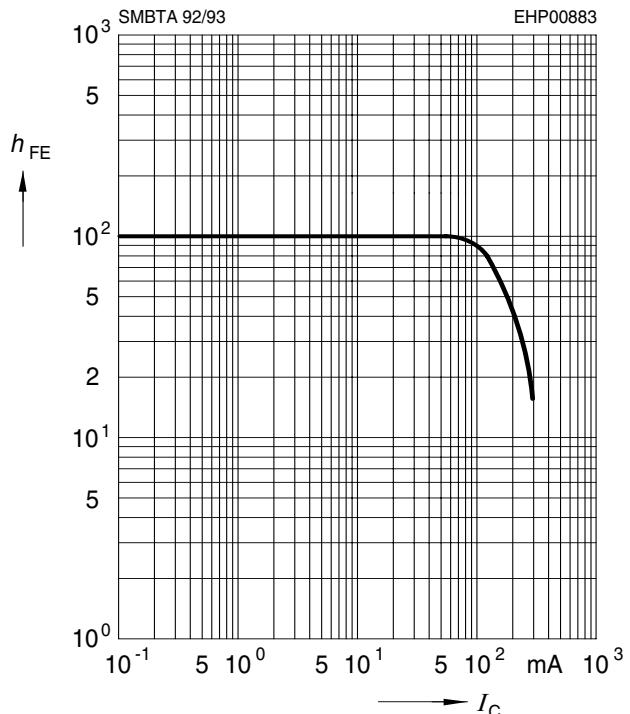


**Permissible Pulse Load**  $R_{\text{thJS}} = f(t_p)$

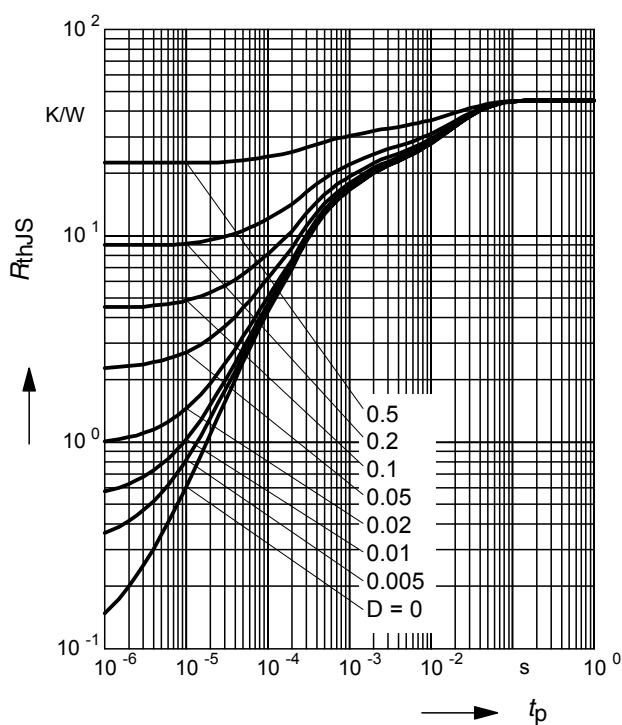


**Permissible Pulse Load**

$P_{\text{totmax}} / P_{\text{totDC}} = f(t_p)$

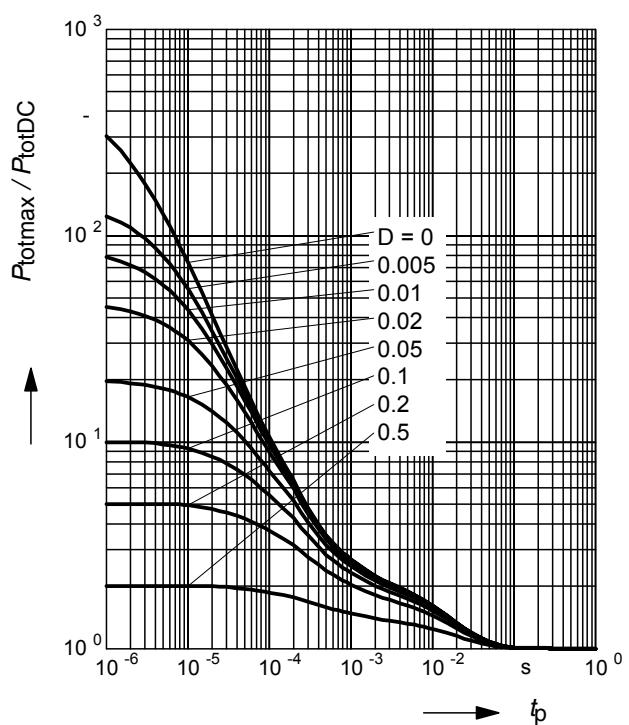

**Collector cutoff current**  $I_{CBO} = f(T_A)$

$V_{CB} = 160V$

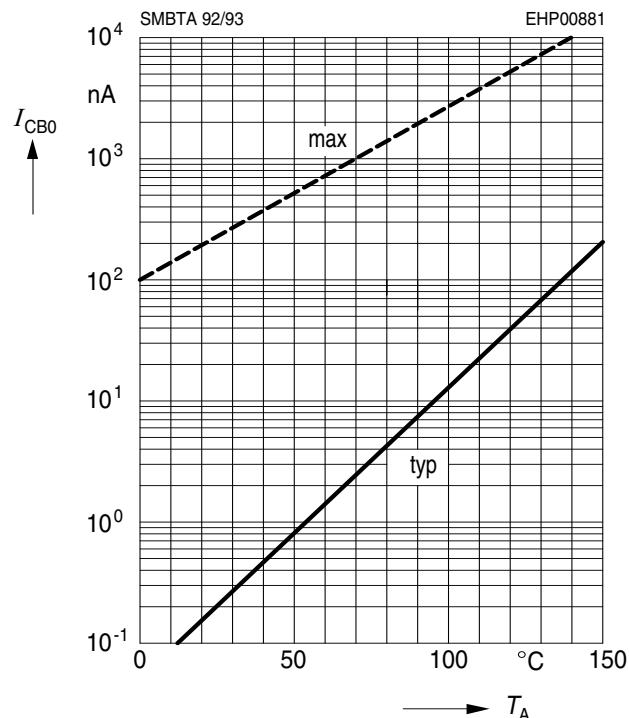

**Collector current**  $I_C = f(V_{BE})$

$V_{CE} = 10V$

