


N-Channel Enhancement-Mode Transistor

Product Summary

$V_{(BR)DSS}$ (V)	$r_{DS(on)}$ (Ω)	I_D (A)
50	0.006	75

TO-220AB



Top View

SUP75N05-06


TO-263



Top View

SUP75N05-06

175°C Rated
Maximum Junction Temperature
TrenchFET™
Power MOSFETs

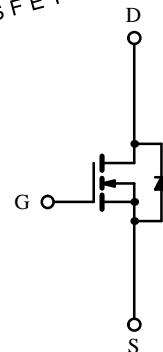

N-Channel MOSFET

Absolute Maximum Ratings ($T_C = 25^\circ\text{C}$ Unless Otherwise Noted)

Parameter		Symbol	Limit	Unit
Gate-Source Voltage		V_{GS}	± 20	V
Continuous Drain Current ($T_J = 175^\circ\text{C}$)	$T_C = 25^\circ\text{C}$	I_D	75 ^a	A
	$T_C = 125^\circ\text{C}$		70	
Pulsed Drain Current		I_{DM}	240	
Avalanche Current		I_{AR}	75	
Repetitive Avalanche Energy ^b	$L = 0.1 \text{ mH}$	E_{AR}	280	mJ
Power Dissipation	$T_C = 25^\circ\text{C}$ (TO-220AB and TO-263)	P_D	187 ^c	W
	$T_A = 25^\circ\text{C}$ (TO-263) ^d		3.7	
Operating Junction and Storage Temperature Range		T_J, T_{Stg}	-55 to 175	°C

Thermal Resistance Ratings

Parameter		Symbol	Limit	Unit
Junction-to-Ambient	PCB Mount (TO-263) ^d	R_{thJA}	40	°C/W
	Free Air (TO-220AB)		62.5	
Junction-to-Case		R_{thJC}	0.8	

Notes

- a. Package limited.
- b. Duty cycle $\leq 1\%$.
- c. See SOA curve for voltage derating.
- d. When mounted on 1" square PCB (FR-4 material).

Subsequent updates to this data sheet may be obtained via facsimile by calling Siliconix FaxBack, 1-408-970-5600. Please request FaxBack document #1488.







Specifications ($T_J = 25^\circ\text{C}$ Unless Otherwise Noted)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Static						
Drain-Source Breakdown Voltage	$V_{(\text{BR})\text{DSS}}$	$V_{\text{GS}} = 0 \text{ V}, I_D = 250 \mu\text{A}$	50			V
Gate Threshold Voltage	$V_{\text{GS}(\text{th})}$	$V_{\text{DS}} = V_{\text{GS}}, I_D = 250 \mu\text{A}$	2.0		4.0	
Gate-Body Leakage	I_{GSS}	$V_{\text{DS}} = 0 \text{ V}, V_{\text{GS}} = \pm 20 \text{ V}$			± 100	nA
Zero Gate Voltage Drain Current	I_{DSS}	$V_{\text{DS}} = 50 \text{ V}, V_{\text{GS}} = 0 \text{ V}$		1		μA
		$V_{\text{DS}} = 50 \text{ V}, V_{\text{GS}} = 0 \text{ V}, T_J = 125^\circ\text{C}$			50	
		$V_{\text{DS}} = 50 \text{ V}, V_{\text{GS}} = 0 \text{ V}, T_J = 175^\circ\text{C}$			150	
On-State Drain Current ^b	$I_{\text{D}(\text{on})}$	$V_{\text{DS}} = 5 \text{ V}, V_{\text{GS}} = 10 \text{ V}$	120			A
Drain-Source On-State Resistance ^b	$r_{\text{DS}(\text{on})}$	$V_{\text{GS}} = 10 \text{ V}, I_D = 75 \text{ A}$		0.005	0.006	Ω
		$V_{\text{GS}} = 10 \text{ V}, I_D = 75 \text{ A}, T_J = 125^\circ\text{C}$			0.010	
		$V_{\text{GS}} = 10 \text{ V}, I_D = 75 \text{ A}, T_J = 175^\circ\text{C}$			0.012	
Forward Transconductance ^b	g_{fs}	$V_{\text{DS}} = 15 \text{ V}, I_D = 60 \text{ A}$	30			S
Dynamic^a						
Input Capacitance	C_{iss}	$V_{\text{GS}} = 0 \text{ V}, V_{\text{DS}} = 25 \text{ V}, f = 1 \text{ MHz}$		4500		pF
Output Capacitance	C_{oss}			1100		
Reverse Transfer Capacitance	C_{rss}			360		
Total Gate Charge ^c	Q_g	$V_{\text{DS}} = 25 \text{ V}, V_{\text{GS}} = 10 \text{ V}, I_D = 75 \text{ A}$		85	120	nC
Gate-Source Charge ^c	Q_{gs}			25		
Gate-Drain Charge ^c	Q_{gd}			25		
Turn-On Delay Time ^c	$t_{\text{d}(\text{on})}$	$V_{\text{DD}} = 25 \text{ V}, R_L = 0.33 \Omega$ $I_D \approx 75 \text{ A}, V_{\text{GEN}} = 10 \text{ V}, R_G = 2.5 \Omega$		20	40	ns
Rise Time ^c	t_r			20	100	
Turn-Off Delay Time ^c	$t_{\text{d}(\text{off})}$			50	100	
Fall Time ^c	t_f			20	40	
Source-Drain Diode Ratings and Characteristics ($T_C = 25^\circ\text{C}$)^a						
Continuous Current	I_S				75	A
Pulsed Current	I_{SM}				200	
Forward Voltage ^b	V_{SD}	$I_F = 75 \text{ A}, V_{\text{GS}} = 0 \text{ V}$		1.0	1.4	V
Reverse Recovery Time	t_{rr}	$I_F = 75 \text{ A}, \text{di/dt} = 100 \text{ A}/\mu\text{s}$		65	120	ns
Peak Reverse Recovery Current	$I_{\text{RM}(\text{REC})}$			5	8	A
Reverse Recovery Charge	Q_{rr}			0.16	0.48	μC



Notes

- a. Guaranteed by design, not subject to production testing.
- b. Pulse test: pulse width $\leq 300 \mu\text{sec}$, duty cycle $\leq 2\%$.
- c. Independent of operating temperature.

Typical Characteristics (25°C Unless Otherwise Noted)

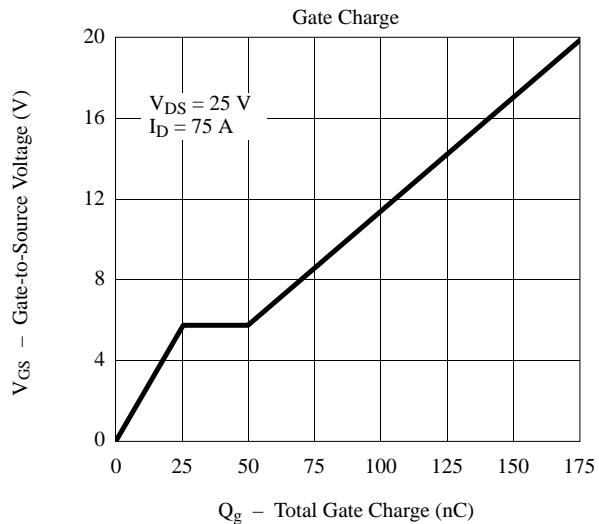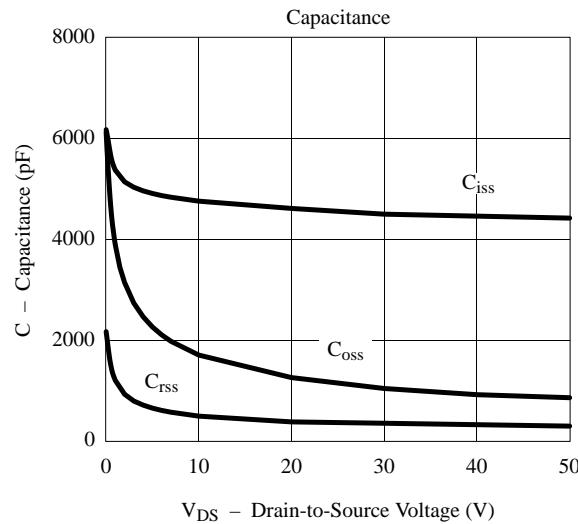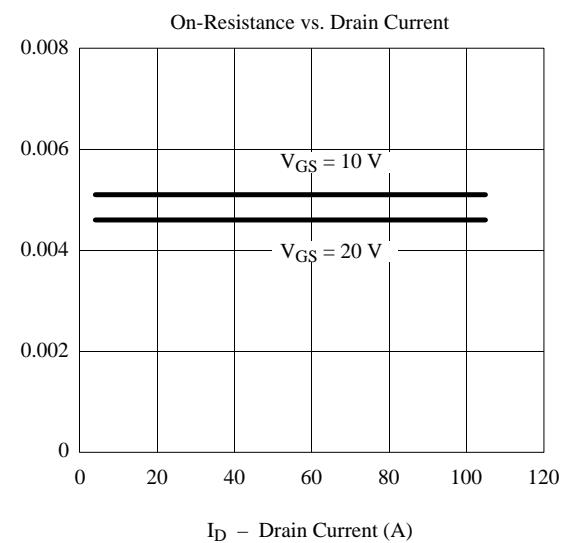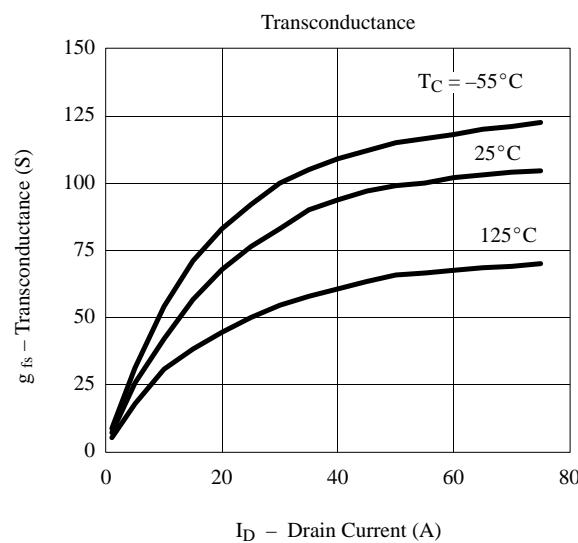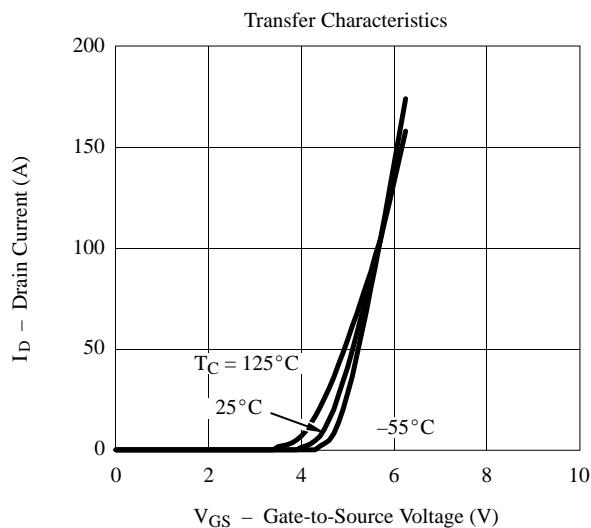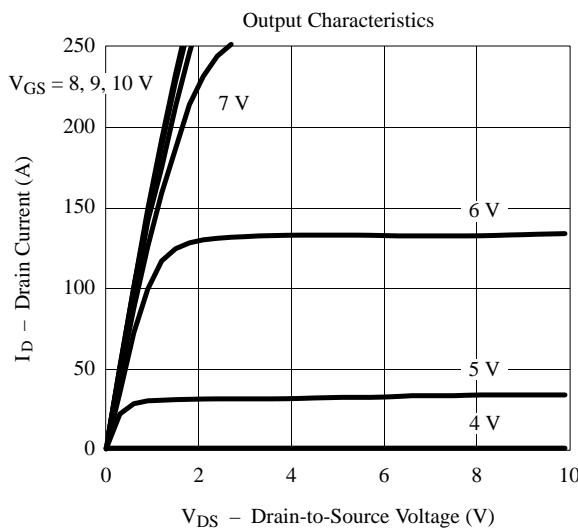

Typical Characteristics (25°C Unless Otherwise Noted)

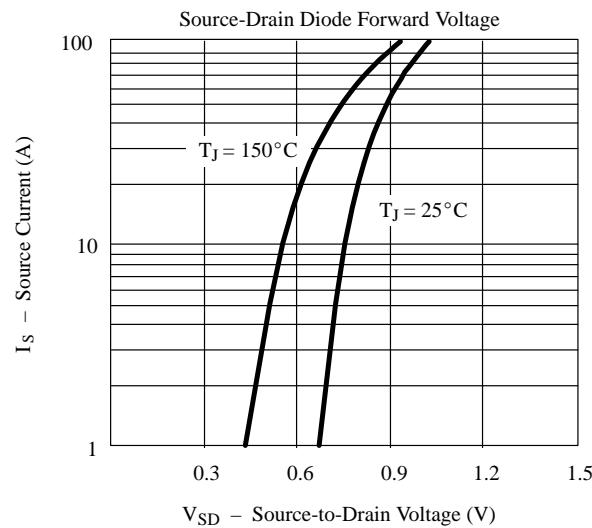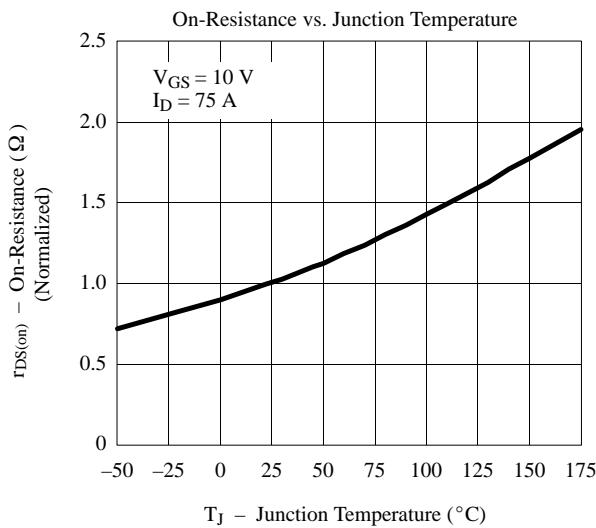

Thermal Ratings

