


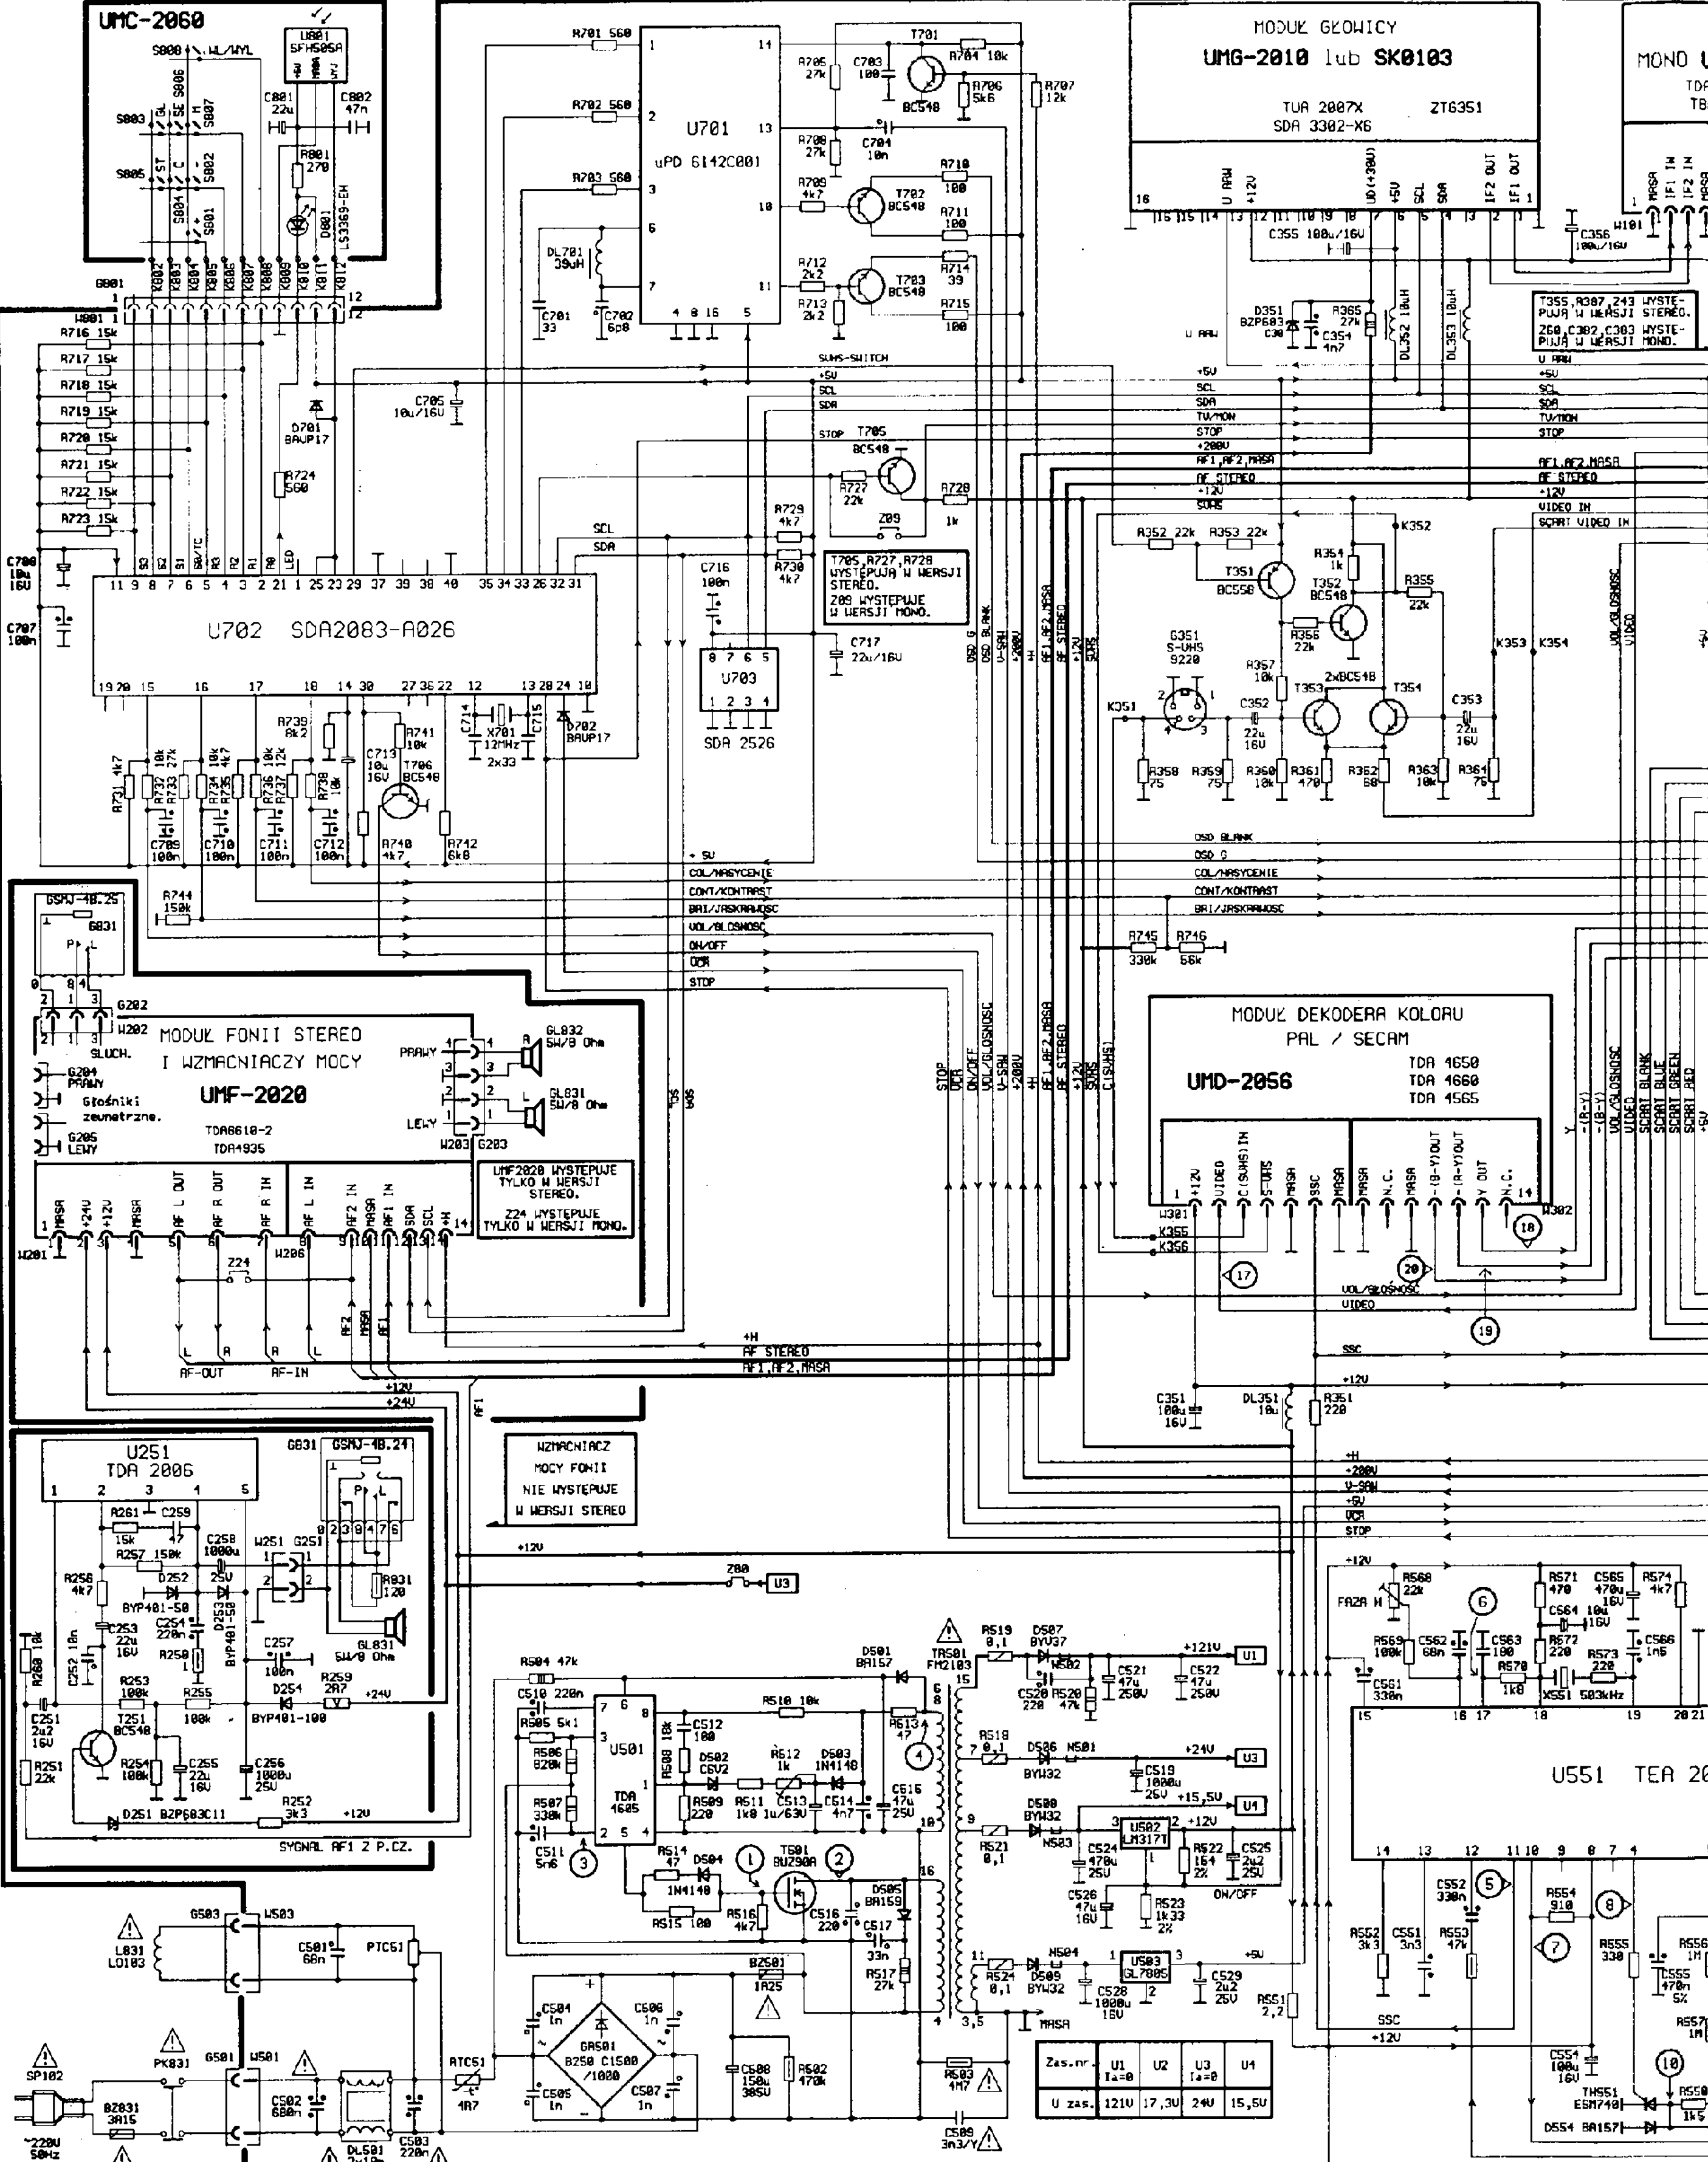

OZNACZENIE REZYSTORÓW I KONDENSATORÓW

0.25u	3M	25u	350V
0.5u	4M	16u	400V
0.75u	5M	63u	500V
1u	7M	100u	630V
1.5u	8M	150u	1000V
2u	10M	250u	1500V

ZESPÓŁ DOCHŁADZAJĄCY

KIERUNEK NUMERACJI WYPROWADZEŃ UKŁADÓW SCALONYCH

Zas.nr	U1	U2	U3	U4
U zas.	121V	17,30V	24V	15,5V

UML-2060

UML-2010

UML-2056

UML-202

UML-203

UML-204

UML-205

UML-206

UML-207

UML-208

UML-209

UML-210

UML-211

UML-212

UML-213

UML-214

UML-215

UML-216

UML-217

UML-218

UML-219

UML-220

UML-221

UML-222

UML-223

UML-224

UML-225

UML-226

UML-227

UML-228

UML-229

UML-230

UML-231

UML-232

UML-233

UML-234

UML-235

UML-236

UML-237

UML-238

UML-239

UML-240

UML-241

UML-242

UML-243

UML-244

UML-245

UML-246

UML-247

UML-248

UML-249

UML-250

UML-251

UML-252

UML-253

UML-254

UML-255

UML-256

UML-257

UML-258

UML-259

UML-260

UML-261

UML-262

UML-263

UML-264

UML-265

UML-266

UML-267

UML-268

UML-269

UML-270

UML-271

UML-272

UML-273

UML-274

UML-275

UML-276

UML-277

UML-278

UML-279

UML-280

UML-281

UML-282

UML-283

UML-284

UML-285

UML-286

UML-287

UML-288

UML-289

UML-290

UML-291

UML-292

UML-293

UML-294

UML-295

UML-296

UML-297

UML-298

UML-299

UML-300


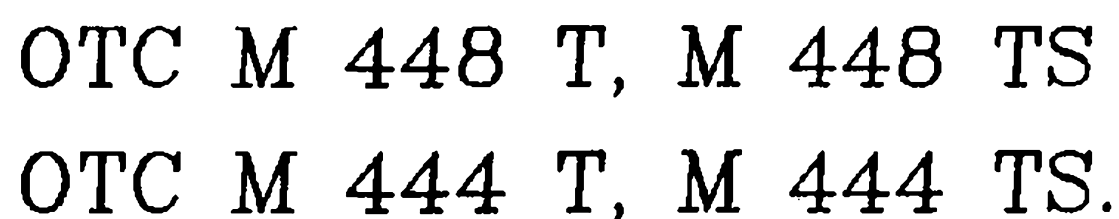






Figure 1 displays 23 waveforms for a 1000-line color TV system. The waveforms are organized as follows:

- ① ON**: Shows a pulse with a peak of $+18,8U$ and a duration of $28\mu s$.
- ② ON**: Shows a pulse with a peak of $+140U$ and a duration of $28\mu s$.
- ③ ON**: Shows two pulses with peaks of $+2U$ and $+1U$ and a duration of $28\mu s$.
- ④ ON**: Shows a pulse with a peak of $+15U$ and a duration of $28\mu s$.
- ⑤ H**: Shows a horizontal sync pulse with a peak of $+18U$ and a duration of $1,5U$.
- ⑥ Upp=+3,5U**: Shows a sawtooth wave with a peak of $+18,5U$ and a period of $T=2\mu s$.
- ⑦**: Shows a pulse with a peak of $+2,5U$ and a duration of $36\mu s$.
- ⑧ H**: Shows a horizontal sync pulse with a peak of $+10,5U$.
- ⑨ U**: Shows a sawtooth wave with a peak of $+5,4U$ and a duration of $+1,2U$.
- ⑩ U**: Shows a pulse with a peak of $+11U$ and a duration of $+68U$.
- ⑪ U**: Shows a pulse with a peak of $+19U$ and a duration of $+15U$.
- ⑫ H**: Shows a horizontal sync pulse with a peak of $+27U$ and a duration of $38\mu s$.
- ⑬ H**: Shows a horizontal sync pulse with a peak of $+1U$ and a duration of $-10,5U$.
- ⑭ H**: Shows a horizontal sync pulse with a peak of $+570U$.
- ⑮ H**: Shows a horizontal sync pulse with a peak of $+20U$ and a duration of $-140U$.
- ⑯ U**: Shows a pulse with a peak of $+84U$ and a duration of $+33U$.
- ⑰ CHROMA-OFF**: Shows a sawtooth wave with a peak of $2,1U$.
- ⑱ Y**: Shows a sawtooth wave with a peak of $8,4U$.
- ⑲ -(A-Y)**: Shows a pulse with a peak of $1,05U$.
- ⑳ -(B-Y)**: Shows a pulse with a peak of $1,35U$.
- ㉑ R**: Shows a pulse with a peak of $3U$.
- ㉒ G**: Shows a pulse with a peak of $3U$.
- ㉓ B**: Shows a pulse with a peak of $3U$.

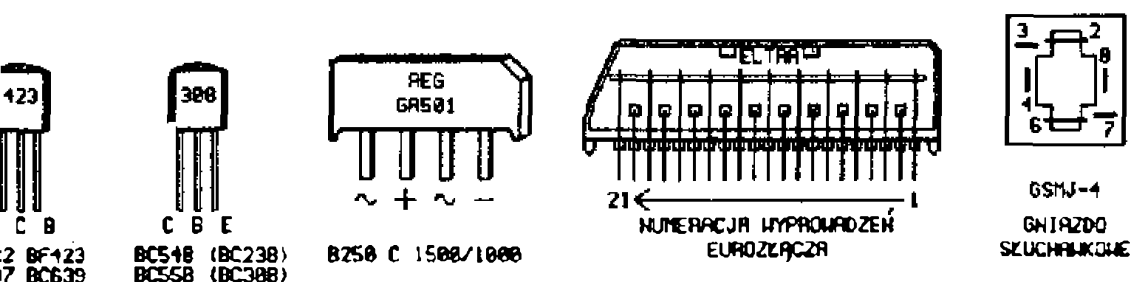

Elementów oznaczonych symbolem z uwagi na bezpieczeństwo użytkownika nie wolno wymieniać na elementy innych typów. Do wymiany należy używać wyłącznie części oryginalnych, opisanych w wykazie elementów decydujących o bezpieczeństwie użytkownika.

W związku ze stałą modyfikacją konstrukcji odbiorników prowadzoną na bieżąco, producent zastrzega sobie prawo do dokonywania zmian w urządzeniach bez uprzedzenia.

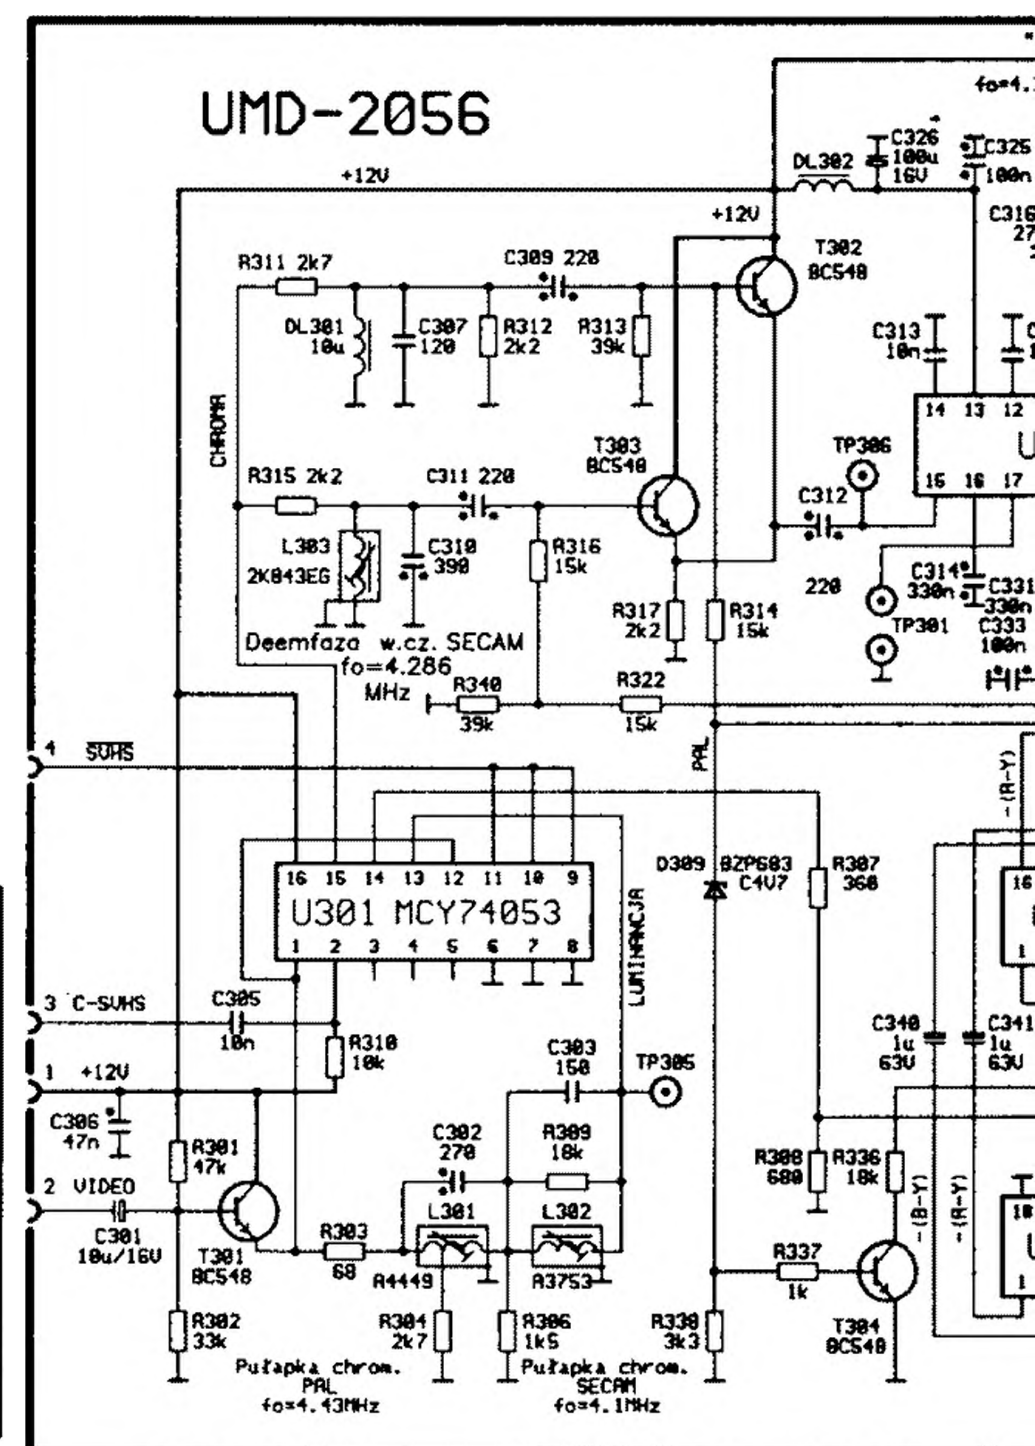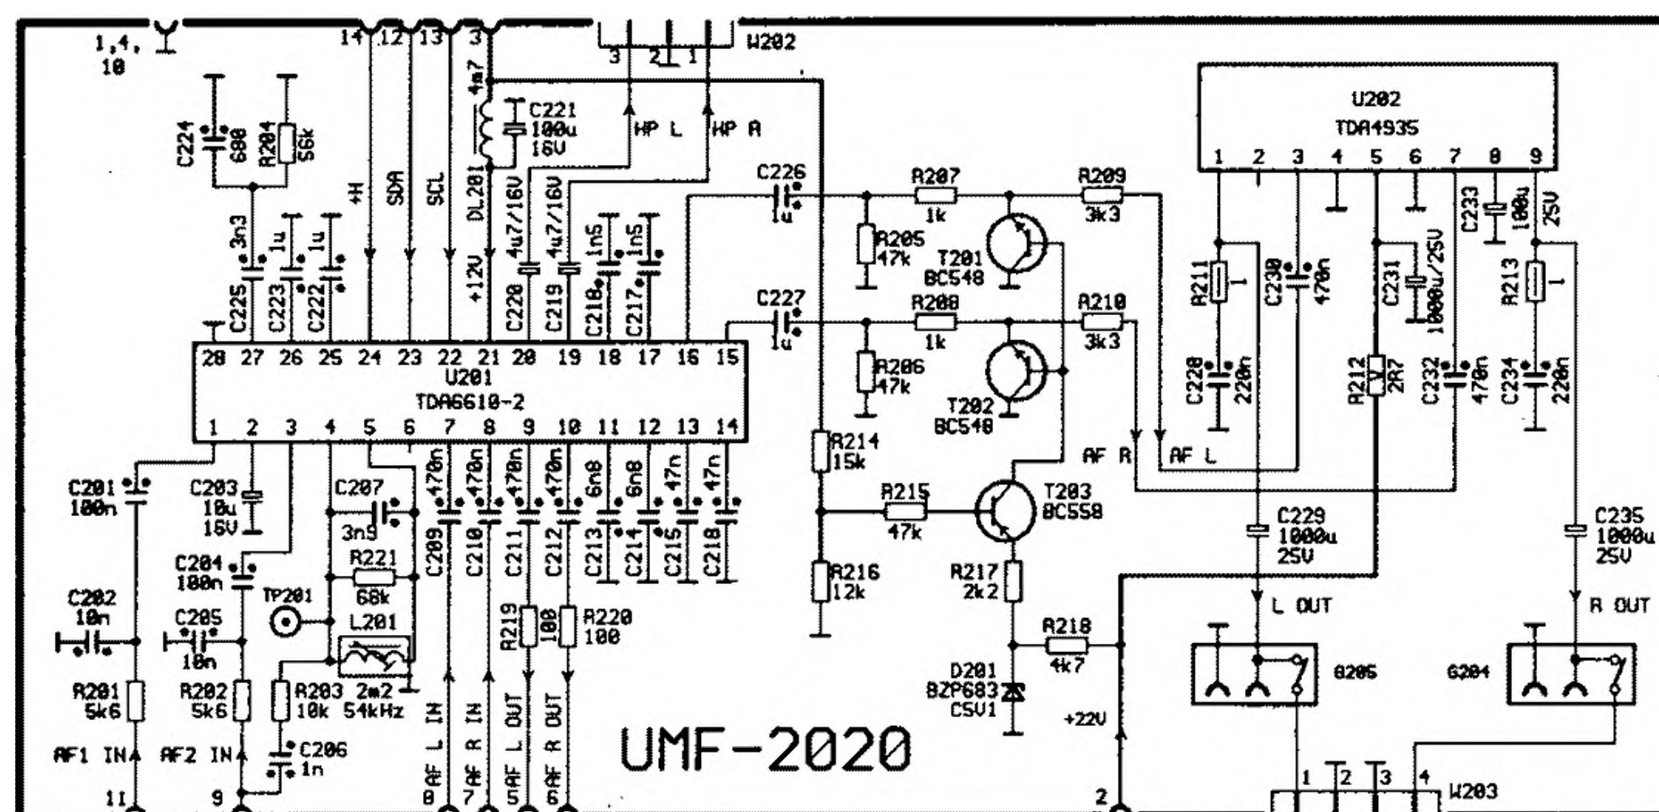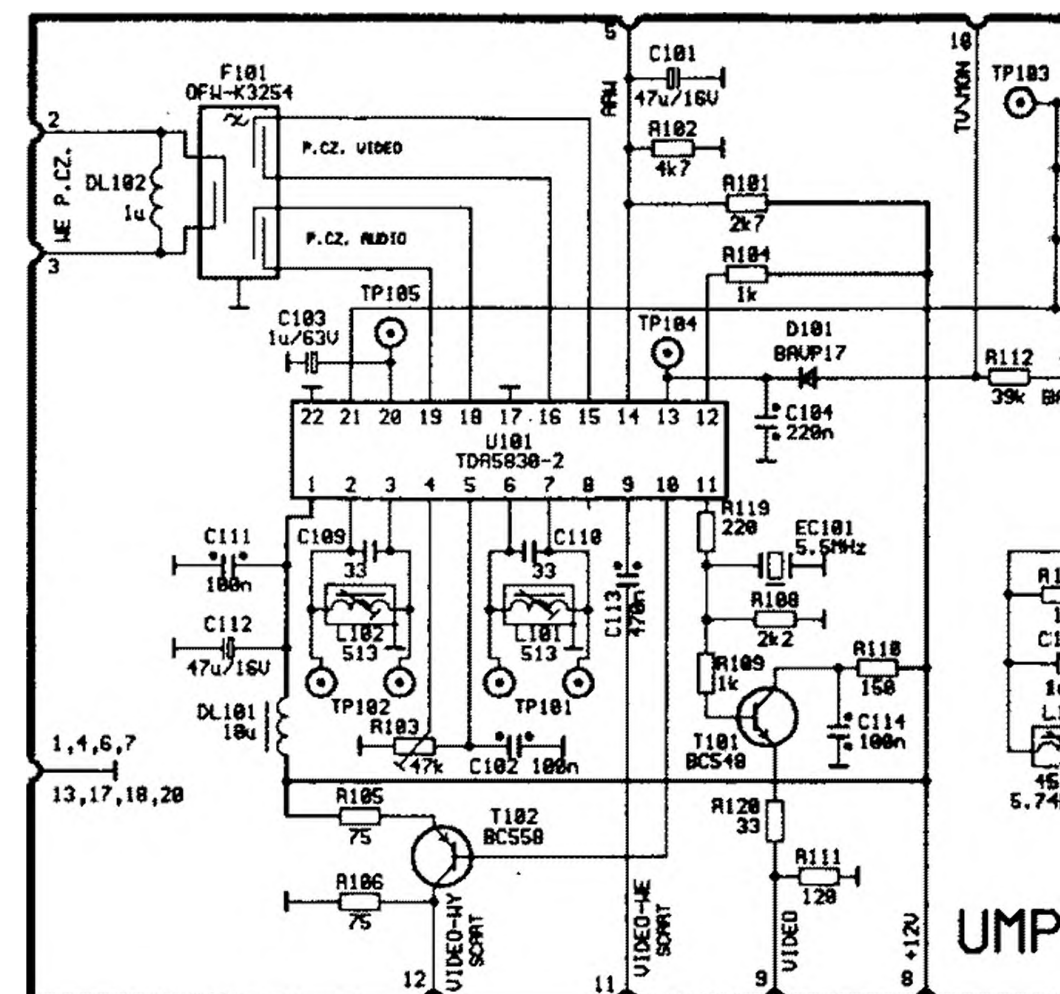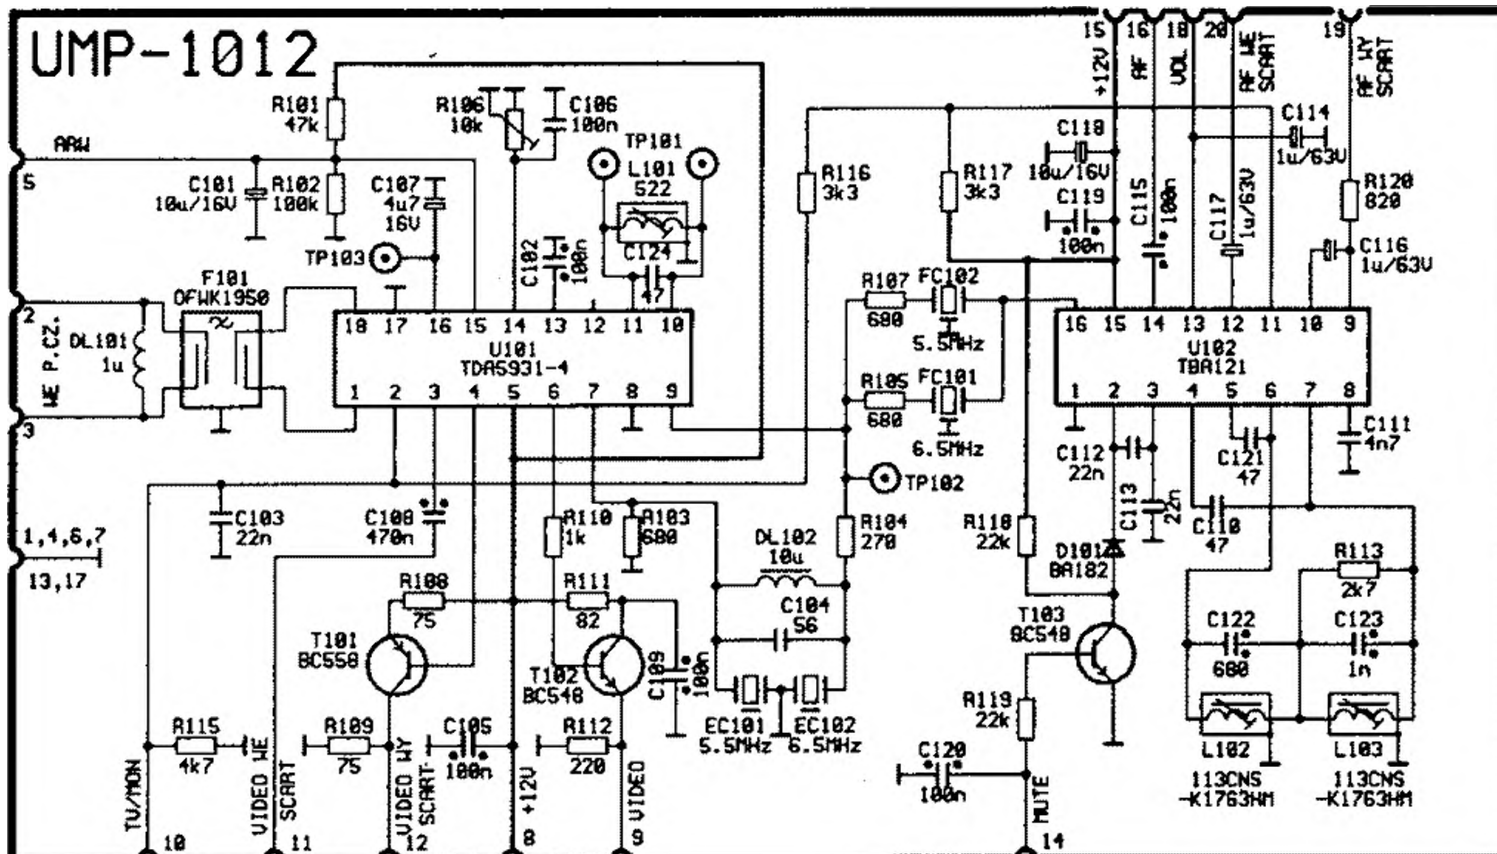

OSTRZEŻENIE :

Elementów oznaczonych symbolem  z uwagi na bezpieczeństwo użytkownika nie wolno wymieniać na elementy innych typów. Do wymiany należy używać wyłącznie części oryginalnych, opisanych w wykazie elementów decydujących o bezpieczeństwie użytkownika.

UWAGA :

1. Moduł UMC-2034 występuje tylko w OTC M444T, M444TS.
2. W związku ze stałą modyfikacją konstrukcji odbiorników prowadzoną na bieżąco, producent zastrzega sobie prawo do dokonywania zmian w urządzeniach bez uprzedzenia.

OZNACZENIE REZYSTORÓW I KONDENSATORÓW

	0.25W		2W		25V		350V
	0.35W		3W		16V		100V
	0.5W		4W		63V		500V
	0.75W		5W		100V		630V
	1W		7W		160V		1000V
	1.5W		8W		250V		1600V

UMC-2034

