
#### 1.5 AMP POSITIVE STEP-DOWN **INTEGRATED SWITCHING REGULATOR**

#### Revised 6/30/98




- Very Small Footprint
- High Efficiency > 85%
- Self-Contained Inductor
- Internal Short-Circuit Protection
- Over-Temperature Protection
- Wide Input Range

The 78SR100 is a series of wide input voltage, 3-terminal Integrated Switching Regulators (ISRs). These ISRs have a maximum output current of 1.5A and an output voltage that is laser trimmed to a variety of industry standard voltages.

These 78 series regulators have excellent line and load regulation with internal shortcircuit and over-temperature protection, are very flexible, and may be used in a wide variety of applications.


# **Standard Application**



C2 = Optional 1µF ceramic

## **Pin-Out Information**

Pin	Function
1	$V_{in}$
2	GND
3	$V_{out}$



SUGGESTED BOARD LAYOUT COMPONENT SIDE VIEW Pkg Style 500

**Ordering Information** 

78SR1	 	C
tnut Voltage	Pack	age Suff

**05** = 5.0 Volts

**53** = 5.25 Volts **06** = 6.0 Volts

**74** = 7.15 Volts

**08** = 8.0 Volts

**09** = 9.0 Volts **10** = 10.0 Volts

**12** = 12.0 Volts

**14** = 13.9 Volts **15** = 15.0 Volts

V = Vertical Mount

**S** = Surface Mount **H** = Horizontal Mount


#### **Specifications**

Characteristics			78SR10			
(T <sub>a</sub> = 25°C unless noted)	Symbols	Conditions	Min	Тур	Max	Units
Output Current	$I_{o}$	Over V <sub>in</sub> range	0.1*	_	1.5	A
Short Circuit Current	$I_{sc}$	$V_{in} = V_{in} \min$	_	3.5	_	Apk
Input Voltage Range	$V_{in}$	$0.1 \le I_o \le 1.5A$ $V_o = 5V$ $V_o = 12V$	7 14.5	=	30 30	V V
Output Voltage Tolerance	$\Delta V_{ m o}$	Over $V_{in}$ range, $I_o$ =1.5A $T_a$ = 0°C to +60°C	_	±1.0	±2.0	%V <sub>o</sub>
Line Regulation	Reg <sub>line</sub>	Over V <sub>in</sub> range	_	±0.2	±0.4	%Vo
Load Regulation	Reg <sub>load</sub>	$0.1 \le I_o \le 1.5A$	_	±0.1	±0.2	%Vo
V <sub>o</sub> Ripple/Noise	$V_n$	$V_{in} = 9V, I_o = 1.5A$ $V_o = 5V$ $V_{in} = 16V, I_o = 1.5A$ $V_o = 12V$	_	50 80	_	$\mathrm{mV}_{\mathrm{pp}}$ $\mathrm{mV}_{\mathrm{pp}}$
Transient Response	t <sub>tr</sub>	50% load change V <sub>o</sub> over/undershoot	_	100 30	_	μSec %Vo
Efficiency	η	$V_{in}$ = 10V, $I_{o}$ = 1A $V_{o}$ = 5V $V_{in}$ = 17V, $I_{o}$ = 1A $V_{o}$ = 12V	_	85 90	_	% %
Switching Frequency	$f_{\mathrm{o}}$	Over V <sub>in</sub> range, I <sub>o</sub> =1.5A	600	650	700	kHz
Absolute Maximum Operating Temperature Range	$T_a$	_	-40	_	+85	°C
Recommended Operating Temperature Range	$T_a$	Free Air Convection, (40-60LFM) At V <sub>in</sub> = 24V, I <sub>o</sub> =1.0A	-40	_	+80**	°C
Thermal Resistance	$\theta_{\mathrm{ja}}$	Free Air Convection, (40-60LFM)	_	45	_	°C/W
Storage Temperature	$T_s$	_	-40		+125	°C
Mechanical Shock	_	Per Mil-STD-883D, Method 2002.3	_	500	_	G's
Mechanical Vibration	_	Per Mil-STD-883D, Method 2007.2, 20-2000 Hz, soldered in a PC board	_	5	_	G's
Weight		_	_	6.5	_	grams

<sup>\*</sup>ISR will operate down to no load with reduced specifications.

<sup>\*\*</sup>See Thermal Derating chart.

#### CHARACTERISTIC DATA

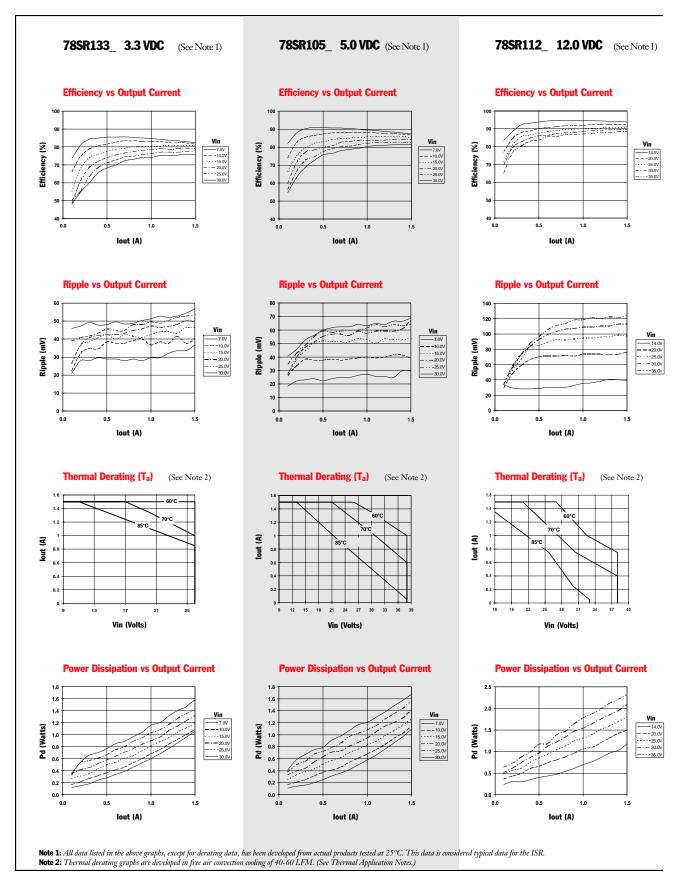

12-Jan-2013

### **PACKAGING INFORMATION**

Orderable Device	Status P	Package Type	Package Drawing	Pins	Package Qty	Eco Plan	Lead/Ball Finish	MSL Peak Temp	Samples (Requires Login
78SR105HC	LIFEBUY	SIP MODULE	EFA	3	25	Pb-Free (RoHS)	Call TI	N / A for Pkg Type	
78SR105SC	LIFEBUY	SIP MODULE	EFC	3	25	Pb-Free (RoHS)	Call TI	Level-1-215C-UNLIM	
78SR105SCT	OBSOLETE S	SIP MODULE	EFC	3		TBD	Call TI	Call TI	
78SR105TC	LIFEBUY	SIP MODULE	EFT	3	25	Pb-Free (RoHS)	Call TI	N / A for Pkg Type	
78SR105VC	LIFEBUY	SIP MODULE	EFD	3	25	Pb-Free (RoHS)	Call TI	N / A for Pkg Type	
78SR106HC	LIFEBUY	SIP MODULE	EFA	3	25	Pb-Free (RoHS)	Call TI	N / A for Pkg Type	
78SR106SC	LIFEBUY	SIP MODULE	EFC	3	25	Pb-Free (RoHS)	Call TI	Level-1-215C-UNLIM	
78SR106SCT	OBSOLETE S	SIP MODULE	EFC	3		TBD	Call TI	Call TI	
78SR106VC	LIFEBUY	SIP MODULE	EFD	3	25	Pb-Free (RoHS)	Call TI	N / A for Pkg Type	
78SR108HC	LIFEBUY	SIP MODULE	EFA	3	25	Pb-Free (RoHS)	Call TI	N / A for Pkg Type	
78SR108SC	LIFEBUY	SIP MODULE	EFC	3	25	Pb-Free (RoHS)	Call TI	Level-1-215C-UNLIM	
78SR108SCT	OBSOLETE S	SIP MODULE	EFC	3		TBD	Call TI	Call TI	
78SR108VC	LIFEBUY	SIP MODULE	EFD	3	25	Pb-Free (RoHS)	Call TI	N / A for Pkg Type	
78SR109HC	LIFEBUY	SIP MODULE	EFA	3	25	Pb-Free (RoHS)	Call TI	N / A for Pkg Type	
78SR109SC	OBSOLETE S	SIP MODULE	EFC	3		TBD	Call TI	Call TI	
78SR109SCT	OBSOLETE S	SIP MODULE	EFC	3		TBD	Call TI	Call TI	
78SR109VC	LIFEBUY	SIP MODULE	EFD	3	25	Pb-Free (RoHS)	Call TI	N / A for Pkg Type	
78SR110HC	LIFEBUY	SIP MODULE	EFA	3	25	Pb-Free (RoHS)	Call TI	N / A for Pkg Type	
78SR110SC	OBSOLETE S	SIP MODULE	EFC	3		TBD	Call TI	Call TI	
78SR110SCT	OBSOLETE S	SIP MODULE	EFC	3		TBD	Call TI	Call TI	



12-Jan-2013

Orderable Device	Status	Package Type	Package Drawing	Pins	Package Qty	Eco Plan	Lead/Ball Finish	MSL Peak Temp	Samples (Requires Login)
78SR110VC	OBSOLETE	SIP MODULE	EFD	3		TBD	Call TI	Call TI	
78SR112HC	LIFEBUY	SIP MODULE	EFA	3	25	Pb-Free (RoHS)	Call TI	N / A for Pkg Type	
78SR112SC	LIFEBUY	SIP MODULE	EFC	3	25	Pb-Free (RoHS)	Call TI	Level-1-215C-UNLIM	
78SR112SCT	OBSOLETE	SIP MODULE	EFC	3		TBD	Call TI	Call TI	
78SR112TC	LIFEBUY	SIP MODULE	EFT	3	25	Pb-Free (RoHS)	Call TI	N / A for Pkg Type	
78SR112VC	LIFEBUY	SIP MODULE	EFD	3	25	Pb-Free (RoHS)	Call TI	N / A for Pkg Type	
78SR114HC	LIFEBUY	SIP MODULE	EFA	3	25	Pb-Free (RoHS)	Call TI	N / A for Pkg Type	
78SR114SC	OBSOLETE	SIP MODULE	EFC	3		TBD	Call TI	Call TI	
78SR114SCT	OBSOLETE	SIP MODULE	EFC	3		TBD	Call TI	Call TI	
78SR114VC	LIFEBUY	SIP MODULE	EFD	3	25	Pb-Free (RoHS)	Call TI	N / A for Pkg Type	
78SR114WC	OBSOLETE	SIP MODULE	EFW	3		TBD	Call TI	Call TI	
78SR115HC	LIFEBUY	SIP MODULE	EFA	3	25	Pb-Free (RoHS)	Call TI	N / A for Pkg Type	
78SR115SC	OBSOLETE	SIP MODULE	EFC	3		TBD	Call TI	Call TI	
78SR115SCT	OBSOLETE	SIP MODULE	EFC	3		TBD	Call TI	Call TI	
78SR115VC	LIFEBUY	SIP MODULE	EFD	3	25	Pb-Free (RoHS)	Call TI	N / A for Pkg Type	
78SR153HC	LIFEBUY	SIP MODULE	EFA	3	25	Pb-Free (RoHS)	Call TI	N / A for Pkg Type	
78SR153SC	LIFEBUY	SIP MODULE	EFC	3	25	Pb-Free (RoHS)	Call TI	Level-1-215C-UNLIM	
78SR153SCT	OBSOLETE	SIP MODULE	EFC	3		TBD	Call TI	Call TI	
78SR153TC	OBSOLETE	SIP MODULE	EFT	3		TBD	Call TI	Call TI	
78SR153VC	LIFEBUY	SIP MODULE	EFD	3	25	Pb-Free (RoHS)	Call TI	N / A for Pkg Type	
78SR174HC	LIFEBUY	SIP MODULE	EFA	3	25	Pb-Free (RoHS)	Call TI	N / A for Pkg Type	
78SR174SC	LIFEBUY	SIP MODULE	EFC	3	25	Pb-Free (RoHS)	Call TI	Level-1-215C-UNLIM	





12-Jan-2013

Orderable Device	Status	Package Type	_	Pins	Package Qty	Eco Plan	Lead/Ball Finish	MSL Peak Temp	Samples
	(1)		Drawing			(2)		(3)	(Requires Login)
78SR174SCT	OBSOLETE	SIP MODULE	EFC	3		TBD	Call TI	Call TI	
78SR174VC	LIFEBUY	SIP MODULE	EFD	3	25	Pb-Free (RoHS)	Call TI	N / A for Pkg Type	

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

#### IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have *not* been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products Applications

Audio www.ti.com/audio Automotive and Transportation www.ti.com/automotive Communications and Telecom **Amplifiers** amplifier.ti.com www.ti.com/communications **Data Converters** dataconverter.ti.com Computers and Peripherals www.ti.com/computers **DLP® Products** www.dlp.com Consumer Electronics www.ti.com/consumer-apps

DSP **Energy and Lighting** dsp.ti.com www.ti.com/energy Clocks and Timers www.ti.com/clocks Industrial www.ti.com/industrial Interface interface.ti.com Medical www.ti.com/medical logic.ti.com Logic Security www.ti.com/security

Power Mgmt power.ti.com Space, Avionics and Defense www.ti.com/space-avionics-defense

Microcontrollers <u>microcontroller.ti.com</u> Video and Imaging <u>www.ti.com/video</u>

RFID www.ti-rfid.com

OMAP Applications Processors <a href="www.ti.com/omap">www.ti.com/omap</a> TI E2E Community <a href="e2e.ti.com">e2e.ti.com</a>

Wireless Connectivity <u>www.ti.com/wirelessconnectivity</u>