CD4029BC,CD4029BM

CD4029BM/CD4029BC Presettable Binary/Decade Up/Down Counter



Literature Number: SNOS395A

CD4029BM/CD4029BC Presettable Binary/Decade Up/Down Counter

General Description

The CD4029BM/CD4029BC is a presettable up/down counter which counts in either binary or decade mode depending on the voltage level applied at binary/decade input. When binary/decade is at logical "1", the counter counts in binary, otherwise it counts in decade. Similarly, the counter counts up when the up/down input is at logical "1" and vice versa

A logical "1" preset enable signal allows information at the "jam" inputs to preset the counter to any state asynchronously with the clock. The counter is advanced one count at the positive-going edge of the clock if the carry in and preset enable inputs are at logical "0". Advancement is inhibited when either or both of these two inputs is at logical "1". The carry out signal is normally at logical "1" state and goes to logical "0" state when the counter reaches its maximum


count in the "up" mode or the minimum count in the "down" mode provided the carry input is at logical "0" state.

All inputs are protected against static discharge by diode clamps to both $V_{\mbox{\scriptsize DD}}$ and $V_{\mbox{\scriptsize SS}}.$

Features

- Wide supply voltage range
- High noise immunity
- 3V to 15V 0.45 V_{DD} (typ.)
- Low power

 TTL compatibility
- fan out of 2 driving 74L or 1 driving 74LS
- Parallel jam inputs
- Binary or BCD decade up/down counting

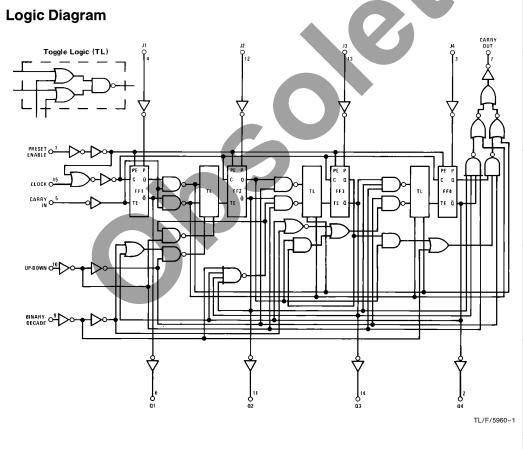

Absolute Maximum Ratings

(Notes 1 and 2)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

DC Supply Voltage (V_{DD}) $-0.5V \text{ to } +18 \text{ V}_{DC}$ Input Voltage (V_{IN}) $-0.5V \text{ to V}_{DD} + 0.5 \text{ V}_{DC}$ Storage Temperature Range (T_S) $-65^{\circ}\text{C to } +150^{\circ}\text{C}$

Power Dissipation (P_D)

Dual-In-Line 700 mW Small Outline 500 mW

Lead Temperature (T_L)

(Soldering, 10 seconds) 260°C

Recommended Operating Conditions (Note 2)

DC Supply Voltage (V_{DD}) 3V to 15 V_{DC} Input Voltage (V_{IN}) 0V to V_{DD} V_{DC}

Operating Temperature Range (T_A) CD4029BM

DC Electrical Characteristics CD4029BM (Note 2)

Symbol	Parameter	Conditions	−55°C		+ 25°C			+ 125°C		Units
Symbol	raiametei	Conditions	Min	Max	Min	Тур	Max	Min	Max	Units
I _{DD}	Quiescent Device Current	$V_{DD} = 5V$ $V_{DD} = 10V$ $V_{DD} = 15V$		5 10 20			5 10 20	5	150 300 600	μΑ μΑ μΑ
V _{OL}	Low Level Output Voltage	$\begin{aligned} & I_{O} < 1 \; \mu A \\ &V_{DD} = 5 V \\ &V_{DD} = 10 V \\ &V_{DD} = 15 V \end{aligned}$		0.05 0.05 0.05		0 0 0	0.05 0.05 0.05	Y	0.05 0.05 0.05	>
V _{OH}	High Level Output Voltage	$\begin{array}{l} I_O < 1 \; \mu A \\ V_{DD} = 5 V \\ V_{DD} = 10 V \\ V_{DD} = 15 V \end{array}$	4.95 9.95 14.95		4.95 9.95 14.95	5 10 15		4.95 9.95 14.95		V V V
V _{IL}	Low Level Input Voltage	$V_{DD} = 5V, V_O = 0.5V \text{ or } 4.5V \ V_{DD} = 10V, V_O = 1V \text{ or } 9V \ V_{DD} = 15V, V_O = 1.5V \text{ or } 13.5V$		1.5 3.0 4.0			1.5 3.0 4.0		1.5 3.0 4.0	V V
V _{IH}	High Level Input Voltage	$V_{DD} = 5V, V_{O} = 0.5V \text{ or } 4.5V$ $V_{DD} = 10V, V_{O} = 1V \text{ or } 9V$ $V_{DD} = 15V, V_{O} = 1.5V \text{ or } 13.5V$	3.5 7.0 11.0		3.5 7.0 11.0			3.5 7.0 11.0		V V
I _{OL}	Low Level Output Current (Note 3)	$V_{DD} = 5V, V_{O} = 0.4V$ $V_{DD} = 10V, V_{O} = 0.5V$ $V_{DD} = 15V, V_{O} = 1.5V$	0.64 1.6 4.2		0.51 1.3 3.4	0.88 2.25 8.8		0.36 0.9 2.4		mA mA mA
ГОН	High Level Output Current (Note 3)	$V_{DD} = 5V, V_{O} = 4.6V$ $V_{DD} = 10V, V_{O} = 9.5V$ $V_{DD} = 15V, V_{O} = 13.5V$	-0.64 -1.6 -4.2		-0.51 -1.3 -3.4	-0.88 -2.25 -8.8		-0.36 -0.9 -2.4		mA mA mA
I _{IN}	Input Current	$V_{DD} = 15V, V_{IN} = 0V$ $V_{DD} = 15V, V_{IN} = 15V$		-0.1 0.1		-10 ⁻⁵	-0.1 0.1		-1.0 1.0	μA μA

DC Electrical Characteristics CD4029BC (Note 2)

Symbol	Parameter	Conditions	−40°C		+ 25°C			+ 85°C		Units
Cymbol	Tarameter		Min	Max	Min	Тур	Max	Min	Max	Oille
I _{DD}	Quiescent Device Current	$V_{DD} = 5V$ $V_{DD} = 10V$ $V_{DD} = 15V$		20 40 80			20 40 80		150 300 600	μΑ μΑ μΑ
V _{OL}	Low Level Output Voltage	$ I_{O} < 1 \mu A$ $V_{DD} = 5V$ $V_{DD} = 10V$ $V_{DD} = 15V$		0.05 0.05 0.05		0 0	0.05 0.05 0.05		0.05 0.05 0.05	V V
V _{OH}	High Level Output Voltage	$\begin{aligned} & \left I_O \right < 1 \; \mu A \\ & V_{DD} = 5 V \\ & V_{DD} = 10 V \\ & V_{DD} = 15 V \end{aligned}$	4.95 9.95 14.95		4.95 9.95 14.95	5 10 15		4.95 9.95 14.95		V V V

Note 1: "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. Except for "Operating Temperature Range" they are not meant to imply that the devices should be operated at these limits. The table of "Electrical Characteristics" provides conditions for actual device operation.

Note 2: $V_{SS} = 0V$ unless otherwise specified.

Note 3: I_{OH} and I_{OL} are tested one output at a time.

DC Electrical Characteristics CD4029BC (Note 2) (Continued)

Symbol	Parameter	Conditions	−40°C		+ 25°C			+ 85°C		Units
Symbol	raiametei	Conditions	Min	Max	Min	Тур	Max	Min	Max	Ointo
V _{IL}	Low Level Input Voltage	$V_{DD} = 5V$, $V_{O} = 0.5V$ or 4.5V $V_{DD} = 10V$, $V_{O} = 1V$ or 9V $V_{DD} = 15V$, $V_{O} = 1.5V$ or 13.5V		1.5 3.0 4.0			1.5 3.0 4.0		1.5 3.0 4.0	V V V
V _{IH}	High Level Input Voltage	$V_{DD} = 5V$, $V_{O} = 0.5V$ or 4.5V $V_{DD} = 10V$, $V_{O} = 1V$ or 9V $V_{DD} = 15V$, $V_{O} = 1.5V$ or 13.5V	3.5 7.0 11.0		3.5 7.0 11.0			3.5 7.0 11.0		V V
I _{OL}	Low Level Output Current (Note 3)	$V_{DD} = 5V, V_{O} = 0.4V$ $V_{DD} = 10V, V_{O} = 0.5V$ $V_{DD} = 15V, V_{O} = 1.5V$	0.52 1.3 3.6		0.44 1.1 3.0	0.88 2.25 8.8		0.36 0.9 2.4		mA mA mA
I _{OH}	High Level Output Current (Note 3)	$V_{DD} = 5V, V_{O} = 4.6V$ $V_{DD} = 10V, V_{O} = 9.5V$ $V_{DD} = 15V, V_{O} = 13.5V$	-0.52 -1.3 -3.6		-0.44 -1.1 -3.0	-0.88 -2.25 -8.8		-0.36 -0.9 -2.4		mA mA mA
I _{IN}	Input Current	$V_{DD} = 15V, V_{IN} = 0V$ $V_{DD} = 15V, V_{IN} = 15V$		-0.3 0.3		-10 ⁻⁵	-0.3 0.3		-1.0 1.0	μ Α μ Α

AC Electrical Characteristics*

 $T_A = 25^{\circ}$ C, $C_L = 50$ pF, $R_L = 200$ k, Input $t_{rCL} = t_{fCL} = 20$ ns, unless otherwise specified

Symbol	Parameter	Conditions	Min	Тур	Max	Units
CLOCKED OP	ERATION			4		
t _{PHL} or t _{PLH}	Propagation Delay Time to Q Outputs	$V_{DD} = 5V$ $V_{DD} = 10V$ $V_{DD} = 15V$		200 85 70	400 170 140	ns ns ns
t _{PHL} or t _{PLH}	Propagation Delay Time to Carry Output	$V_{DD} = 5V$ $V_{DD} = 10V$ $V_{DD} = 15V$		320 135 110	640 270 220	ns ns ns
t _{PHL} or t _{PLH}	Propagation Delay Time to Carry Output	$C_L = 15 \text{ pF}$ $V_{DD} = 5V$ $V_{DD} = 10V$ $V_{DD} = 15V$		285 120 95	570 240 190	ns ns ns
t _{THL} or t _{TLH}	Transition Time/Q or Carry Output	$V_{DD} = 5V$ $V_{DD} = 10V$ $V_{DD} = 15V$		100 50 40	200 100 80	ns ns ns
t _{WH} or t _{WL}	Minimum Clock Pulse Width	$V_{DD} = 5V$ $V_{DD} = 10V$ $V_{DD} = 15V$		160 70 55	320 135 110	ns ns ns
t _{rCL} or t _{fCL}	Maximum Clock Rise and Fall Time	$V_{DD} = 5V$ $V_{DD} = 10V$ $V_{DD} = 15V$	15 10 5			μs μs μs
tsu	Minimum Set-Up Time	$V_{DD} = 5V$ $V_{DD} = 10V$ $V_{DD} = 15V$		180 70 55	360 140 110	ns ns ns
f _{CL}	Maximum Clock Frequency	$V_{DD} = 5V$ $V_{DD} = 10V$ $V_{DD} = 15V$	1.5 3.7 4.5	3.1 7.4 9		MHz MHz MHz
C _{IN}	Average Input Capacitance	Any Input		5	7.5	pF
C_{PD}	Power Dissipation Capacitance	Per Package (Note 4)		65		pF

Note 1: "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. Except for "Operating Temperature Range" they are not meant to imply that the devices should be operated at these limits. The table of "Electrical Characteristics" provides conditions for actual device operation.

Note 2: $V_{SS} = 0V$ unless otherwise specified.

Note 3: \mathbf{I}_{OH} and \mathbf{I}_{OL} are tested one output at a time.

AC Electrical Characteristics*

 T_A = 25°C, C_L = 50 pF, R_L = 200 k, Input t_{rCL} = t_{fCL} = 20 ns, unless otherwise specified (Continued)

Symbol	Parameter	Conditions	Min	Тур	Max	Units
PRESET ENABL	LE OPERATION					
t _{PHL} or t _{PLH}	Propagation Delay Time	$V_{DD} = 5V$		285	570	ns
	to Q output	$V_{DD} = 10V$		115	230	ns
		$V_{DD} = 15V$		95	195	ns
t _{PHL} or t _{PLH}	Propagation Delay Time	$V_{DD} = 5V$		400	800	ns
	to Carry Output	$V_{DD} = 10V$		165	330	ns
		$V_{DD} = 15V$		135	260	ns
t _{WH}	Minimum Preset Enable	$V_{DD} = 5V$		80	160	ns
	Pulse Width	$V_{DD} = 10V$		30	60	ns
		$V_{DD} = 15V$		25	50	ns
t _{REM}	Minimum Preset Enable	$V_{DD} = 5V$		150	300	ns
	Removal Time	$V_{DD} = 10V$		60	120	ns
		$V_{DD} = 15V$		50	100	ns
CARRY INPUT	OPERATION					
t _{PHL} or t _{PLH}	Propagation Delay Time	$V_{DD} = 5V$		265	530	ns
	to Carry Output	$V_{DD} = 10V$		110	220	ns
		$V_{DD} = 15V$		90	180	ns
t _{PHL} , t _{PLH}	Propagation Delay Time	C _L = 15 pF				
	to Carry Output	$V_{DD} = 5V$		200	400	ns
		$V_{DD} = 10V$		85	170	ns
		V _{DD} = 15V		70	140	ns

^{*}AC Parameters are guaranteed by DC correlated testing.


Note 1: "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. Except for "Operating Temperature Range" they are not meant to imply that the devices should be operated at these limits. The table of "Electrical Characteristics" provides conditions for actual device operation.

Note 2: $V_{SS} = 0V$ unless otherwise specified.

Note 3: I_{OH} and I_{OL} are tested one output at a time.

Note 4: C_{PD} determines the no load AC power consumption of any CMOS device. For complete explanation, see 54C/74C Family Characteristics application note, AN-90.


Connection Diagram




Top View

TL/F/5960-2

Order Number CD4029B

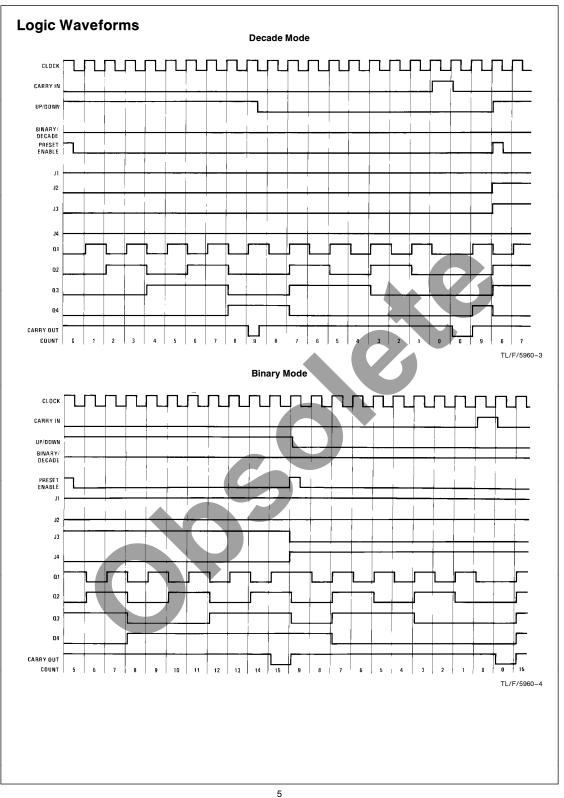

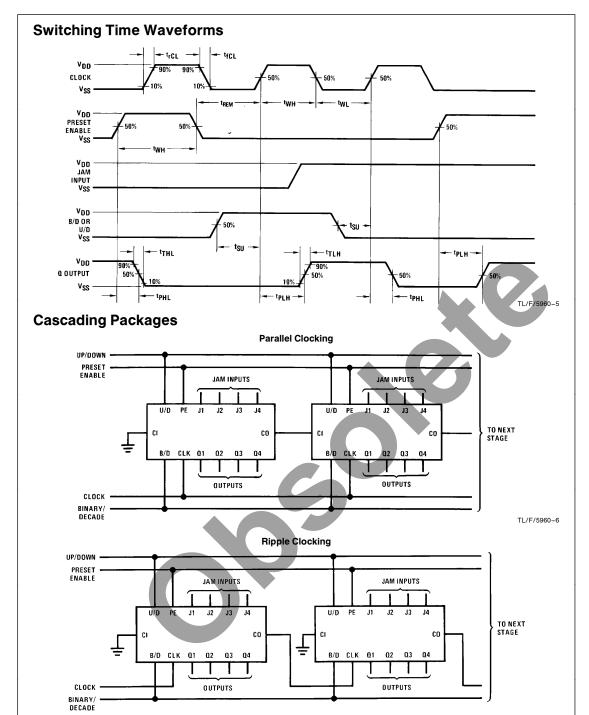

TL/F/5960-7

Carry out lines at the 2nd or later stages may have a negative-going spike due to differential internal delays. These spikes do not affect counter operation, but if the carry out is used to trigger external circuitry the carry out should be gated with the clock.



Physical Dimensions inches (millimeters) 0.785 [19.94] MAX <u>ለ ለ ለ ለ</u> 0.220-0.310 [5.59-7.87] R [0.025 R 0.005-0.020 TYP 0.005 [0.13] -0.290-0.320 __0.055 ± 0.005 TYP GLASS SEALANT 0.200 [5.08] MAX TYP 0.180 MAX [4.57] 0.010 ± 0.002 TYP 0.150 MIN TYP [3.81] 0.125-0.200 TYF [3.18-5.08] 0.080 [2.03] MAX BOTH ENDS 0.310-0.410 [7.87-10.41] 0.018 ± 0.003 TYP J16A (REV L) 0.100 ± 0.010 TYP [2.54 ± 0.25] Order Number CD4029BMJ or CD4029BCJ NS Package Number J16A 0.740 - 0.780 (18.80 - 19.81) 16 15 14 13 12 11 10 9 16 15 [INDEX AREA 0.250 ± 0.010 (6.350 ± 0.254) Ó 1 2 3 4 5 6 7 8 OPTION 01 $\frac{0.060}{(1.524)}$ TYP 4º TYP OPTIONAL 0.145 = 0.200 (3.683 = 5.080) 0.008 = 0.016 (0.203 = 0.406) TYP 90° ± 4° TYP 0.030 ± 0.015 (0.762 ± 0.381) 0.125 - 0.150 (3.175 - 3.810) 0.014 - 0.023 (0.356 - 0.584) TYP 0.100 ± 0.010 (2.540 ± 0.254) (0.325 +0.040 N16E (REV F) (8.255 +1.016 -0.381 Order Number CD4029BMN or CD4029BCN NS Package Number N16E

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- 2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor

National Semiconducto Corporation 1111 West Bardin Road Arlington, TX 76017 Tel: 1(800) 272-9959 Fax: 1(800) 737-7018

National Semiconductor Europe

Fax: (+49) 0-180-530 85 86 Fax: (+49) U-18U-35U oo oo Email: onjwege etevm2.nsc.com Deutsch Tel: (+49) 0-180-530 85 85 English Tei: (+49) 0-180-532 78 32 Français Tel: (+49) 0-180-532 93 58 Italiano Tel: (+49) 0-180-534 16 80

National Semiconductor Hong Kong Ltd.
13th Floor, Straight Block,
Ocean Centre, 5 Canton Rd. Tsimshatsui, Kowloon

Hong Kong Tel: (852) 2737-1600 Fax: (852) 2736-9960

National Semiconductor Japan Ltd.
Tel: 81-043-299-2309
Fax: 81-043-299-2408

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products	Applications
----------	--------------

Audio www.ti.com/audio Communications and Telecom www.ti.com/communications **Amplifiers** amplifier.ti.com Computers and Peripherals www.ti.com/computers dataconverter.ti.com Consumer Electronics www.ti.com/consumer-apps **Data Converters DLP® Products** www.dlp.com **Energy and Lighting** www.ti.com/energy DSP dsp.ti.com Industrial www.ti.com/industrial Clocks and Timers www.ti.com/clocks Medical www.ti.com/medical Interface interface.ti.com Security www.ti.com/security

Logic logic.ti.com Space, Avionics and Defense www.ti.com/space-avionics-defense

Power Mgmt power.ti.com Transportation and Automotive www.ti.com/automotive
Microcontrollers microcontroller.ti.com Video and Imaging www.ti.com/video

RFID <u>www.ti-rfid.com</u>

OMAP Mobile Processors <u>www.ti.com/omap</u>

Wireless Connectivity www.ti.com/wirelessconnectivity

TI E2E Community Home Page e2e.ti.com

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2011, Texas Instruments Incorporated