# CD54HC573, CD74HC573 OCTAL TRANSPARENT D-TYPE LATCHES WITH 3-STATE OUTPUTS

CD54HC573...F PACKAGE

CD74HC573...E OR M PACKAGE

(TOP VIEW)

<u>oe</u> l

1D **∏** 2

2D **∏** 3

3D **∏** 4

4D 🛮 5

5D 🛮 6

7D **∏** 8

8D 🛮 9

GND ∏

6D Π

SCLS454A - FEBRUARY 2001 - REVISED APRIL 2003

20 VCC

19**∏** 1Q

18**∏** 2Q

17 🛮 3Q

16 🛮 4Q

15**∏** 5Q

14**∏** 6Q

13 7Q 12 8Q

11 **∏** LE

- 2-V to 6-V V<sub>CC</sub> Operation
- Wide Operating Temperature Range of –55°C to 125°C
- 3-State Outputs Directly Drive Bus Lines
- Balanced Propagation Delays and Transition Times
- Bus Driver Outputs Drive Up To 15 LS-TTL Loads
- Significant Power Reduction Compared to LS-TTL Logic ICs

## description/ordering information

The 'HC573 devices are octal transparent D-type latches designed for 2-V to 6-V  $V_{CC}$  operation.

When the latch-enable (LE) input is high, the Q outputs follow the data (D) inputs. When LE is low, the Q outputs are latched at the logic levels of the D inputs.

A buffered output-enable  $(\overline{OE})$  input can be used to place the eight outputs in either a normal logic state (high or low) or the high-impedance state. In the high-impedance state, the outputs neither load nor drive the bus lines significantly. The high-impedance state and increased drive provide the capability to drive bus lines without interface or pullup components.

OE does not affect the internal operations of the latches. Old data can be retained or new data can be entered while the outputs are in the high-impedance state.

To ensure the high-impedance state during power up or power down,  $\overline{OE}$  should be tied to  $V_{CC}$  through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.

#### ORDERING INFORMATION

TA	PACKAGE†		ORDERABLE PART NUMBER	TOP-SIDE MARKING
	PDIP – E	Tube	CD74HC573E	CD74HC573E
–55°C to 125°C	SOIC - M	Tube	CD74HC573M	HC573M
-33 0 10 123 0		Tape and reel	CD74HC573M96	TIC373WI
	CDIP – F	Tube	CD54HC573F3A	CD54HC573F3A

<sup>†</sup> Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.




SCLS454A - FEBRUARY 2001 - REVISED APRIL 2003

#### **FUNCTION TABLE** (each latch)

	INPUTS	OUTPUT	
Œ	LE	D	Q
L	Н	Н	Н
L	Н	L	L
L	L	Χ	Q <sub>0</sub>
Н	Χ	Χ	Z

## logic diagram (positive logic)

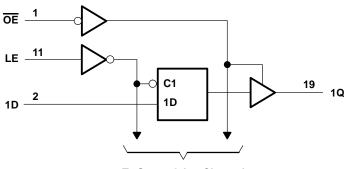

To Seven Other Channels

## absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage range, V <sub>CC</sub>	–0.5 V to 7 V
Input clamp current, $I_{IK}$ ( $V_I < 0$ or $V_I > V_{CC}$ ) (see Note 1)	±20 mA
Output clamp current, I <sub>OK</sub> (V <sub>O</sub> < 0 or V <sub>O</sub> > V <sub>CC</sub> ) (see Note 1)	±20 mA
Continuous output drain current per output, $I_O$ ( $V_O = 0$ to $V_{CC}$ )	±35 mA
Continuous output source or sink current per output, $I_O(V_O = 0 \text{ to } V_{CC})$	±25 mA
Continuous current through V <sub>CC</sub> or GND	±50 mA
Package thermal impedance, θ <sub>JA</sub> (see Note 2): E package	69°C/W
M package	58°C/W
Storage temperature range, T <sub>stq</sub>	–65°C to 150°C

<sup>†</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES: 1. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.
  - 2. The package thermal impedance is calculated in accordance with JESD 51-7.



## recommended operating conditions (see Note 3)

				25°C	T <sub>A</sub> = -		T <sub>A</sub> = -40°C TO 85°C		UNIT
			MIN	MAX	MIN	MAX	MIN	MAX	
VCC	Supply voltage		2	6	2	6	2	6	V
		V <sub>CC</sub> = 2 V	1.5		1.5		1.5		
٧ıH	High-level input voltage	$V_{CC} = 4.5 \text{ V}$	3.15		3.15		3.15		V
		V <sub>CC</sub> = 6 V	4.2		4.2		4.2		
		V <sub>CC</sub> = 2 V		0.5		0.5		0.5	
٧ <sub>IL</sub>	Low-level input voltage	$V_{CC} = 4.5 \text{ V}$		1.35		1.35		1.35	V
		VCC = 6 V		1.8		1.8		1.8	
٧ <sub>I</sub>	Input voltage		0	VCC	0	VCC	0	VCC	V
٧o	Output voltage		0	VCC	0	VCC	0	VCC	V
		V <sub>CC</sub> = 2 V		1000		1000		1000	
t <sub>t</sub>	Input transition (rise and fall) time	V <sub>CC</sub> = 4.5 V		500		500		500	ns
		V <sub>CC</sub> = 6 V		400		400		400	

NOTE 3: All unused inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation. Refer to the TI application report, Implications of Slow or Floating CMOS Inputs, literature number SCBA004.

## electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST C	Vcc	T <sub>A</sub> =	25°C	T <sub>A</sub> = -		T <sub>A</sub> = -40°C TO 85°C		UNIT	
				MIN	MAX	MIN	MAX	MIN	MAX	
			2 V	1.9		1.9		1.9		
		$I_{OH} = -20 \mu A$	4.5 V	4.4		4.4		4.4		
Voн	$V_I = V_{IH}$ or $V_{IL}$		6 V	5.9		5.9		5.9		V
		$I_{OH} = -6 \text{ mA}$	4.5 V	3.98		3.7		3.84		
		$I_{OH} = -7.8 \text{ mA}$	6 V	5.48		5.2		5.34		
			2 V		0.1		0.1		0.1	
		Ι <sub>ΟL</sub> = 20 μΑ	4.5 V		0.1		0.1		0.1	
VOL	$V_I = V_{IH} \text{ or } V_{IL}$		6 V		0.1		0.1		0.1	V
		$I_{OL} = 6 \text{ mA}$	4.5 V		0.26		0.4		0.33	
		$I_{OL} = 7.8 \text{ mA}$	6 V		0.26		0.4		0.33	
lį	$V_I = V_{CC}$ or 0		6 V		±0.1		±1		±1	μΑ
loz	VO = VCC or 0		6 V		±0.5		±10		±5	μΑ
lcc	$V_I = V_{CC}$ or 0,	I <sub>O</sub> = 0	6 V		8		160		80	μΑ
C <sub>i</sub>					10		10		10	pF
Co					20		20		20	pF

# CD54HC573, CD74HC573 **OCTAL TRANSPARENT D-TYPE LATCHES** WITH 3-STATE OUTPUTS

SCLS454A - FEBRUARY 2001 - REVISED APRIL 2003

## timing requirements over recommended operating free-air temperature range (unless otherwise noted) (see Figure 1)

		Vcc		V <sub>CC</sub> T <sub>A</sub> = 25°C		T <sub>A</sub> = -		T <sub>A</sub> = -40°C TO 85°C		UNIT
			MIN	MAX	MIN	MAX	MIN	MAX		
t <sub>W</sub> Pulse duration, LE high		2 V	80		120		100			
	Pulse duration, LE high	4.5 V	16		24		20		ns	
		6 V	14		20		17			
		2 V	50		75		65		ns	
t <sub>su</sub>	Setup time, data before LE↓	4.5 V	10		15		13			
		6 V	9		13		11			
		2 V	40		60		50		ns	
t <sub>h</sub>	Hold time, data after LE↓	4.5 V	8		12		10			
		6 V	7		10		9			

## switching characteristics over recommended operating free-air temperature range (unless otherwise noted) (see Figure 1)


PARAMETER	FROM (INPUT)	TO (OUTPUT)	LOAD CAPACITANCE	v <sub>cc</sub>	T <sub>A</sub> = 25°C	T <sub>A</sub> = -55°C TO 125°C	T <sub>A</sub> = -40°C TO 85°C	UNIT																							
	(1141 01)	(001101)	CALACITANCE		MIN MAX	MIN MAX	MIN MAX																								
			C <sub>L</sub> = 50 pF	2 V	175	265	220																								
	D	Q		4.5 V	35	53	44																								
<b>.</b> .						6 V	30	45	37	ns																					
ιpd	<sup>t</sup> pd			2 V	175	265	220	115																							
	LE Q	Q	$C_{L} = 50 \text{ pF}$	4.5 V	35	53	44																								
				6 V	30	45	37																								
		Q		2 V	150	225	190																								
t <sub>en</sub>	ŌĒ		Q	C <sub>L</sub> = 50 pF	4.5 V	30	45	38	ns																						
																			6 V	26	38	33									
				2 V	150	225	190																								
<sup>t</sup> dis	ŌĒ	Q	C <sub>L</sub> = 50 pF	4.5 V	30	45	38	ns																							
				6 V	26	38	33																								
			C <sub>L</sub> = 50 pF	2 V	60	90	75																								
t <sub>t</sub>		Q		C <sub>L</sub> = 50 pF	$C_{L} = 50 \text{ pF}$	C <sub>L</sub> = 50 pF	C <sub>L</sub> = 50 pF	C <sub>L</sub> = 50 pF	C <sub>L</sub> = 50 pF	C <sub>L</sub> = 50 pF	C <sub>L</sub> = 50 pF	C <sub>L</sub> = 50 pF	C <sub>L</sub> = 50 pF	C <sub>L</sub> = 50 pF	C <sub>L</sub> = 50 pF	C <sub>L</sub> = 50 pF	C <sub>L</sub> = 50 pF	C <sub>L</sub> = 50 pF	C <sub>L</sub> = 50 pF	C <sub>L</sub> = 50 pF	C <sub>L</sub> = 50 pF	C <sub>L</sub> = 50 pF	C <sub>L</sub> = 50 pF	C <sub>L</sub> = 50 pF	C <sub>L</sub> = 50 pF	$C_L = 50 pF$	C <sub>L</sub> = 50 pF	4.5 V	12	18	15
				6 V	10	15	13																								

# operating characteristics, $V_{CC} = 5 \text{ V}$ , $T_A = 25^{\circ}\text{C}$

	PARAMETER	TYP	UNIT
Ср	Power dissipation capacitance	51	pF



#### PARAMETER MEASUREMENT INFORMATION

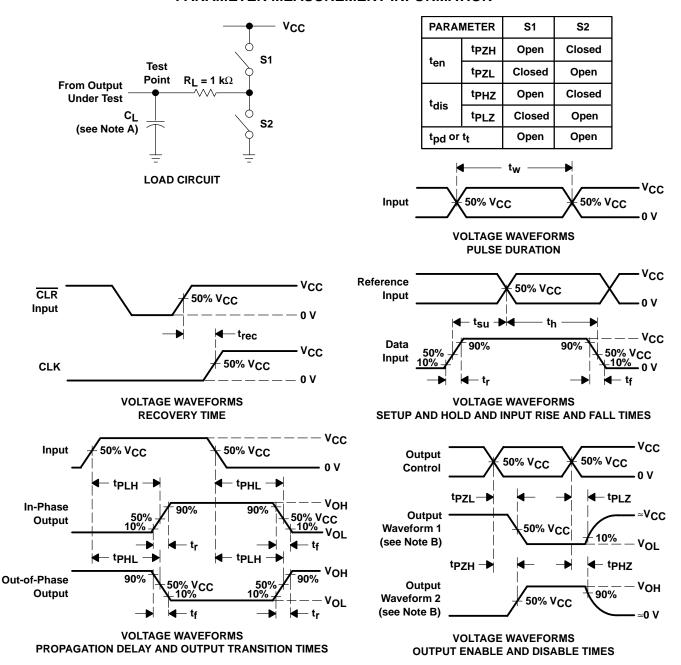

- NOTES: A. C<sub>L</sub> includes probe and test-fixture capacitance.
  - B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
  - C. Phase relationships between waveforms were chosen arbitrarily. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  1 MHz,  $Z_O = 50 \Omega$ ,  $t_f = 6 \text{ ns}$ ,  $t_f = 6 \text{ ns}$ .
  - D. For clock inputs, f<sub>max</sub> is measured with the input duty cycle at 50%.
  - E. The outputs are measured one at a time with one input transition per measurement.
  - F. tpLz and tpHz are the same as tdis.
  - G. tp71 and tp7H are the same as ten.
  - H. tpLH and tpHL are the same as tpd.

Figure 1. Load Circuit and Voltage Waveforms



#### PACKAGE OPTION ADDENDUM

www.ti.com 15-Oct-2009

#### PACKAGING INFORMATION

Orderable Device	Status <sup>(1)</sup>	Package Type	Package Drawing	Pins	Package Qty	Eco Plan <sup>(2)</sup>	Lead/Ball Finish	MSL Peak Temp <sup>(3)</sup>
CD54HC573F	ACTIVE	CDIP	J	20	1	TBD	A42	N / A for Pkg Type
CD54HC573F3A	ACTIVE	CDIP	J	20	1	TBD	A42	N / A for Pkg Type
CD74HC573E	ACTIVE	PDIP	N	20	20	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type
CD74HC573EE4	ACTIVE	PDIP	N	20	20	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type
CD74HC573M	ACTIVE	SOIC	DW	20	25	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
CD74HC573M96	ACTIVE	SOIC	DW	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
CD74HC573M96G4	ACTIVE	SOIC	DW	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
CD74HC573MG4	ACTIVE	SOIC	DW	20	25	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

**Pb-Free** (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

# PACKAGE MATERIALS INFORMATION


www.ti.com 14-Jul-2012

## TAPE AND REEL INFORMATION

#### **REEL DIMENSIONS**

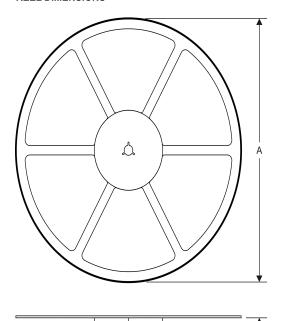

#### **TAPE DIMENSIONS**

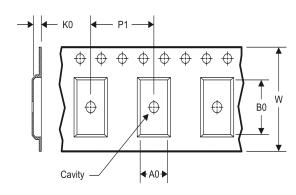

A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

### TAPE AND REEL INFORMATION

#### \*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
CD74HC573M96	SOIC	DW	20	2000	330.0	24.4	10.8	13.0	2.7	12.0	24.0	Q1

www.ti.com 14-Jul-2012



#### \*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
CD74HC573M96	SOIC	DW	20	2000	367.0	367.0	45.0

#### 14 LEADS SHOWN



NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. This package is hermetically sealed with a ceramic lid using glass frit.
- D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
- E. Falls within MIL STD 1835 GDIP1-T14, GDIP1-T16, GDIP1-T18 and GDIP1-T20.

# N (R-PDIP-T\*\*)

# PLASTIC DUAL-IN-LINE PACKAGE

16 PINS SHOWN



NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
- The 20 pin end lead shoulder width is a vendor option, either half or full width.



DW (R-PDSO-G20)

## PLASTIC SMALL OUTLINE




NOTES: A. All linear dimensions are in inches (millimeters). Dimensioning and tolerancing per ASME Y14.5M-1994.

- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).
- D. Falls within JEDEC MS-013 variation AC.



DW (R-PDSO-G20)

PLASTIC SMALL OUTLINE

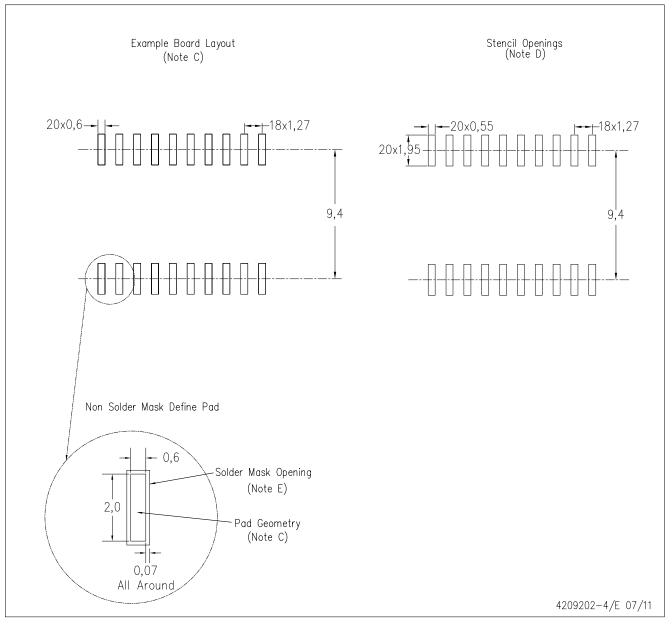

NOTES:

- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Refer to IPC7351 for alternate board design.
- D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC—7525
- E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.



#### IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46C and to discontinue any product or service per JESD48B. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have not been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components which meet ISO/TS16949 requirements, mainly for automotive use. Components which have not been so designated are neither designed nor intended for automotive use; and TI will not be responsible for any failure of such components to meet such requirements.

Applications

**Products** Audio www.ti.com/audio **Amplifiers** amplifier.ti.com **Data Converters** dataconverter.ti.com **DLP® Products** www.dlp.com DSP dsp.ti.com Clocks and Timers www.ti.com/clocks Interface interface.ti.com Logic logic.ti.com Power Mgmt power.ti.com Microcontrollers microcontroller.ti.com

www.ti-rfid.com **OMAP Mobile Processors** www.ti.com/omap

Wireless Connectivity www.ti.com/wirelessconnectivity Automotive and Transportation www.ti.com/automotive www.ti.com/communications Communications and Telecom Computers and Peripherals www.ti.com/computers Consumer Electronics www.ti.com/consumer-apps **Energy and Lighting** www.ti.com/energy Industrial www.ti.com/industrial Medical www.ti.com/medical Security www.ti.com/security

Space, Avionics and Defense www.ti.com/space-avionics-defense Video and Imaging www.ti.com/video

e2e.ti.com

**TI E2E Community**