CD54/74HC192, CD54/74HC193, CD54/74HCT193

High-Speed CMOS Logic
## Presettable Synchronous 4-Bit Up/Down Counters

Features

- **Synchronous Counting and Asynchronous Loading**

- **Two Outputs for N-Bit Cascading**

- **Look-Ahead Carry for High-Speed Counting**

- **Fanout (Over Temperature Range)**
  - **Standard Outputs . . . . 10 LSTTL Loads**
  - **Bus Driver Outputs . . . . 15 LSTTL Loads**

- **Wide Operating Temperature Range . . . -55^{o}C to 125^{o}C**

- **Balanced Propagation Delay and Transition Times**

- **Significant Power Reduction Compared to LSTTL Logic ICs**

- **HC Types**
  - **2V to 6V Operation**
  - **High Noise Immunity: N_{IL} = 30%, N_{IH} = 30% of V_{CC} at V_{CC} = 5V**

- **HCT Types**
  - **4.5V to 5.5V Operation**
  - **Direct LSTTL Input Logic Compatibility, V_{IL} = 0.8V (Max), V_{IH} = 2V (Min)**
  - **CMOS Input Compatibility, $I_I \leq 1\mu A$ at V_{OL}, V_{OH}**

Description

The 'HC192, 'HC193 and 'HCT193 are asynchronously presettable BCD Decade and Binary Up/Down synchronous counters, respectively.

Pinout

CD54HC192, CD54HC193, CD54HCT193 (CERDIP)
CD74HC192 (PDIP, SOP, TSSOP)
CD74HC193 (PDIP, SOIC)
CD74HCT193 (PDIP)
TOP VIEW

P1	1	16 V_{CC}
Q1	2	15 P0
Q0	3	14 MR
CPD	4	13 TCD
CPU	5	12 TCU
Q2	6	11 $\overline{PL}$
Q3	7	10 P2
GND	8	9 P3

Presetting the counter to the number on the preset data inputs (P0-P3) is accomplished by a LOW asynchronous parallel load input ($\overline{PL}$). The counter is incremented on the low-to-high transition of the Clock-Up input (and a high level on the Clock-Down input) and decremented on the low to high transition of the Clock-Down input (and a high level on the Clock-up input). A high level on the MR input overrides any other input to clear the counter to its zero state. The Terminal Count up (carry) goes low half a clock period before the zero count is reached and returns to a high level at the zero count. The Terminal Count Down (borrow) in the count down mode likewise goes low half a clock period before the maximum count (9 in the 192 and 15 in the 193) and returns to high at the maximum count. Cascading is effected by connecting the carry and borrow outputs of a less significant counter to the Clock-Up and Clock-Down inputs, respectively, of the next most significant counter.
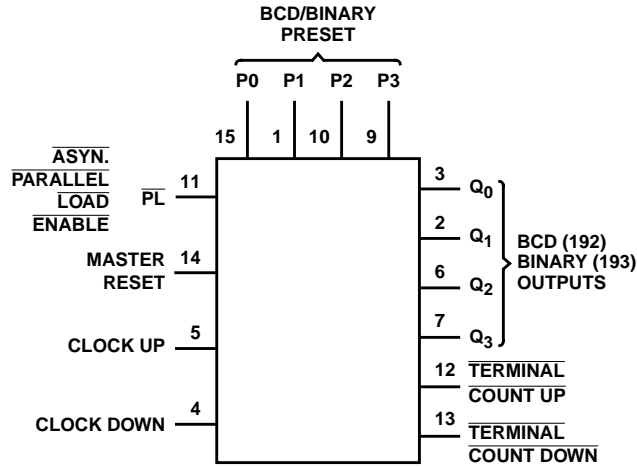
If a decade counter is preset to an illegal state or assumes an illegal state when power is applied, it will return to the normal sequence in one count as shown in state diagram.

Ordering Information

PART NUMBER	TEMP. RANGE (^{o}C)	PACKAGE
CD54HC192F3A	-55 to 125	16 Ld CERDIP
CD54HC193F3A	-55 to 125	16 Ld CERDIP
CD54HCT193F3A	-55 to 125	16 Ld CERDIP
CD74HC192E	-55 to 125	16 Ld PDIP
CD74HC192NSR	-55 to 125	16 Ld SOP
CD74HC192PW	-55 to 125	16 Ld TSSOP
CD74HC192PWR	-55 to 125	16 Ld TSSOP
CD74HC192PWT	-55 to 125	16 Ld TSSOP
CD74HC193E	-55 to 125	16 Ld PDIP
CD74HC193M	-55 to 125	16 Ld SOIC
CD74HC193MT	-55 to 125	16 Ld SOIC
CD74HC193M96	-55 to 125	16 Ld SOIC
CD74HCT193E	-55 to 125	16 Ld PDIP

NOTE: When ordering, use the entire part number. The suffixes 96 and R denote tape and reel. The suffix T denotes a small-quantity reel of 250.

Functional Diagram

BCD/BINARY
PRESET

P0 P1 P2 P3

15 1 10 9

$\overline{\text{ASYN.}}$
$\overline{\text{PARALLEL}}$
$\overline{\text{LOAD}}$ $\overline{\text{PL}}$ 11
$\overline{\text{ENABLE}}$

MASTER 14
RESET

CLOCK UP 5

CLOCK DOWN 4

3 Q_0
2 Q_1 BCD (192)
6 Q_2 BINARY (193)
7 Q_3 OUTPUTS

12 $\overline{\text{TERMINAL}}$
$\overline{\text{COUNT UP}}$

13 $\overline{\text{TERMINAL}}$
$\overline{\text{COUNT DOWN}}$

TRUTH TABLE

CLOCK UP	CLOCK DOWN	RESET	PARALLEL LOAD	FUNCTION
↑	H	L	H	Count Up
H	↑	L	H	Count Down
X	X	H	X	Reset
X	X	L	L	Load Preset Inputs

H = High Voltage Level, L = Low Voltage Level, X = Don't Care, ↑ = Transition from Low to High Level

15000

Absolute Maximum Ratings

DC Supply Voltage, V_{CC} . . . . -0.5V to 7V
DC Input Diode Current, I_{IK}
   For V_I < -0.5V or V_I > V_{CC} + 0.5V . . . . ±20mA
DC Output Diode Current, I_{OK}
   For V_O < -0.5V or V_O > V_{CC} + 0.5V . . . . ±20mA
DC Output Source or Sink Current per Output Pin, I_O
   For V_O > -0.5V or V_O < V_{CC} + 0.5V . . . . ±25mA
DC V_{CC} or Ground Current, $I_{CC\ or}\ I_{GND}$ . . . . ±50mA

Operating Conditions

Temperature Range (T_A) . . . . -55^{o}C to 125^{o}C
Supply Voltage Range, V_{CC}
   HC Types . . . . .2V to 6V
   HCT Types . . . . .4.5V to 5.5V
DC Input or Output Voltage, V_I, V_O . . . . 0V to V_{CC}
Input Rise and Fall Time
   2V . . . . 1000ns (Max)
   4.5V. . . . . 500ns (Max)
   6V . . . . 400ns (Max)

Thermal Information

Package Thermal Impedance, θ_{JA} (see Note 1):
   E (PDIP) Package . . . . .67^{o}C/W
   M (SOIC) Package. . . . . .73^{o}C/W
   NS (SOP) Package . . . . 64^{o}C/W
   PW (TSSOP) Package . . . . 108^{o}C/W
Maximum Junction Temperature . . . . 150^{o}C
Maximum Storage Temperature Range . . . .-65^{o}C to 150^{o}C
Maximum Lead Temperature (Soldering 10s) . . . . 300^{o}C
   (SOIC - Lead Tips Only)

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

NOTE:

1. The package thermal impedance is calculated in accordance with JESD 51-7.

DC Electrical Specifications

PARAMETER	SYMBOL	TEST CONDITIONS			25^{o}C			-40^{o}C TO 85^{o}C		-55^{o}C TO 125^{o}C		UNITS
		V_I (V)	I_O (mA)	V_{CC} (V)	MIN	TYP	MAX	MIN	MAX	MIN	MAX	
HC TYPES												
High Level Input Voltage	V_{IH}	-	-	2	1.5	-	-	1.5	-	1.5	-	V
				4.5	3.15	-	-	3.15	-	3.15	-	V
				6	4.2	-	-	4.2	-	4.2	-	V
Low Level Input Voltage	V_{IL}	-	-	2	-	-	0.5	-	0.5	-	0.5	V
				4.5	-	-	1.35	-	1.35	-	1.35	V
				6	-	-	1.8	-	1.8	-	1.8	V
High Level Output Voltage CMOS Loads	V_{OH}	V_{IH} or V_{IL}	-0.02	2	1.9	-	-	1.9	-	1.9	-	V
			-0.02	4.5	4.4	-	-	4.4	-	4.4	-	V
			-0.02	6	5.9	-	-	5.9	-	5.9	-	V
High Level Output Voltage TTL Loads			-4	4.5	3.98	-	-	3.84	-	3.7	-	V
			-5.2	6	5.48	-	-	5.34	-	5.2	-	V
Low Level Output Voltage CMOS Loads	V_{OL}	V_{IH} or V_{IL}	0.02	2	-	-	0.1	-	0.1	-	0.1	V
			0.02	4.5	-	-	0.1	-	0.1	-	0.1	V
			0.02	6	-	-	0.1	-	0.1	-	0.1	V
Low Level Output Voltage TTL Loads			4	4.5	-	-	0.26	-	0.33	-	0.4	V
			5.2	6	-	-	0.26	-	0.33	-	0.4	V
Input Leakage Current	I_I	V_{CC} or GND	-	6	-	-	±0.1	-	±1	-	±1	µA
Quiescent Device Current	I_{CC}	V_{CC} or GND	0	6	-	-	8	-	80	-	160	µA

DC Electrical Specifications   (Continued)

PARAMETER	SYMBOL	TEST CONDITIONS			25°C			-40°C TO 85°C		-55°C TO 125°C		UNITS
		V_I (V)	I_O (mA)	V_{CC} (V)	MIN	TYP	MAX	MIN	MAX	MIN	MAX	
HCT TYPES												
High Level Input Voltage	V_{IH}	-	-	4.5 to 5.5	2	-	-	2	-	2	-	V
Low Level Input Voltage	V_{IL}	-	-	4.5 to 5.5	-	-	0.8	-	0.8	-	0.8	V
High Level Output Voltage CMOS Loads	V_{OH}	V_{IH} or V_{IL}	-0.02	4.5	4.4	-	-	4.4	-	4.4	-	V
High Level Output Voltage TTL Loads			-4	4.5	3.98	-	-	3.84	-	3.7	-	V
Low Level Output Voltage CMOS Loads	V_{OL}	V_{IH} or V_{IL}	0.02	4.5	-	-	0.1	-	0.1	-	0.1	V
Low Level Output Voltage TTL Loads			4	4.5	-	-	0.26	-	0.33	-	0.4	V
Input Leakage Current	I_I	V_{CC} to GND	-	5.5	-	-	±0.1	-	±1	-	±1	µA
Quiescent Device Current	I_{CC}	V_{CC} or GND	-	5.5	-	-	8	-	80	-	160	µA
Additional Quiescent Device Current Per Input Pin: 1 Unit Load	ΔI_{CC} (Note 2)	V_{CC} - 2.1	-	4.5 to 5.5	-	100	360	-	450	-	490	µA

NOTE:

2. For dual-supply systems theoretical worst case (V_I = 2.4V, V_{CC} = 5.5V) specification is 1.8mA.

HCT Input Loading Table

INPUT	UNIT LOADS
P0-P3	0.4
MR	1.45
$\overline{PL}$	0.85
CPU, CPD	1.45

NOTE: Unit Load is ΔI_{CC} limit specified in DC Electrical Specifications table, e.g. 360µA max at 25°C.

Prerequisite For Switching Specifications

PARAMETER	SYMBOL	V_{CC} (V)	25°C			-40°C TO 85°C		-55°C TO 125°C		UNITS
			MIN	TYP	MAX	MIN	MAX	MIN	MAX	
HC TYPES										
Pulse Width	t_W	2	115	-	-	145	-	175	-	ns
CPU, CPD		4.5	23	-	-	29	-	35	-	ns
192		6	20	-	-	25	-	30	-	ns
	t_W	2	100	-	-	125	-	150	-	ns
CPU, CPD		4.5	20	-	-	25	-	30	-	ns
193		6	17	-	-	21	-	26	-	ns
$\overline{PL}$	t_W	2	80	-	-	100	-	120	-	ns
		4.5	16	-	-	20	-	24	-	ns
		6	14	-	-	17	-	20	-	ns
MR	t_W	2	100	-	-	125	-	150	-	ns
		4.5	20	-	-	25	-	30	-	ns
		6	17	-	-	21	-	26	-	ns
Set-up Time	t_{SU}	2	80	-	-	100	-	120	-	ns
Pn to $\overline{PL}$		4.5	16	-	-	20	-	24	-	ns
		6	14	-	-	17	-	20	-	ns
Hold Time	t_H	2	0	-	-	0	-	0	-	ns
Pn to $\overline{PL}$		4.5	0	-	-	0	-	0	-	ns
		6	0	-	-	0	-	0	-	ns
Hold Time	t_H	2	80	-	-	100	-	120	-	ns
CPD to CPU or		4.5	16	-	-	20	-	24	-	ns
CPU to CPD		6	14	-	-	17	-	20	-	ns
Recovery Time	t_{REC}	2	80	-	-	100	-	120	-	ns
$\overline{PL}$ to CPU, CPD		4.5	16	-	-	20	-	24	-	ns
		6	14	-	-	17	-	20	-	ns
MR to CPU, CPD	t_{REC}	2	5	-	-	5	-	5	-	ns
		4.5	5	-	-	5	-	5	-	ns
		6	5	-	-	5	-	5	-	ns
Maximum Frequency	f_{MAX}	2	5	-	-	4	-	3	-	MHz
CPU, CPD		4.5	22	-	-	18	-	15	-	MHz
192		6	24	-	-	21	-	18	-	MHz
	f_{MAX}	2	5	-	-	4	-	3	-	MHz
CPU, CPD		4.5	25	-	-	20	-	17	-	MHz
193		6	29	-	-	24	-	20	-	MHz
HCT TYPES										
Pulse Width	t_W	2	-	-	-	-	-	-	-	ns
CPU, CPD		4.5	23	-	-	29	-	35	-	ns
192		6	-	-	-	-	-	-	-	ns
CPU, CPD	t_W	2	-	-	-	-	-	-	-	ns
193		4.5	23	-	-	29	-	35	-	ns
		6	-	-	-	-	-	-	-	ns

Prerequisite For Switching Specifications   (Continued)

PARAMETER	SYMBOL	V_{CC} (V)	25°C			-40°C TO 85°C		-55°C TO 125°C		UNITS
			MIN	TYP	MAX	MIN	MAX	MIN	MAX	
$\overline{PL}$	t_W	2	-	-	-	-	-	-	-	ns
		4.5	16	-	-	20	-	24	-	ns
		6	-	-	-	-	-	-	-	ns
MR	t_W	2	-	-	-	-	-	-	-	ns
		4.5	20	-	-	25	-	30	-	ns
		6	-	-	-	-	-	-	-	ns
Set-up Time Pn to $\overline{PL}$	t_{SU}	2	-	-	-	-	-	-	-	ns
		4.5	15	-	-	19	-	22	-	ns
		6	-	-	-	-	-	-	-	ns
Hold Time Pn to $\overline{PL}$	t_H	2	-	-	-	-	-	-	-	ns
		4.5	0	-	-	0	-	0	-	ns
		6	-	-	-	-	-	-	-	ns
Hold Time CPD to CPU or CPU to CPD	t_H	2	-	-	-	-	-	-	-	ns
		4.5	16	-	-	20	-	24	-	ns
		6	-	-	-	-	-	-	-	ns
Recovery Time $\overline{PL}$ to CPU, CPD	t_{REC}	2	-	-	-	-	-	-	-	ns
		4.5	15	-	-	19	-	22	-	ns
		6	-	-	-	-	-	-	-	ns
MR to CPU, CPD	t_{REC}	2	-	-	-	-	-	-	-	ns
		4.5	5	-	-	5	-	5	-	ns
		6	-	-	-	-	-	-	-	ns
Maximum Frequency CPU, CPD 192	f_{MAX}	2	-	-	-	-	-	-	-	MHz
		4.5	22	-	-	18	-	15	-	MHz
		6	-	-	-	-	-	-	-	MHz
CPU, CPD 193	f_{MAX}	2	-	-	-	-	-	-	-	MHz
		4.5	22	-	-	18	-	15	-	MHz
		6	-	-	-	-	-	-	-	MHz

Switching Specifications Input t_r, t_f = 6ns

PARAMETER	SYMBOL	TEST CONDITIONS	V_{CC} (V)	25°C			-40°C TO 85°C		-55°C TO 125°C		UNITS
				MIN	TYP	MAX	MIN	MAX	MIN	MAX	
HC TYPES											
Propagation Delay CPU to $\overline{TCU}$	t_{PLH}, t_{PHL}	C_L = 50pF	2	-	-	125	-	155	-	190	ns
		C_L = 50pF	4.5	-	-	25	-	31	-	38	ns
		C_L = 15pF	5	-	10	-	-	-	-	-	ns
		C_L = 50pF	6	-		21	-	26	-	32	ns
CPD to $\overline{TCD}$	t_{PLH}, t_{PHL}	C_L = 50pF	2	-	-	125	-	155	-	190	ns
		C_L = 50pF	4.5	-	-	25	-	31	-	38	ns
		C_L = 15pF	5	-	10	-	-	-	-	-	ns
		C_L = 50pF	6	-	-	21	-	26	-	32	ns
CPU to Q_n	t_{PLH}, t_{PHL}	C_L = 50pF	2	-	-	220	-	270	-	325	ns
		C_L = 50pF	4.5	-	-	43	-	54	-	65	ns
		C_L = 15pF	5	-	18	-	-	-	-	-	ns
		C_L = 50pF	6	-	-	37	-	46	-	55	ns

Switching Specifications Input t_r, t_f = 6ns **(Continued)**

PARAMETER	SYMBOL	TEST CONDITIONS	V_{CC} (V)	25°C			-40°C TO 85°C		-55°C TO 125°C		UNITS
				MIN	TYP	MAX	MIN	MAX	MIN	MAX	
CPD to Q_n	t_{PLH}, t_{PHL}	C_L = 50pF	2	-	-	220	-	270	-	325	ns
		C_L = 50pF	4.5	-	-	43	-	54	-	65	ns
		C_L = 15pF	5	-	18	-	-	-	-		ns
		C_L = 50pF	6	-	-	37	-	46	-	55	ns
$\overline{PL}$ to Q_n	t_{PLH}, t_{PHL}	C_L = 50pF	2	-	-	220	-	275	-	330	ns
		C_L = 50pF	4.5	-	-	44	-	55	-	66	ns
		C_L = 15pF	5	-	18	-	-	-	-	-	ns
		C_L = 50pF	6	-	-	37	-	47	-	56	ns
MR to Q_n	t_{PHL}	C_L = 50pF	2	-	-	200	-	250	-	300	ns
		C_L = 50pF	4.5	-	-	40	-	50	-	60	ns
		C_L = 15pF	5	-	17	-	-	-	-	-	ns
		C_L = 50pF	6	-	-	34	-	43	-	51	ns
Transition Time Q, TCU, TCD	t_{TLH}, t_{THL}	C_L = 50pF	2	-	-	75	-	95	-	110	ns
			4.5	-	-	15	-	19	-	22	ns
			6	-	-	13	-	16	-	19	ns
Input Capacitance	C_{IN}	C_L = 50pF	-	-	-	10	-	10	-	10	pF
Power Dissipation Capacitance (Notes 3, 4)	C_{PD}	C_L = 15pF	5	-	40	-	-	-	-	-	pF
HCT TYPES											
Propagation Delay CPU to $\overline{TCU}$	t_{PLH}, t_{PHL}	C_L = 50pF	4.5	-	-	27	-	34	-	41	ns
		C_L = 15pF	5	-	11	-	-	-	-	-	ns
CPU to $\overline{TCD}$	t_{PLH}, t_{PHL}	C_L = 50pF	4.5	-	-	27	-	34	-	41	ns
		C_L = 15pF	5	-	11	-	-	-	-	-	ns
CPU to Q_n	t_{PLH}, t_{PHL}	C_L = 50pF	4.5	-	-	40	-	50	-	60	ns
		C_L = 15pF	5	-	17	-	-	-	-	-	ns
CPD to Q_n	t_{PLH}, t_{PHL}	C_L = 50pF	4.5	-	-	40	-	50	-	60	ns
		C_L = 15pF	5	-	17	-	-	-	-	-	ns
$\overline{PL}$ to Q_n	t_{PLH}, t_{PHL}	C_L = 50pF	4.5	-	-	46	-	58	-	69	ns
		C_L = 15pF	5	-	21	-	-	-	-	-	ns
MR to Q_n	t_{PHL}	C_L = 50pF	4.5	-	-	43	-	54	-	65	ns
		C_L = 15pF	5	-	18	-	-	-	-	-	ns
Transition Time Q, TCU, TCD	t_{TLH}, t_{THL}	C_L = 50pF									
			4.5	-	-	15	-	19	-	22	ns
Input Capacitance	C_{IN}	C_L = 50pF	-	-	-	10	-	10	-	10	pF
Power Dissipation Capacitance (Notes 3, 4)	C_{PD}	C_L = 15pF	5	-	50	-	-	-	-	-	pF

NOTES:

3. C_{PD} is used to determine the dynamic power consumption, per gate.

4. $P_D = V_{CC}^2 f_i + \sum (C_L V_{CC}^2)$ where f_i = Input Frequency, C_L = Output Load Capacitance, V_{CC} = Supply Voltage.
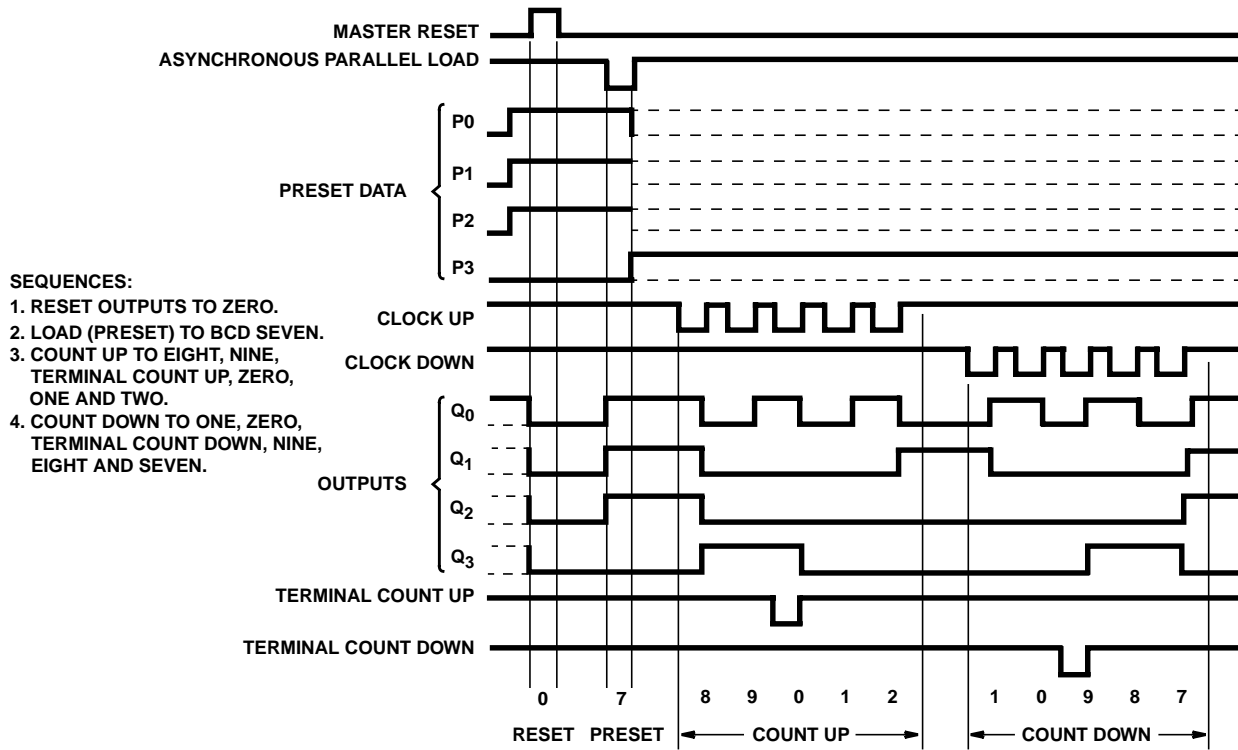
Test Circuits and Waveforms

MASTER RESET

ASYNCHRONOUS PARALLEL LOAD

PRESET DATA
- P0
- P1
- P2
- P3

SEQUENCES:
1. RESET OUTPUTS TO ZERO.
2. LOAD (PRESET) TO BCD SEVEN.
3. COUNT UP TO EIGHT, NINE,
   TERMINAL COUNT UP, ZERO,
   ONE AND TWO.
4. COUNT DOWN TO ONE, ZERO,
   TERMINAL COUNT DOWN, NINE,
   EIGHT AND SEVEN.

CLOCK UP

CLOCK DOWN

OUTPUTS
- Q_0
- Q_1
- Q_2
- Q_3

TERMINAL COUNT UP

TERMINAL COUNT DOWN

0   7   8   9   0   1   2   1   0   9   8   7

RESET PRESET |←—— COUNT UP ——→| |←—— COUNT DOWN ——→|

FIGURE 1. 'HC192 SYNCHRONOUS DECADE COUNTERS, TYPICAL RESET, PRESET AND COUNT SEQUENCES

Test Circuits and Waveforms (Continued)

SEQUENCES:
1. RESET OUTPUTS TO ZERO.
2. LOAD (PRESET) TO BINARY THIRTEEN.
3. COUNT UP TO FOURTEEN, FIFTEEN, TERMINAL COUNT UP, ZERO, ONE AND TWO.
4. COUNT DOWN TO ONE, ZERO, TERMINAL COUNT DOWN, FIFTEEN, FOURTEEN AND THIRTEEN.

NOTES:

1. Master reset overrides load data and clock inputs.

2. When counting up, clock-down input must be high. When counting down, clock-up input must be high.
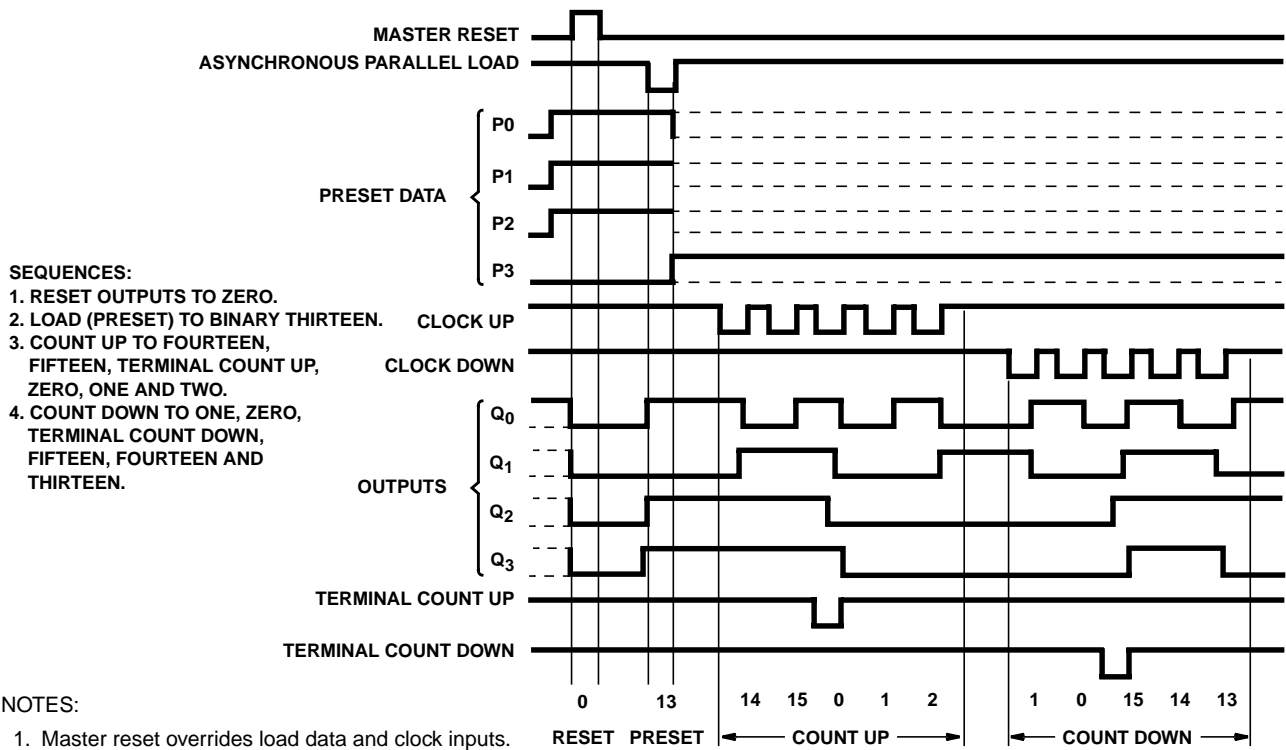
FIGURE 2. 'HC193 SYNCHRONOUS BINARY COUNTERS, TYPICAL RESET, PRESET AND COUNT SEQUENCES
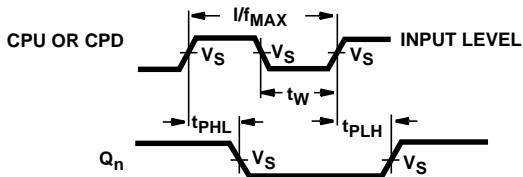
FIGURE 3. CLOCK TO OUTPUT DELAYS AND CLOCK PULSE WIDTH
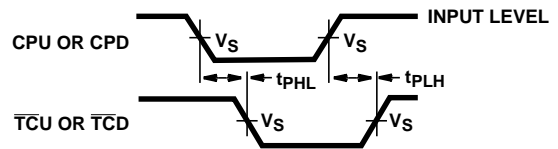
FIGURE 4. CLOCK TO TERMINAL COUNT DELAYS
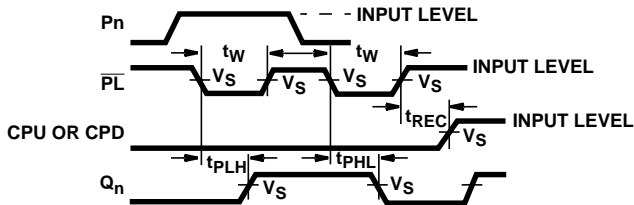
FIGURE 5. PARALLEL LOAD PULSE WIDTH, PARALLEL LOAD TO OUTPUT DELAYS, AND PARALLEL LOAD TO CLOCK RECOVERY TIME
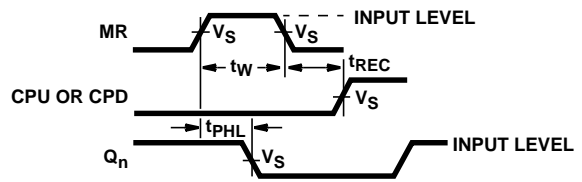
FIGURE 6. MASTER RESET PULSE WIDTH, MASTER RESET TO OUTPUT DELAY AND MASTER RESET TO CLOCK RECOVERY TIME

Test Circuits and Waveforms (Continued)
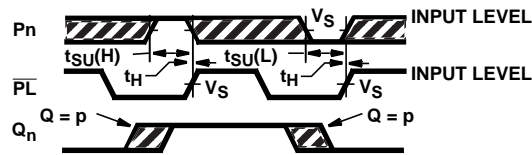
FIGURE 7. SET-UP AND HOLD TIMES DATA TO PARALLEL LOAD (PL)
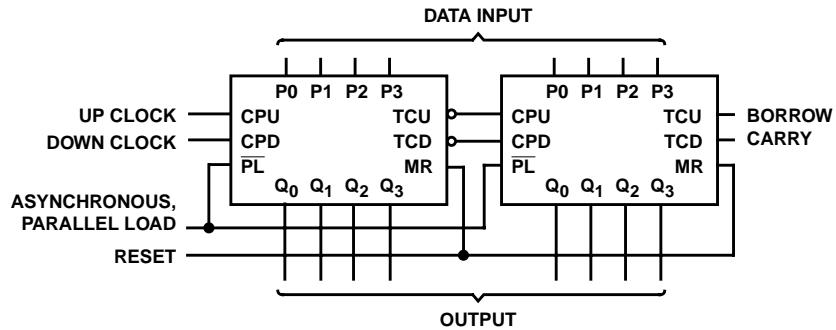
FIGURE 8. CASCADED UP/DOWN COUNTER WITH PARALLEL LOAD
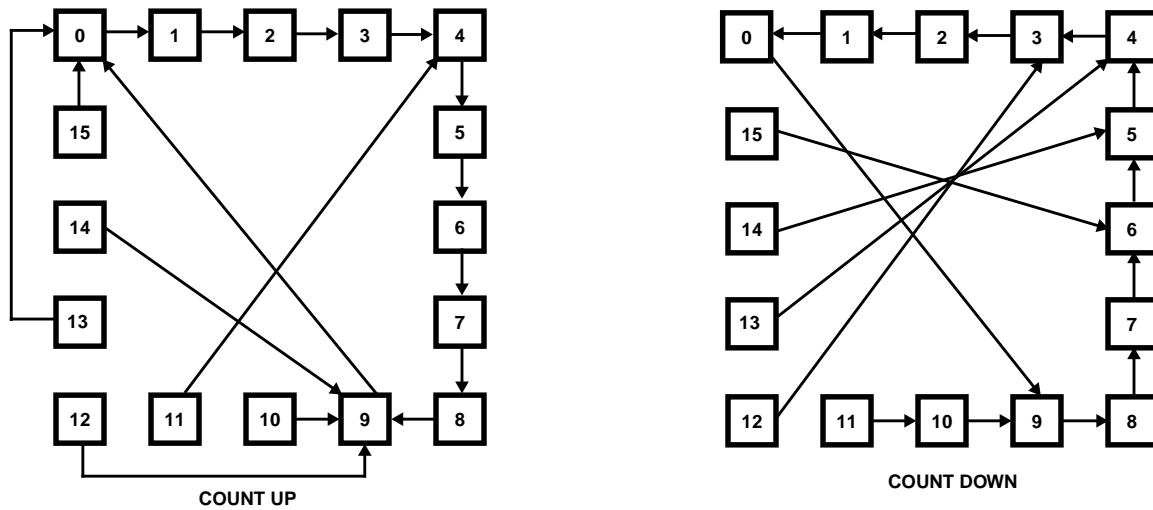
NOTE: Illegal states in BCD counters corrected in one count.   NOTE: Illegal states in BCD counters corrected in one or two counts.

COUNT UP

COUNT DOWN

FIGURE 9. 'HC192, 'HCT193 STATE DIAGRAMS

PACKAGING INFORMATION

Orderable Device	Status [1]	Package Type	Package Drawing	Pins	Package Qty	Eco Plan [2]	Lead/ Ball Finish	MSL Peak Temp [3]	Samples (Requires Login)
5962-8780801EA	ACTIVE	CDIP	J	16	1	TBD	Call TI	Call TI	
5962-9084801MEA	ACTIVE	CDIP	J	16	1	TBD	Call TI	Call TI	
9084801MEAS2035	OBSOLETE	CDIP	J	16		TBD	Call TI	Call TI	
CD54HC192F3A	ACTIVE	CDIP	J	16	1	TBD	A42	N / A for Pkg Type	
CD54HC193F3A	ACTIVE	CDIP	J	16	1	TBD	A42	N / A for Pkg Type	
CD54HCT193F3A	ACTIVE	CDIP	J	16	1	TBD	A42	N / A for Pkg Type	
CD74HC192E	ACTIVE	PDIP	N	16	25	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type	
CD74HC192EE4	ACTIVE	PDIP	N	16	25	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type	
CD74HC192NSR	ACTIVE	SO	NS	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
CD74HC192NSRE4	ACTIVE	SO	NS	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
CD74HC192NSRG4	ACTIVE	SO	NS	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
CD74HC192PWR	ACTIVE	TSSOP	PW	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
CD74HC192PWRE4	ACTIVE	TSSOP	PW	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
CD74HC192PWRG4	ACTIVE	TSSOP	PW	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
CD74HC192PWT	ACTIVE	TSSOP	PW	16	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
CD74HC192PWTE4	ACTIVE	TSSOP	PW	16	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
CD74HC192PWTG4	ACTIVE	TSSOP	PW	16	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
CD74HC193E	ACTIVE	PDIP	N	16	25	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type	
CD74HC193EE4	ACTIVE	PDIP	N	16	25	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type	
CD74HC193M	ACTIVE	SOIC	D	16	40	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
CD74HC193M96	ACTIVE	SOIC	D	16	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	

Orderable Device	Status [1]	Package Type	Package Drawing	Pins	Package Qty	Eco Plan [2]	Lead/ Ball Finish	MSL Peak Temp [3]	Samples (Requires Login)
CD74HC193M96E4	ACTIVE	SOIC	D	16	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
CD74HC193M96G4	ACTIVE	SOIC	D	16	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
CD74HC193ME4	ACTIVE	SOIC	D	16	40	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
CD74HC193MG4	ACTIVE	SOIC	D	16	40	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
CD74HC193MT	ACTIVE	SOIC	D	16	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
CD74HC193MTE4	ACTIVE	SOIC	D	16	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
CD74HC193MTG4	ACTIVE	SOIC	D	16	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
CD74HCT193E	ACTIVE	PDIP	N	16	25	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type	
CD74HCT193EE4	ACTIVE	PDIP	N	16	25	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type	

[1] The marketing status values are defined as follows:
ACTIVE: Product device recommended for new designs.
LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.
NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.
PREVIEW: Device has been announced but is not in production. Samples may or may not be available.
OBSOLETE: TI has discontinued the production of the device.

[2] Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.
TBD: The Pb-Free/Green conversion plan has not been defined.
Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.
Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.
Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

[3] MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and

continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF CD54HC192, CD54HC193, CD54HCT193, CD74HC192, CD74HC193, CD74HCT193 :

- Catalog: CD74HC192, CD74HC193, CD74HCT193

- Military: CD54HC192, CD54HC193, CD54HCT193

NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product

- Military - QML certified for Military and Defense Applications

TAPE AND REEL INFORMATION

REEL DIMENSIONS
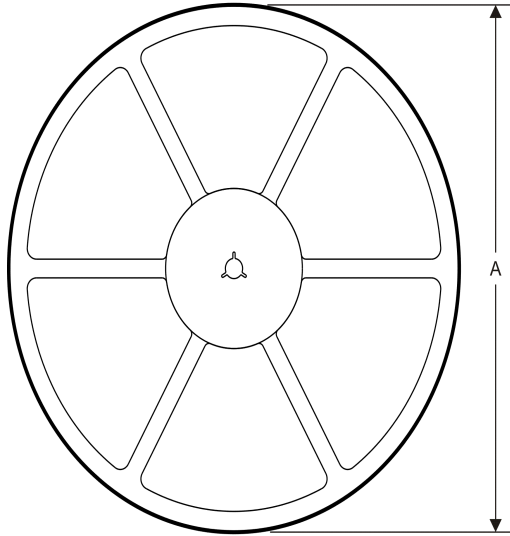
TAPE DIMENSIONS
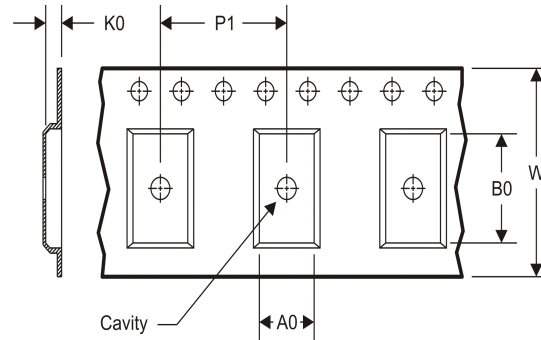
A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

TAPE AND REEL INFORMATION

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
CD74HC192NSR	SO	NS	16	2000	330.0	16.4	8.2	10.5	2.5	12.0	16.0	Q1
CD74HC192PWR	TSSOP	PW	16	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
CD74HC192PWT	TSSOP	PW	16	250	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
CD74HC193M96	SOIC	D	16	2500	330.0	16.4	6.5	10.3	2.1	8.0	16.0	Q1

TAPE AND REEL BOX DIMENSIONS

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
CD74HC192NSR	SO	NS	16	2000	367.0	367.0	38.0
CD74HC192PWR	TSSOP	PW	16	2000	367.0	367.0	35.0
CD74HC192PWT	TSSOP	PW	16	250	367.0	367.0	35.0
CD74HC193M96	SOIC	D	16	2500	333.2	345.9	28.6

DIM \ PINS **	14	16	18	20
A	0.300 (7,62) BSC	0.300 (7,62) BSC	0.300 (7,62) BSC	0.300 (7,62) BSC
B MAX	0.785 (19,94)	.840 (21,34)	0.960 (24,38)	1.060 (26,92)
B MIN	——	——	——	——
C MAX	0.300 (7,62)	0.300 (7,62)	0.310 (7,87)	0.300 (7,62)
C MIN	0.245 (6,22)	0.245 (6,22)	0.220 (5,59)	0.245 (6,22)

B

14   8

1   7

0.065 (1,65)
0.045 (1,14)

C

0.005 (0,13) MIN

0.060 (1,52)
0.015 (0,38)

0.200 (5,08) MAX

Seating Plane

0.130 (3,30) MIN

0.026 (0,66)
0.014 (0,36)

0.100 (2,54)

A

0°−15°

0.014 (0,36)
0.008 (0,20)

4040083/F 03/03

NOTES: A. All linear dimensions are in inches (millimeters).
         B. This drawing is subject to change without notice.
         C. This package is hermetically sealed with a ceramic lid using glass frit.
         D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
         E. Falls within MIL STD 1835 GDIP1−T14, GDIP1−T16, GDIP1−T18 and GDIP1−T20.

N (R−PDIP−T**)   PLASTIC DUAL−IN−LINE PACKAGE

16 PINS SHOWN

DIM \ PINS **	14	16	18	20
A MAX	0.775 (19,69)	0.775 (19,69)	0.920 (23,37)	1.060 (26,92)
A MIN	0.745 (18,92)	0.745 (18,92)	0.850 (21,59)	0.940 (23,88)
MS−001 VARIATION	AA	BB	AC	AD

0.260 (6,60) / 0.240 (6,10)

0.070 (1,78) / 0.045 (1,14) ⬦D

0.045 (1,14) / 0.030 (0,76) ⬦D

0.020 (0,51) MIN

0.325 (8,26) / 0.300 (7,62)

0.015 (0,38)

Gauge Plane

0.200 (5,08) MAX

Seating Plane

0.010 (0,25) NOM

0.125 (3,18) MIN

0.100 (2,54)

0.430 (10,92) MAX

0.021 (0,53) / 0.015 (0,38)

⊕ 0.010 (0,25) Ⓜ

14/18 Pin Only
20 Pin vendor option ⬦D

4040049/E 12/2002

NOTES: A. All linear dimensions are in inches (millimeters).
         B. This drawing is subject to change without notice.
         ⬦C Falls within JEDEC MS−001, except 18 and 20 pin minimum body length (Dim A).
         ⬦D The 20 pin end lead shoulder width is a vendor option, either half or full width.

D (R−PDSO−G16)   PLASTIC SMALL OUTLINE

0.394 (10,00)
0.386 (9,80)
△C

16   9

0.244 (6,20)
0.228 (5,80)

0.157 (4,00)
0.150 (3,80) △D

1   8

Pin 1
Index Area

0.050 (1,27)

0.020 (0,51)
0.012 (0,31)

⊕ 0.010 (0,25) Ⓜ

0.069 (1,75) Max

0.010 (0,25)
0.004 (0,10)

0.010 (0,25)
0.005 (0,13)

0.004 (0,10)

Gauge Plane

Seating Plane

0.010 (0,25)   0°−8°

0.050 (1,27)
0.016 (0,40)

4040047−6/M 06/11

NOTES: A.   All linear dimensions are in inches (millimeters).
         B.   This drawing is subject to change without notice.
         △C   Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall
              not exceed 0.006 (0,15) each side.
         △D   Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
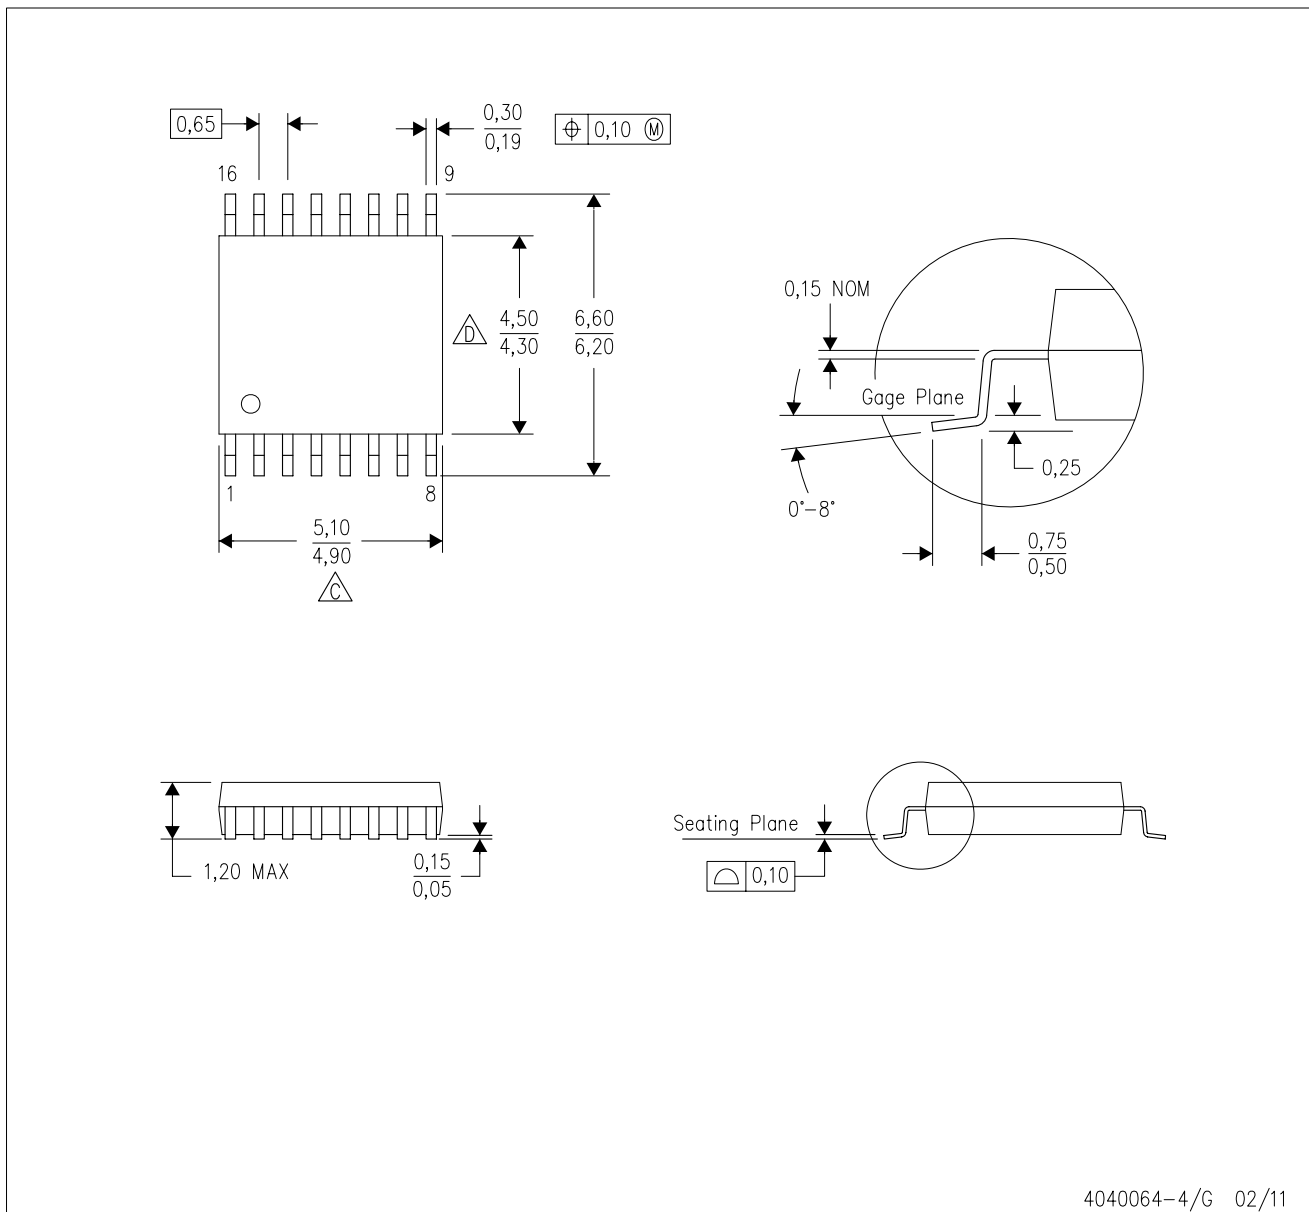   E.   Reference JEDEC MS−012 variation AC.

TEXAS INSTRUMENTS
www.ti.com

D (R−PDSO−G16)   PLASTIC SMALL OUTLINE

Example Board Layout
(Note C)

14x1,27

5,40

Stencil Openings
(Note D)

16x0,55

14x1,27

16x1,50

5.40

Example
Non Soldermask Defined Pad

Example
Pad Geometry
(See Note C)

0,60

1,55

Example
Solder Mask Opening
(See Note E)

0,07

All Around

4211283−4/E 08/12

NOTES: A.   All linear dimensions are in millimeters.
            B.   This drawing is subject to change without notice.
            C.   Publication IPC−7351 is recommended for alternate designs.
            D.   Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should
                 contact their board assembly site for stencil design recommendations. Refer to IPC−7525 for other stencil recommendations.
            E.   Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.
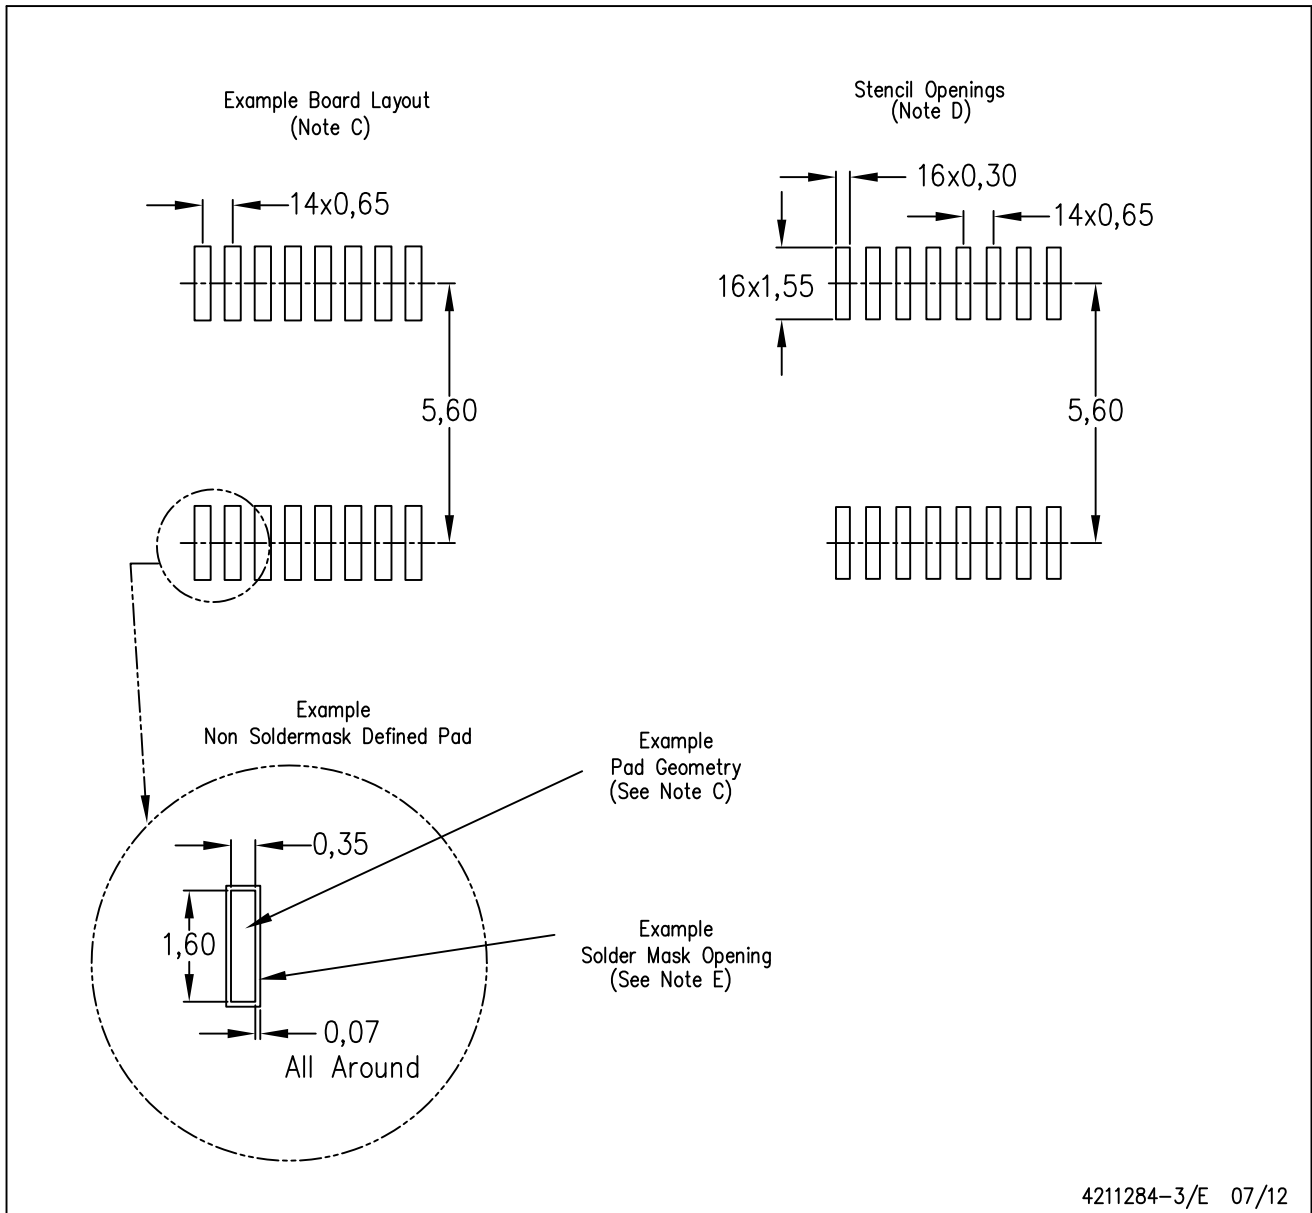
PW (R−PDSO−G16)   PLASTIC SMALL OUTLINE

0,65

0,30
0,19

⊕ 0,10 Ⓜ

16   9

D 4,50
   4,30

6,60
6,20

1   8

5,10
4,90

Ⓒ

0,15 NOM

Gage Plane

0°−8°

0,25

0,75
0,50

1,20 MAX

0,15
0,05

Seating Plane

⌒ 0,10

4040064−4/G 02/11

NOTES: A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M−1994.
         B. This drawing is subject to change without notice.
        Ⓒ Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall
             not exceed 0,15 each side.
        Ⓓ Body width does not include interlead flash. Interlead flash shall not exceed 0,25 each side.
         E. Falls within JEDEC MO−153

TEXAS INSTRUMENTS
www.ti.com

PW (R−PDSO−G16)   PLASTIC SMALL OUTLINE

Example Board Layout
(Note C)

14x0,65

5,60

Stencil Openings
(Note D)

16x0,30

14x0,65

16x1,55

5,60

Example
Non Soldermask Defined Pad

Example
Pad Geometry
(See Note C)

0,35

1,60

0,07
All Around

Example
Solder Mask Opening
(See Note E)

4211284−3/E 07/12

NOTES: A. All linear dimensions are in millimeters.
          B. This drawing is subject to change without notice.
          C. Publication IPC−7351 is recommended for alternate designs.
          D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should
              contact their board assembly site for stencil design recommendations. Refer to IPC−7525 for other stencil recommendations.
          E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

TEXAS
INSTRUMENTS
www.ti.com

MECHANICAL DATA

PLASTIC SMALL-OUTLINE PACKAGE

14-PINS SHOWN

DIM \ PINS **	14	16	20	24
A MAX	10,50	10,50	12,90	15,30
A MIN	9,90	9,90	12,30	14,70

4040062/C 03/03

NOTES: A. All linear dimensions are in millimeters.
          B. This drawing is subject to change without notice.
          C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46C and to discontinue any product or service per JESD48B. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have *not* been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components which meet ISO/TS16949 requirements, mainly for automotive use. Components which have not been so designated are neither designed nor intended for automotive use; and TI will not be responsible for any failure of such components to meet such requirements.

Products		**Applications**	
Audio	www.ti.com/audio	Automotive and Transportation	www.ti.com/automotive
Amplifiers	amplifier.ti.com	Communications and Telecom	www.ti.com/communications
Data Converters	dataconverter.ti.com	Computers and Peripherals	www.ti.com/computers
DLP® Products	www.dlp.com	Consumer Electronics	www.ti.com/consumer-apps
DSP	dsp.ti.com	Energy and Lighting	www.ti.com/energy
Clocks and Timers	www.ti.com/clocks	Industrial	www.ti.com/industrial
Interface	interface.ti.com	Medical	www.ti.com/medical
Logic	logic.ti.com	Security	www.ti.com/security
Power Mgmt	power.ti.com	Space, Avionics and Defense	www.ti.com/space-avionics-defense
Microcontrollers	microcontroller.ti.com	Video and Imaging	www.ti.com/video
RFID	www.ti-rfid.com		
OMAP Mobile Processors	www.ti.com/omap	**TI E2E Community**	e2e.ti.com
Wireless Connectivity	www.ti.com/wirelessconnectivity		

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2012, Texas Instruments Incorporated