Winchester Servo Preamplifier with Low Current Drain

The CS59201 is a low noise servo preamplifier for use with ferrite heads. It is a differential input, differential output design with fixed gain of approximately 100. Features include low noise, wide bandwidth and low current drain.

Features

- 50 MHz Bandwidth
- Operates From Any of Three Standard Supply Voltages:
 - 8.3 V (IBM Compatible)
 - 10 V
 - 12 V
- Available in SO-8 Package




Figure 1. Block Diagram




ON Semiconductor™

http://onsemi.com



SO-8 D SUFFIX CASE 751

PIN CONNECTION AND MARKING DIAGRAM



= Assembly Location

WL, L = Wafer Lot YY, Y = Year WW, W = Work Week

ORDERING INFORMATION

Device	Package	Shipping		
CS59201GD8	SO-8	95 Units/Rail		
CS59201GDR8	SO-8	2500 Tape & Reel		

CS59201

MAXIMUM RATINGS*

Rating	Value	Unit
Power Supply Voltage (V _{CC} – V _{EE})	14	V
Differential Input Voltage	5.0	V
Storage Temperature Range	-65 to +150	°C
Operating Temperature Range	0 to 70	°C
Thermal Resistance, Junction–to–Case, R _{⊖JC}	45	°C/W
Thermal Resistance, Junction-to-Ambient, R _{⊖JA}	165	°C/W
ESD Susceptibility (Human Body Model)	1.4	kV

^{*}The maximum package power dissipation must be observed.

ELECTRICAL CHARACTERISTICS $(T_A = 25^{\circ}C, (V_{CC} - V_{EE}) = 7.0 \text{ V to } 13.2 \text{ V; unless otherwise specified.})$

Characteristic	Test Conditions	Min	Тур	Max	Unit
General				P	
Gain (Differential)	-	80	100	120	V/V
Bandwidth (3.0 dB)	V _{IN} = 2.0 mV	30	50	_	MHz
Input Resistance	-	1040	1300	1560	Ω
Input Capacitance	-	()- (20	30	pF
Input Dynamic Range		3.0		_	mV
Power Supply Current	(V _{CC} - V _{EE}) = 12 V		20	25	mA
Output Offset (Differential)	$R_S = 0, R_L = 130 \Omega$	9 20	_	200	mV
Equivalent Input Noise	BW = 4.0 MHz, Note 1	19	0.7	1.0	nV/Hz
PSRR, Input Referred	R _S = 0, f ≤ 5.0 MHz, Note 1	55	60	_	dB
Gain Sensitivity (Supply)	$(V_{CC} - V_{EE}) = \pm 10\%$	-	-	±0.5	%/V
Gain Sensitivity (Temp.)	T_A = 25°C to 70°C, R_L = 130 Ω	-	-0.1	_	%/°C
CMRR, Input Referred	f ≤ 5.0 MHz	60	70	_	dB
Recommended	الم م الله			•	•
Supply Voltage (V _{CC} - V _{EE})	4, 4, 4,	7.45	8.3	9.15	V
	OFCIF	9.0 10.8	10 12	11 13.2	V
	C .5	10.0		10.2	-
Input Signal, V _{IN}	-	-	2.0	-	mV _{PP}
Ambient Temperature, T _A		0	_	70	°C

^{1. 1.0} nV/root Hz and a bandwidth of 4.0 MHz equals 2.0 $\mu\text{VRMS}.$

PACKAGE PIN DESCRIPTION

Pin Number		
SO-8	Pin Symbol	Function
1	IN+	Positive input to preamplifier.
2	IN-	Negative input to preamplifier.
3, 8	NC	No connection.
4	V _{EE}	Negative supply voltage.
5	OUT+	One of the amplifier outputs.
6	OUT-	One of the amplifier outputs.
7	Vcc	Positive supply voltage.

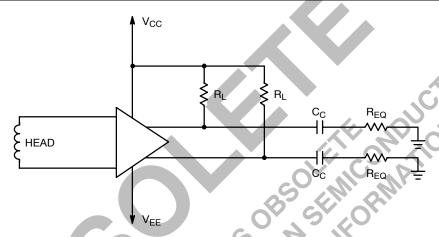


Figure 2. Applications Diagram


Recommended Load Conditions

- 1. Input must be AC coupled.
- 2. C_C's are AC coupling capacitors.
- 3. R_L 's are DC bias and termination resistors, (recommended 130 Ω).
- 4. R_{EQ} represents equivalent load resistance.
- 5. For gain calculations $R_P = (R_L \times R_{EQ})/(R_L + R_{EQ})$.
- 6. Differential gain = 0.72 R_P ($\pm 18\%$)(R_P in Ω).
- 7. Ceramic capacitors (0.1 μF) are recommended for good power supply noise filtering.

CS59201

PACKAGE DIMENSIONS

SO-8 D SUFFIX CASE 751-07 **ISSUE W**

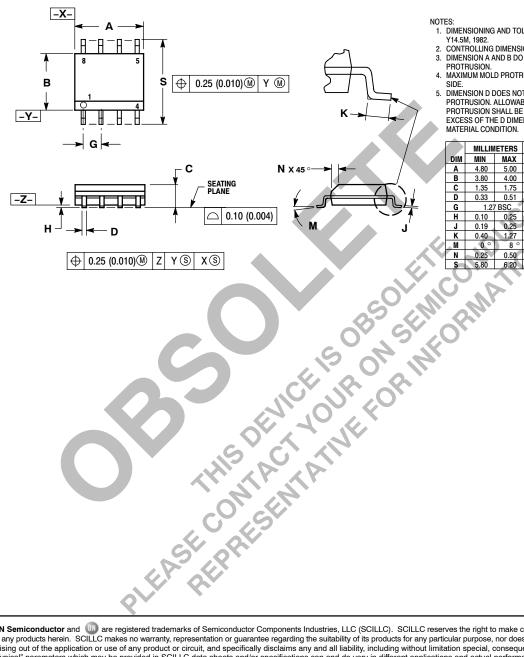

NOTES:

- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
- CONTROLLING DIMENSION: MILLIMETER.
 DIMENSION A AND B DO NOT INCLUDE MOLD PROTRUSION.

 4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER
- 5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
Α	4.80	5.00	0.189	0.197
В	3.80	4.00	0.150	0.157
С	1.35	1.75	0.053	0.069
D	0.33	0.51	0.013	0.020
G	1.27 BSC		0.050 BSC	
Н	0.10	0.25	0.004	0.010
J	0.19	0.25	0.007	0.010
K	0.40	1.27	0.016	0.050
M	0 °	8 °	0 °	8 °
N	0.25	0.50	0.010	0.020
S	5.80	6.20	0 228	0 244

ON Semiconductor and un are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor P.O. Box 5163, Denver, Colorado 80217 USA

Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free USA/Canada

Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81-3-5773-3850

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative