

6DQ6-A-12DQ6-A-17DQ6-A

BEAM PENTODE

6DQ6-A 12DQ6-A 17DQ6-A ET-T1449 Page 1

FOR TV HORIZONTAL-DEFLECTION AMPLIFIER APPLICATIONS

DESCRIPTION AND RATING =

The 6DQ6-A is a beam-power pentode primarily designed for use as the horizontal-deflection amplifier in television receivers. Its high zero-bias plate current at low plate and screen voltages makes the tube well suited for use in receivers which operate at low plate-supply voltages.

Except for heater ratings, the 12DQ6-A and 17DQ6-A are identical to the 6DQ6-A. In addition, they incorporate a controlled heater warm-up characteristic which makes them especially suited for use in television receivers that employ series-connected heaters.

GENERAL


ELECTRICAL

Cathode—Coated Unipotential	6DQ6-A	12DQ6-A	17DQ6-	A			
Heater Voltage, AC or DC	6.3	12.6	16.8	Volts			
Heater Current	1.2	0.6	0.45	Amperes			
Heater Warm-up Time*		11	11	Seconds			
Direct Interelectrode Capacitances, approximate†							
Grid-Number 1 to Plate			0.55	$\mu\muf$			
Input			15	$\mu\mu$ f			
Output			7. 0	$\mu\mu$ f			

MECHANICAL

Mounting Position—Any
Envelope—T-12, Glass
Base—B7-119, Short Medium-Shell Octal 7-Pin
Top Cap—C1-3, Skirted Miniature

BASING DIAGRAM



RETMA 6AM

TERMINAL CONNECTIONS

Pin 1—No Connection

Pin 2—Heater

Pin 3—No Connection

Pin 4—Grid Number 2 (Screen)


Pin 5—Grid Number 1

Pin 7—Heater

Pin 8—Cathode and Beam
Plates

Cap-Plate

PHYSICAL DIMENSIONS





MAXIMUM RATINGS

HORIZONTAL-DEFLE	CTION AMPLIF	IER SERVICE	
DESIGN-CENTER V	ALUES UNLESS	OTHERWISE	INDICATED

Pasient-delities Theore differential Higherita		
DC Plate-Supply Voltage (Boost+DC Power Supply)	700	Volts
Peak Positive Pulse Plate Voltage	6000§	Volts
Peak Negative Pulse Plate Voltage	1375	Volts
Screen Voltage	200	Volts
Negative DC Grid-Number 1 Voltage	5 0	Volts
Peak Negative Grid-Number 1 Voltage	300	Volts
Plate Dissipation 🛆	15	Watts
Screen Dissipation	3.0	Watts
DC Cathode Current	140	Milliamperes
Peak Cathode Current	440	Milliamperes
Heater-Cathode Voltage		
Heater Positive with Respect to Cathode		
DC Component		Volts
Total DC and Peak	200	Volts
Heater Negative with Respect to Cathode		
Total DC and Peak	200	Volts
Grid-Number 1 Circuit Resistance		
With Grid-Leak Bias	1.0	Megohms
Bulb Temperature at Hottest Point	220	С

CHARACTERISTICS AND TYPICAL OPERATION


AVERAGE CHARACTERISTICS


Plate Voltage	250	Volts
Screen Voltage	150	Volts
Grid-Number 1 voltage	-22.5	Volts
Plate Resistance, approximate	20000	Ohms
Transconductance	6600	Micromhos
Plate Current	75	Milliamperes
Screen Current	2.4	Milliamperes
Grid-Number 1 Voltage, approximate		•
lb = 1.0 Milliampere		Volts
Triode Amplification Factor♦	4.1	


* The time required for the voltage across the heater to reach 80 percent of its rated value after applying 4 times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to 3 times the rated heater voltage divided by the rated heater current.

† Without external shield.

- ‡ For operation in a 525-line, 30-frame television system as described in "Standards of Good Engineering Practice Concerning Television Broadcast Stations," Federal Communications Commission. The duty cycle of the voltage pulse must not exceed 15 percent of one scanning cycle.
- § Value given is to be considered as an Absolute Maximum Rating. In this case, the combined effect of supply voltage variation, manufacturing variation including components in the equipment, and adjustment of equipment controls should not cause the rated value to be exceeded.
- \triangle In stages operating with grid-leak bias, an adequate cathode-bias resistor or other suitable means is required to protect the tube in the absence of excitation.
- ¶ Applied for short interval (2 seconds maximum) so as not to damage tube.
- \blacklozenge Triode connection (screen tied to plate) with Eb = Ec2 = 150 volts, and Ecl = -22.5 volts.

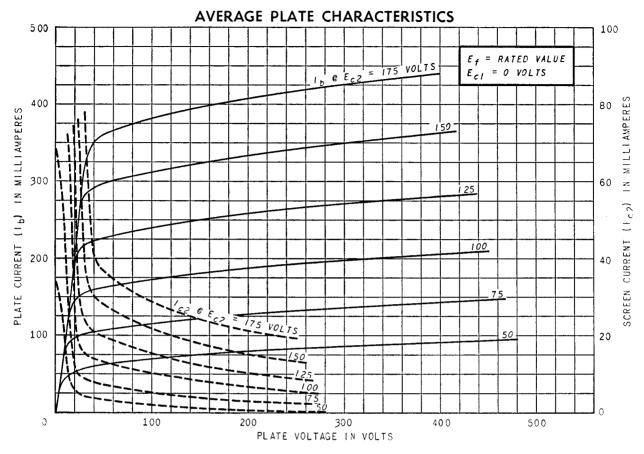

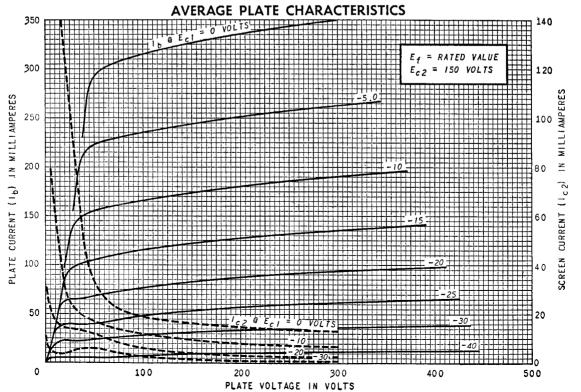


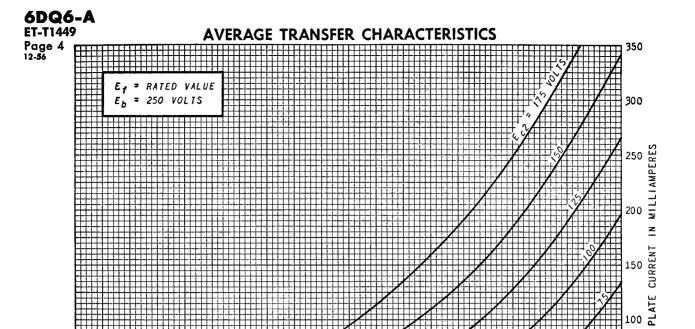

GRID-NUMBER 1 VOLTAGE IN VOLTS

AVERAGE TRANSFER CHARACTERISTICS

-50

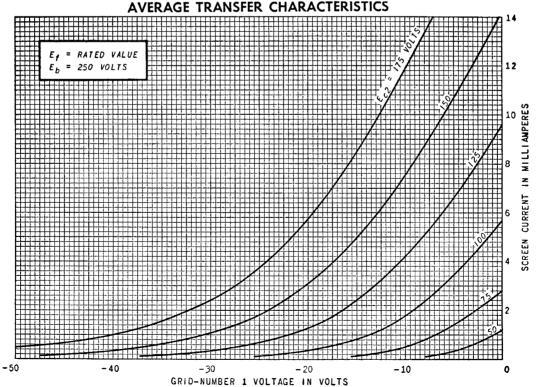

ELECTRONIC COMPONENTS DIVISION



Schenectady 5, N. Y.

50

-10