


Silicon PNP HF Transistor


Applications

RF-IF amplifier specially for thick and thin film circuits.

Features

- High power gain
- Low noise figure





BF550 Marking: LA Plastic case (SOT 23) 1= Collector; 2= Base; 3= Emitter

BF550R Marking: G5 Plastic case (SOT 23) 1= Collector; 2= Base; 3= Emitter

Absolute Maximum Ratings

Parameters	Symbol	Value	Unit
Collector-base voltage	-V _{CBO}	40	V
Collector-emitter voltage	-V _{CEO}	40	V
Emitter-base voltage	-V _{EBO}	4	V
Collector current	-I _C	25	mA
Total power dissipation $T_{amb} \le 60^{\circ}C$	P _{tot}	200	mW
Junction temperature	Tj	125	°C

Maximum Thermal Resistance

Parameters	Symbol	Value	Unit
Junction ambient on glass fibre printed board (25 x 20 x 15) mm ³ plated with 35 µm Cu	R _{thJA}	450	K/W

Electrical DC Characteristics

 $T_{amb} = 25^{\circ}C$, unless otherwise specified

Parameters / Test Conditions	Symbol	Min.	Тур.	Max.	Unit
Collector-emitter cut-off current $-V_{CE} = 40, V_{BE} = 0$	-I _{CES}			100	μΑ
Collector-base cut-off current $-V_{CB} = 10 \text{ V}, I_E = 0$	-I _{CBO}			100	nA
Emitter-base cut-off current $-V_{EB} = 4 \text{ V}, I_{C} = 0$	-I _{EBO}			10	μΑ
Collector-emitter breakdown voltage $-I_C = 1 \text{ mA}, I_B = 0$	-V _{(BR)CEO}	40			v
DC forward current transfer ratio $-V_{CE} = 10 \text{ V}, -I_{C} = 1 \text{ mA}$	h _{FE}	50	80	125	


Electrical AC Characteristics

 $T_{amb} = 25^{\circ}C$

Parameters / Test Conditions	Symbol	Min.	Тур.	Max.	Unit
Transition frequency $-V_{CE} = 10 \text{ V}, -I_{C} = 1 \text{ mA}, \text{ f} = 100 \text{ MHz}$	f _T		350		MHz
Collector-base capacitance $-V_{CB} = 10 \text{ V}, \text{ f} = 1 \text{ MHz}$	C _{cb}		0.35		pF
Feedback capacitance $-V_{CE} = 10 \text{ V}, -I_{C} = 1 \text{ mA}, \text{ f} = 100 \text{ MHz}$	C _{re}		0.5		pF
Noise figure $-V_{CE} = 10 \text{ V}, -I_{C} = 2 \text{ mA}, Z_{S} = 50 \Omega,$ f = 100 MHz	F		3.4		dB




Dimensions of BF550 in mm

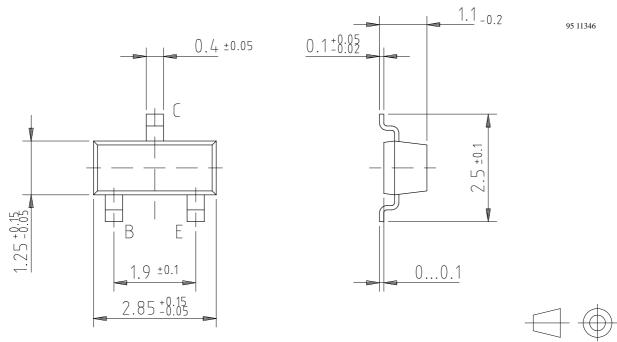


technical drawings according to DIN specifications

95 11347

Dimensions of BF550R in mm







technical drawings according to DIN specifications

TELEFUNKEN Semiconductors Rev. A1, 15-Apr-96

BF550/BF550R

Ozone Depleting Substances Policy Statement

It is the policy of TEMIC TELEFUNKEN microelectronic GmbH to

- 1. Meet all present and future national and international statutory requirements.
- 2. Regularly and continuously improve the performance of our products, processes, distribution and operating systems with respect to their impact on the health and safety of our employees and the public, as well as their impact on the environment.

It is particular concern to control or eliminate releases of those substances into the atmosphere which are known as ozone depleting substances (ODSs).

The Montreal Protocol (1987) and its London Amendments (1990) intend to severely restrict the use of ODSs and forbid their use within the next ten years. Various national and international initiatives are pressing for an earlier ban on these substances.

TEMIC TELEFUNKEN microelectronic GmbH semiconductor division has been able to use its policy of continuous improvements to eliminate the use of ODSs listed in the following documents.

- 1. Annex A, B and list of transitional substances of the Montreal Protocol and the London Amendments respectively
- 2. Class I and II ozone depleting substances in the Clean Air Act Amendments of 1990 by the Environmental Protection Agency (EPA) in the USA
- 3. Council Decision 88/540/EEC and 91/690/EEC Annex A, B and C (transitional substances) respectively.

TEMIC can certify that our semiconductors are not manufactured with ozone depleting substances and do not contain such substances.

We reserve the right to make changes to improve technical design and may do so without further notice. Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer. Should the buyer use TEMIC products for any unintended or unauthorized application, the buyer shall indemnify TEMIC against all claims, costs, damages, and expenses, arising out of, directly or indirectly, any claim of personal damage, injury or death associated with such unintended or unauthorized use.

TEMIC TELEFUNKEN microelectronic GmbH, P.O.B. 3535, D-74025 Heilbronn, Germany Telephone: 49 (0)7131 67 2831, Fax number: 49 (0)7131 67 2423