



# MSC80196

# RF & MICROWAVE TRANSISTORS GENERAL PURPOSE LINEAR APPLICATIONS

- EMITTER BALLASTED
- CLASS A LINEAR OPERATION
- COMMON EMITTER
- VSWR CAPABILITY 15:1 @ RATED CONDITIONS
- ft 3.2 GHz TYPICAL
- NOISE FIGURE 12.5 dB @ 2 GHz
- Pout = 30.0 dBm MIN.

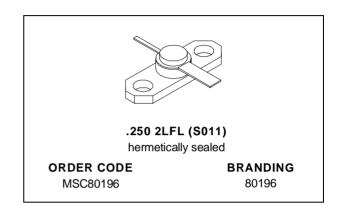

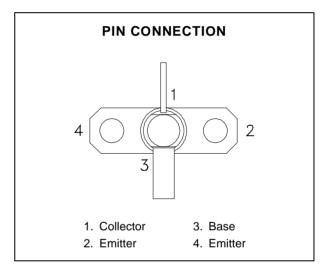

#### **DESCRIPTION**

The MSC80196 is a hermetically sealed NPN power transistor featuring a unique matrix structure. This device is specifically designed for Class A linear applications to provide high gain and high output power at the 1.0 dB compression point.

#### **ABSOLUTE MAXIMUM RATINGS** (T<sub>case</sub> = 25°C)

Symbol	Parameter	Value	Unit	
P <sub>DISS</sub>	Power Dissipation (see Safe Area)	_	W	
Ic	Device Bias Current	500	mA	
V <sub>CE</sub>	Collector-Emitter Bias Voltage*	20	V	
TJ	Junction Temperature	200	°C	
T <sub>STG</sub>	Storage Temperature	- 65 to +200	°C	

#### THERMAL DATA

D-11/1	Junction Cose Thermal Posistance*	17	°C/W
RTH(j-c)	Junction-Case Thermal Resistance*	17	C/VV

<sup>\*</sup>Applies only to rated RF amplifier operation

October 1992 1/6

## **ELECTRICAL SPECIFICATIONS** (T<sub>case</sub> = 25°C)

### **STATIC**

Symbol	Test Conditions	Value			11		
		Min.	Тур.	Max.	Unit		
ВУсво	$I_C = 1mA$	$I_E = 0mA$		50	_		V
BV <sub>EBO</sub>	I <sub>E</sub> = 1mA	I <sub>C</sub> = 0mA		3.5	_	_	V
BVceo	IC = 5mA	$I_B = 0mA$		20	_	_	V
ICEO	V <sub>CE</sub> = 18V			-	_	1.0	mA
hFE	V <sub>CE</sub> = 5V	I <sub>C</sub> = mA		15	_	120	_


## **DYNAMIC**

Symbol	Test Conditions			Value		Unit	
Symbol				Min.	Тур.	Max.	Unit
G <sub>P</sub> *	f = 2.0 GHz	$P_{OUT} = 30.0 \text{ dBm}$		7.0	9.0	_	dB
$\Delta G_P^*$	f = 2.0 GHz	$P_{OUT} = 30.0 \text{ dBm}$	$\Delta P_{OUT} = 10 \text{ dB}$	_		1	dB
СОВ	f = 1 MHz	V <sub>CB</sub> = 28 V		_		5.0	pF


\* Note:  $V_{CE} = 18V$  $I_{C} = 220 \text{mA}$ 

#### TYPICAL PERFORMANCE




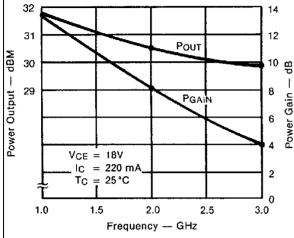


# TYPICAL POWER OUTPUT & GAIN @ 1dB COMPRESSION POINT vs COLLECTOR CURRENT

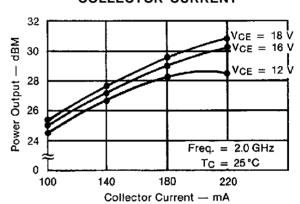


# MAXIMUM OPERATING AREA FOR FORWARD BIAS OPERATION

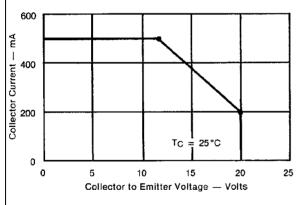


# TYPICAL LINEAR GAIN vs

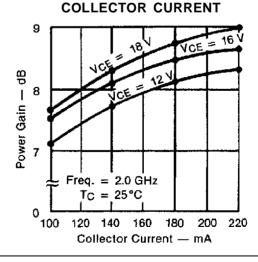


## TYPICAL S-PARAMETERS

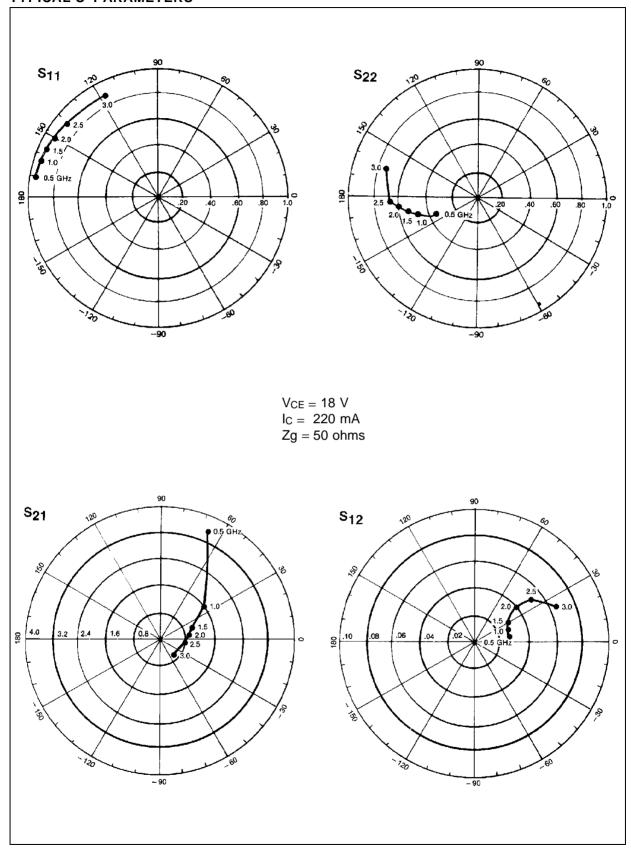

#### **TEST CIRCUIT**

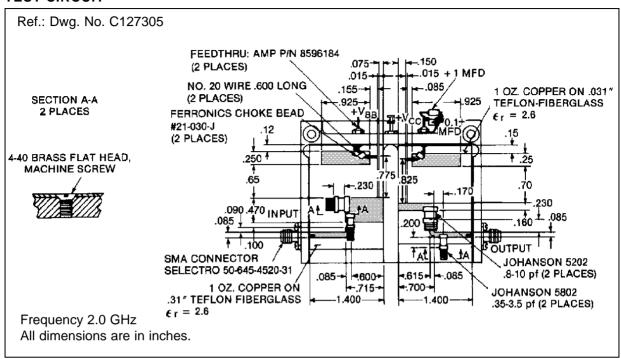

#### **PACKAGE MECHANICAL DATA**

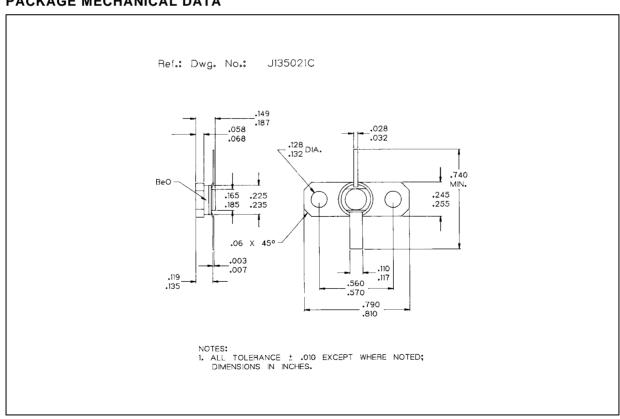

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsability for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may results from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectonics.

© 1994 SGS-THOMSON Microelectronics - All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES

Australia - Brazil - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A

