
# **DISCRETE SEMICONDUCTORS**

# DATA SHEET



# **PBSS4350T** 50 V low V<sub>CEsat</sub> NPN transistor

**Product specification** 





**Philips Semiconductors** 

# 50 V low V<sub>CEsat</sub> NPN transistor

# **PBSS4350T**

### **FEATURES**

- Low collector-emitter saturation voltage V<sub>CEsat</sub> and corresponding low R<sub>CEsat</sub>
- · High collector current capability
- High collector current gain
- Improved efficiency due to reduced heat generation.

## **APPLICATIONS**

- · Power management applications
- Low and medium power DC/DC convertors
- · Supply line switching
- · Battery chargers
- Linear voltage regulation with low voltage drop-out (LDO).

## **DESCRIPTION**

NPN low  $V_{\text{CEsat}}$  transistor in a SOT23 plastic package. PNP complement: PBSS5350T.

## **MARKING**

TYPE NUMBER	MARKING CODE <sup>(1)</sup>
PBSS4350T	ZC*

### Note

- 1. \* = p: Made in Hong Kong.
  - \* = t: Made in Malaysia.
  - \* = w: Made in China.


### **QUICK REFERENCE DATA**

SYMBOL	PARAMETER	MAX.	UNIT
V <sub>CEO</sub>	collector-emitter voltage	50	V
I <sub>C</sub>	collector current (DC)	2	Α
I <sub>CRP</sub>	repetitive peak collector current	3	А
R <sub>CEsat</sub>	equivalent on-resistance	130	mΩ

#### **PINNING**

2

PIN	DESCRIPTION				
1	base				
2	emitter				
3	collector				

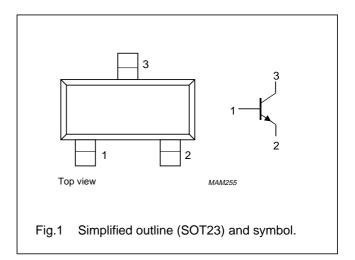

# 50 V low V<sub>CEsat</sub> NPN transistor

PBSS4350T

### **LIMITING VALUES**

In accordance with the Absolute Maximum Rating System (IEC 60134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V <sub>CBO</sub>	collector-base voltage	open emitter	_	50	V
V <sub>CEO</sub>	collector-emitter voltage	open base	_	50	V
V <sub>EBO</sub>	emitter-base voltage	open collector	_	5	V
I <sub>C</sub>	collector current (DC)		_	2	А
I <sub>CRP</sub>	repetitive peak collector current	note 1	_	3	Α
I <sub>CM</sub>	peak collector current	peak collector current single peak		5	Α
I <sub>B</sub>	base current (DC)		_	0.5	А
P <sub>tot</sub>	total power dissipation	T <sub>amb</sub> ≤ 25 °C; note 2	_	300	mW
		T <sub>amb</sub> ≤ 25 °C; note 3	_	480	mW
		T <sub>amb</sub> ≤ 25 °C; note 4	_	540	mW
		T <sub>amb</sub> ≤ 25 °C; notes 1 and 2	_	1.2	W
T <sub>stg</sub>	storage temperature		-65	+150	°C
Tj	junction temperature		_	150	°C
T <sub>amb</sub>	operating ambient temperature		-65	+150	°C

### **Notes**

- 1. Operated under pulsed conditions: pulse width  $t_p \le 100$  ms; duty cycle  $\delta \le 0.25$ .
- 2. Device mounted on a printed-circuit board; single sided copper; tinplated; standard footprint.
- 3. Device mounted on a printed-circuit board; single sided copper; tinplated; mounting pad for collector 1 cm<sup>2</sup>.
- 4. Device mounted on a printed-circuit board; single sided copper; tinplated; mounting pad for collector 6 cm<sup>2</sup>.

### THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
R <sub>th j-a</sub>	thermal resistance from junction to	in free air; note 1	417	K/W
	ambient	in free air; note 2	260	K/W
		in free air; note 3	230	K/W
		in free air; notes 1 and 4	104	K/W

#### **Notes**

- Device mounted on a printed-circuit board; single sided copper; tinplated; standard footprint.
- 2. Device mounted on a printed-circuit board; single sided copper; tinplated; mounting pad for collector 1 cm<sup>2</sup>.
- 3. Device mounted on a printed-circuit board; single sided copper; tinplated; mounting pad for collector 6 cm<sup>2</sup>.
- 4. Operated under pulsed conditions: pulse width  $t_p \le 100$  ms; duty cycle  $\delta \le 0.25$ .

# 50 V low $V_{\text{CEsat}}$ NPN transistor

PBSS4350T

# **CHARACTERISTICS**

 $T_{amb}$  = 25 °C unless otherwise specified.


SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
I <sub>CBO</sub>	collector-base cut-off current	V <sub>CB</sub> = 50 V; I <sub>E</sub> = 0	_	_	100	nA
		V <sub>CB</sub> = 50 V; I <sub>E</sub> = 0; T <sub>j</sub> = 150 °C	_	_	50	μΑ
I <sub>EBO</sub>	emitter-base cut-off current	V <sub>EB</sub> = 5 V; I <sub>C</sub> = 0	_	_	100	nA
h <sub>FE</sub>	DC current gain	V <sub>CE</sub> = 2 V; I <sub>C</sub> = 100 mA	300	_	_	
		V <sub>CE</sub> = 2 V; I <sub>C</sub> = 500 mA	300	-	_	
		V <sub>CE</sub> = 2 V; I <sub>C</sub> = 1 A; note 1	300	_	_	
		V <sub>CE</sub> = 2 V; I <sub>C</sub> = 2 A; note 1	200	_	_	
		V <sub>CE</sub> = 2 V; I <sub>C</sub> = 3 A; note 1	100	-	_	
V <sub>CEsat</sub>	collector-emitter saturation voltage	I <sub>C</sub> = 500 mA; I <sub>B</sub> = 50 mA	_	_	80	mV
		I <sub>C</sub> = 1 A; I <sub>B</sub> = 50 mA	_	_	160	mV
		I <sub>C</sub> = 2 A; I <sub>B</sub> = 100 mA; note 1	_	_	280	mV
		I <sub>C</sub> = 2 A; I <sub>B</sub> = 200 mA; note 1	_	_	260	mV
		I <sub>C</sub> = 3 A; I <sub>B</sub> = 300 mA; note 1	_	_	370	mV
R <sub>CEsat</sub>	equivalent on-resistance	I <sub>C</sub> = 2 A; I <sub>B</sub> = 200 mA; note 1	_	100	130	mΩ
V <sub>BEsat</sub>	base-emitter saturation	I <sub>C</sub> = 2 A; I <sub>B</sub> = 100 mA; note 1	_	_	1.1	V
	voltage	I <sub>C</sub> = 3 A; I <sub>B</sub> = 300 mA; note 1	_	-	1.2	V
$V_{BEon}$	base-emitter turn-on voltage	V <sub>CE</sub> = 2 V; I <sub>C</sub> = 1 A; note 1	1.2	_	_	V
f <sub>T</sub>	transition frequency	I <sub>C</sub> = 100 mA; V <sub>CE</sub> = 5 V; f = 100 MHz	100	_	_	MHz
C <sub>c</sub>	collector capacitance	$V_{CB} = 10 \text{ V}; I_E = I_e = 0; f = 1 \text{ MHz}$	_	_	25	pF

# Note

1. Pulse test:  $t_p \le 300~\mu s;~\delta \le 0.02.$ 

# 50 V low V<sub>CEsat</sub> NPN transistor


**PBSS4350T** 



 $V_{CE} = 2 V$ .

- (1)  $T_{amb} = 150 \, ^{\circ}C$ .
- (2)  $T_{amb} = 25 \, ^{\circ}C$ .
- (3)  $T_{amb} = -55 \, ^{\circ}C$ .


Fig.2 DC current gain as a function of collector current; typical values.



 $V_{CE} = 2 V$ .

- (1)  $T_{amb} = -55 \, ^{\circ}C$ .
- (2)  $T_{amb} = 25 \, ^{\circ}C$ .
- (3)  $T_{amb} = 150 \, ^{\circ}C$ .


Fig.3 Base-emitter voltage as a function of collector current; typical values.



 $I_C/I_B = 10$ .

- (1)  $T_{amb} = -55 \, ^{\circ}C$ .
- (2)  $T_{amb} = 25 \, ^{\circ}C$ .
- (3)  $T_{amb} = 150 \, ^{\circ}C$ .

Fig.4 Base-emitter saturation voltage as a function of collector current; typical values.



 $I_{\rm C}/I_{\rm B} = 20$ .

5

- (1)  $T_{amb} = -55 \, ^{\circ}C$ .
- (2)  $T_{amb} = 25 \, ^{\circ}C$ .
- (3)  $T_{amb} = 150 \, ^{\circ}C$ .

Fig.5 Base-emitter saturation voltage as a function of collector current; typical values.

# 50 V low V<sub>CEsat</sub> NPN transistor

# **PBSS4350T**



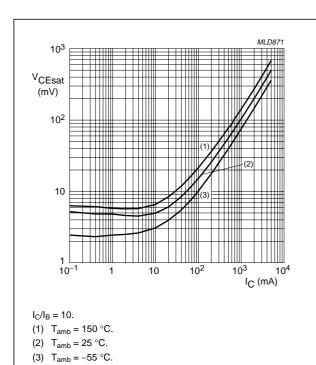


Fig.6 Collector-emitter saturation voltage as a function of collector current; typical values.



(1)  $T_{amb} = 150 \,^{\circ}\text{C}$ . (2)  $T_{amb} = 25 \,^{\circ}\text{C}$ . (3)  $T_{amb} = -55 \,^{\circ}\text{C}$ .

Fig.7 Collector-emitter saturation voltage as a function of collector current; typical values.




 $I_{\rm C}/I_{\rm B} = 50.$ 

(1) T<sub>amb</sub> = 150 °C.

(2)  $T_{amb} = 25 \, ^{\circ}C$ .

(3)  $T_{amb} = -55 \, ^{\circ}C$ .

Fig.8 Collector-emitter saturation voltage as a function of collector current; typical values.



 $I_{\rm C}/I_{\rm B} = 100.$ 

(1)  $T_{amb} = 150 \, ^{\circ}C$ .


(2)  $T_{amb} = 25 \, ^{\circ}C$ .

(3)  $T_{amb} = -55 \, ^{\circ}C$ .

Fig.9 Collector-emitter saturation voltage as a function of collector current; typical values.

# 50 V low $V_{\text{CEsat}}$ NPN transistor

PBSS4350T



- (1)  $T_{amb} = 150 \, ^{\circ}C$ .
- (2)  $T_{amb} = 25 \,^{\circ}C$ .
- (3)  $T_{amb} = -55 \, ^{\circ}C$ .

Fig.10 Equivalent on-resistance as a function of collector current; typical values.


# 50 V low $V_{\text{CEsat}}$ NPN transistor

PBSS4350T

# **PACKAGE OUTLINE**

Plastic surface mounted package; 3 leads

SOT23

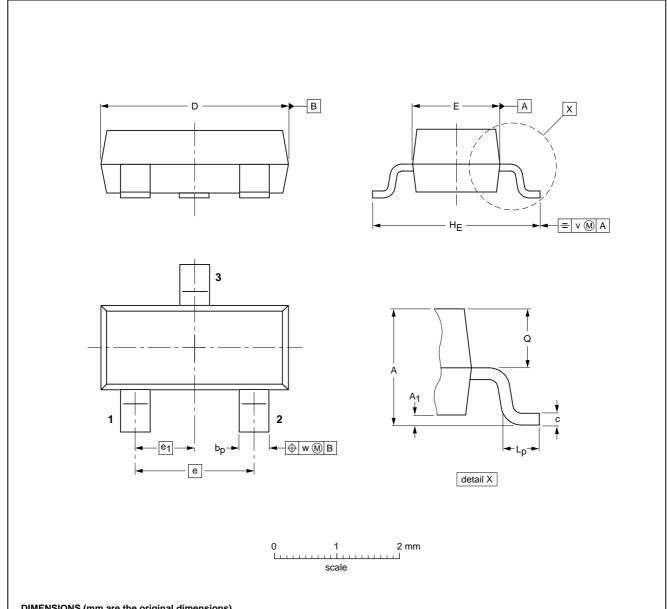

## **DIMENSIONS** (mm are the original dimensions)

UNIT	Α	A <sub>1</sub> max.	bp	С	D	E	е	e <sub>1</sub>	HE	L <sub>p</sub>	Q	v	w
mm	1.1 0.9	0.1	0.48 0.38	0.15 0.09	3.0 2.8	1.4 1.2	1.9	0.95	2.5 2.1	0.45 0.15	0.55 0.45	0.2	0.1

OUTLINE	REFERENCES					ISSUE DATE	
VERSION	IEC	JEDEC	EIAJ		PROJECTION	ISSUE DATE	
SOT23		TO-236AB				<del>-97-02-28-</del> 99-09-13	

# 50 V low V<sub>CEsat</sub> NPN transistor

PBSS4350T

#### **DATA SHEET STATUS**

DATA SHEET STATUS(1)	PRODUCT STATUS <sup>(2)</sup>	DEFINITIONS
Objective data	Development	This data sheet contains data from the objective specification for product development. Philips Semiconductors reserves the right to change the specification in any manner without notice.
Preliminary data	Qualification	This data sheet contains data from the preliminary specification. Supplementary data will be published at a later date. Philips Semiconductors reserves the right to change the specification without notice, in order to improve the design and supply the best possible product.
Product data	Production	This data sheet contains data from the product specification. Philips Semiconductors reserves the right to make changes at any time in order to improve the design, manufacturing and supply. Changes will be communicated according to the Customer Product/Process Change Notification (CPCN) procedure SNW-SQ-650A.

#### **Notes**

- 1. Please consult the most recently issued data sheet before initiating or completing a design.
- 2. The product status of the device(s) described in this data sheet may have changed since this data sheet was published. The latest information is available on the Internet at URL http://www.semiconductors.philips.com.

## **DEFINITIONS**

**Short-form specification** — The data in a short-form specification is extracted from a full data sheet with the same type number and title. For detailed information see the relevant data sheet or data handbook.

Limiting values definition — Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 60134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

Application information — Applications that are described herein for any of these products are for illustrative purposes only. Philips Semiconductors make no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

## **DISCLAIMERS**

Life support applications — These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips Semiconductors customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips Semiconductors for any damages resulting from such application.

Right to make changes — Philips Semiconductors reserves the right to make changes, without notice, in the products, including circuits, standard cells, and/or software, described or contained herein in order to improve design and/or performance. Philips Semiconductors assumes no responsibility or liability for the use of any of these products, conveys no licence or title under any patent, copyright, or mask work right to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified.

# 50 V low $V_{CEsat}$ NPN transistor

PBSS4350T

NOTES

# 50 V low $V_{CEsat}$ NPN transistor

PBSS4350T

NOTES

# Philips Semiconductors – a worldwide company

#### **Contact information**

For additional information please visit http://www.semiconductors.philips.com. Fax: +31 40 27 24825 For sales offices addresses send e-mail to: sales.addresses@www.semiconductors.philips.com.

© Koninklijke Philips Electronics N.V. 2002

SCA74

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Printed in The Netherlands

613514/01/pp12

Date of release: 2002 Aug 08

Document order number: 9397 750 09916

Let's make things better.

Philips Semiconductors



