



## Tweeter ARV-104-03/4

Tweeter with fabric dome and a voice coil with kapton former for use in high quality domestic loudspeaker systems.

### ACOUSTICAL DATA


Rated noise power <sup>1)</sup>	45	W
Short term maximum power <sup>2)</sup>	200	W
Rated impedance	4	Ohm
Resonance frequency $F_s$	-	Hz
Rated frequency range	2500 - 18000	Hz
Sensitivity <sup>3)</sup>	91	dB

### MECHANICAL DATA

Voice coil carrier material	kapton	
Voice coil diameter	25.5	mm
Winding height of voice coil	2.3	mm
Yoke diameter	24.9	mm
Air gap height	3.5	mm
Magnet external diameter	72	mm
Magnet internal diameter	-	mm
Magnet height	15	mm
Compensating magnet external diameter	-	mm
Compensating magnet internal diameter	-	mm
Compensating magnet height	-	mm
Weight	0.6	kg


1) CSN IEC 268-5, without baffle, with a filter in according with pict., 100 hours uninterrupted.

2) CSN IEC 268-5, without baffle, with a filter in according with pict., 100 hours uninterrupted.

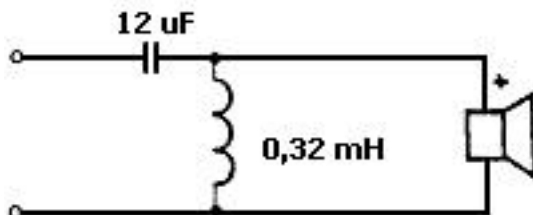

3) CSN IEC 268-5, standard baffle, 1 W, 1 m, 2500 - 18000 Hz

Frequency response

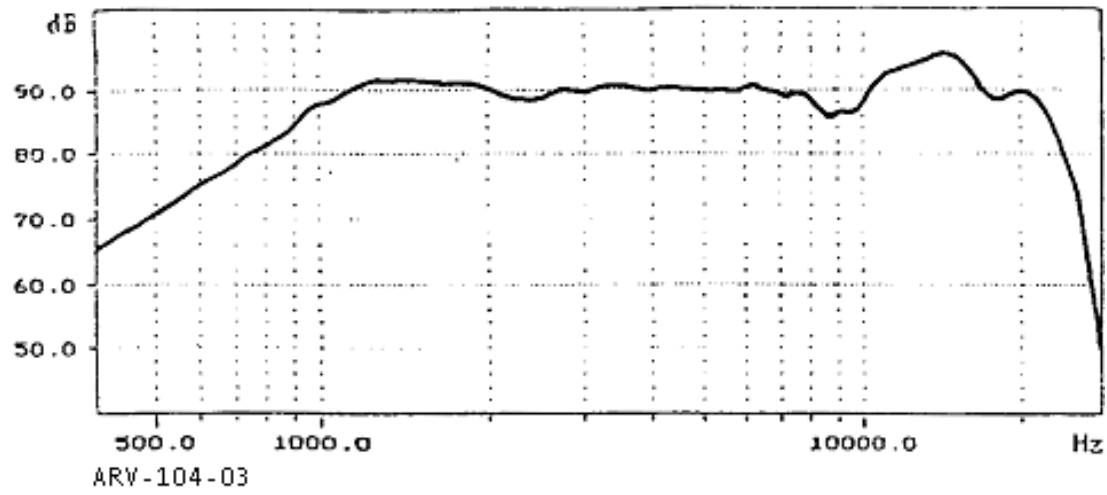

Drawing

